



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 151959]
Machine Id
JOHN DEERE 750K 1T0750KXKKF355243
Component
Transmission (Manual)
Fluid
JOHN DEERE HYDRAU (30 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051028	LEC0044948	LEC0036730
Sample Date		Client Info		12 Jun 2024	30 Nov 2023	14 Nov 2022
Machine Age	hrs	Client Info		3269	2725	2083
Oil Age	hrs	Client Info		3269	2725	2083
Filter Age	hrs	Client Info		1186	642	2083
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	23	20	13
Iron	ppm	ASTM D5185m	>200	34	31	31
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	1	1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>7	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	3	0	0
Lead	ppm	ASTM D5185m	>45	2	<1	<1
Copper	ppm	ASTM D5185m	>225	13	10	11
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	2	<1	1
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	<1
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		2	2	0
Calcium	ppm	ASTM D5185m	87	147	94	95
Phosphorus	ppm	ASTM D5185m	727	589	626	596
Zinc	ppm	ASTM D5185m	900	847	866	776
Sulfur	ppm	ASTM D5185m	1500	1643	1672	1842
Visc @ 40°C	cSt	ASTM D445	65	53.2	54.1	55.0

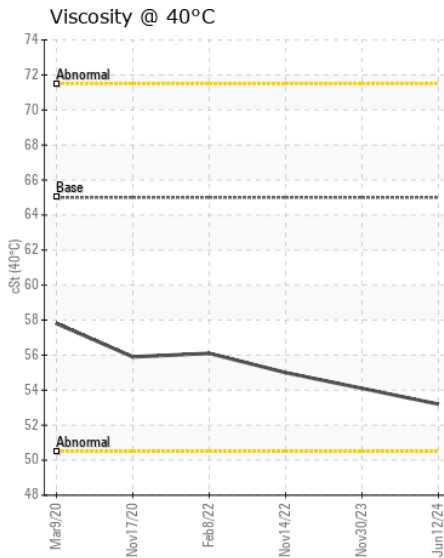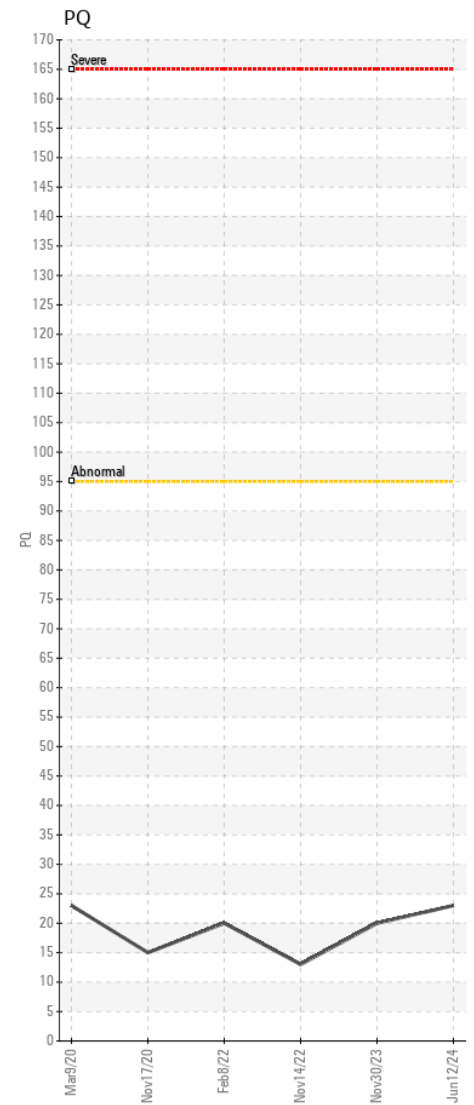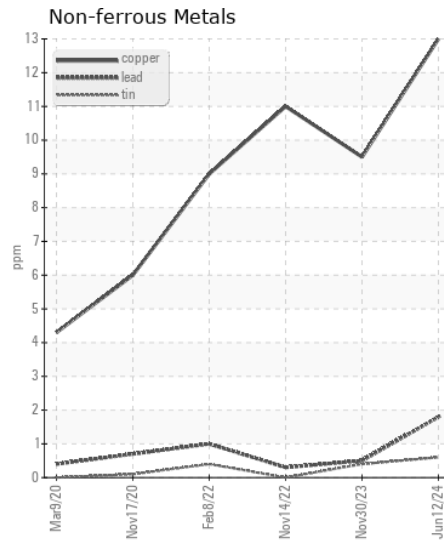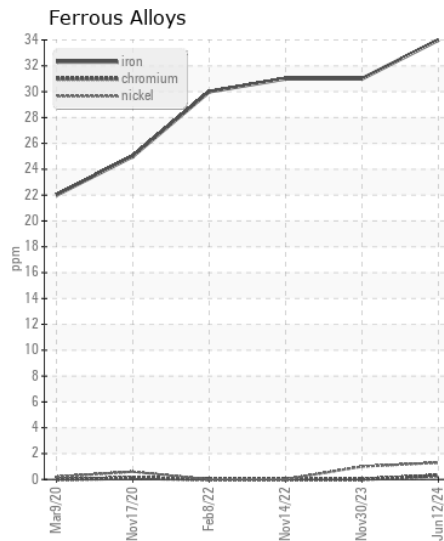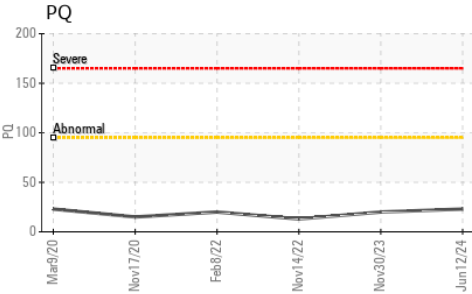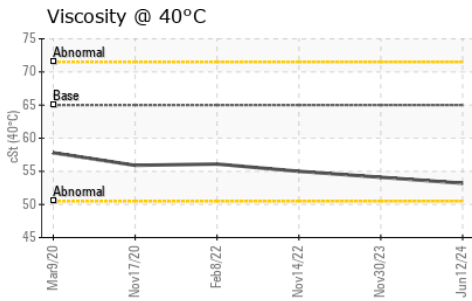

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051028 **Received** : 24 Jun 2024
Lab Number : 06218455 **Tested** : 25 Jun 2024
Unique Number : 11096652 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570