



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 310SL 1T0310SLAHF307747
 Component
Front Axle
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0213657 | --- | --- |
| Sample Date | | Client Info | | 14 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 3995 | --- | --- |
| Oil Age | hrs | Client Info | | 1800 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------|--------|-------------|-----------|--------------|----------|----------|
| PQ | | ASTM D8184 | | 137 | --- | --- |
| Iron | ppm | ASTM D5185m | >750 | 112 | --- | --- |
| Chromium | ppm | ASTM D5185m | >11 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >21 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m | >49 | 1 | --- | --- |
| Copper | ppm | ASTM D5185m | >101 | 131 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 2 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION







There is no indication of any contamination in the fluid.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|-------------|-----------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >31 | 16 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 3 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|-------------|-----|-------------|-----------|-------------|----------|----------|
| Sodium | ppm | ASTM D5185m | >51 | 1 | --- | --- |
| Boron | ppm | ASTM D5185m | 6 | 15 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | 1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | 2 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 5 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 145 | 96 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3570 | 3729 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1290 | 1091 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1640 | 1367 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3853 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 49.7 | --- | --- |

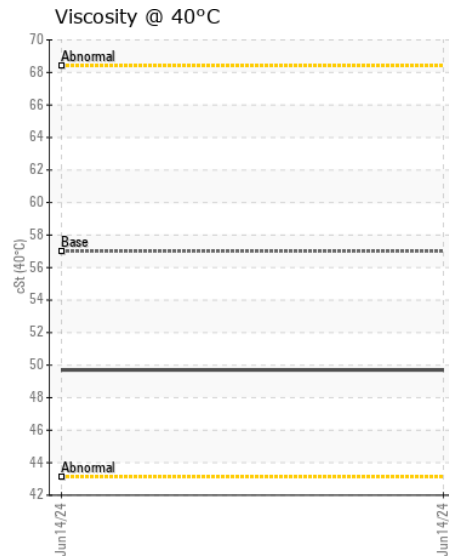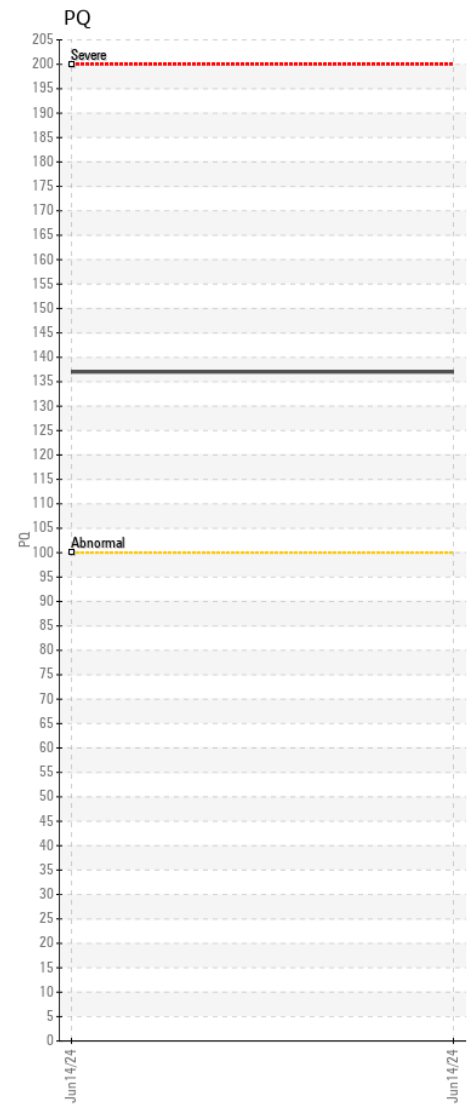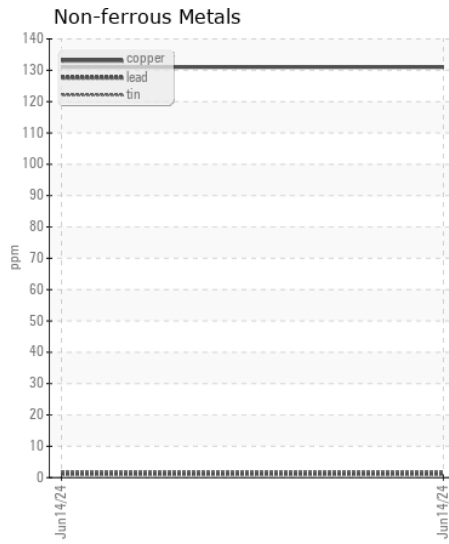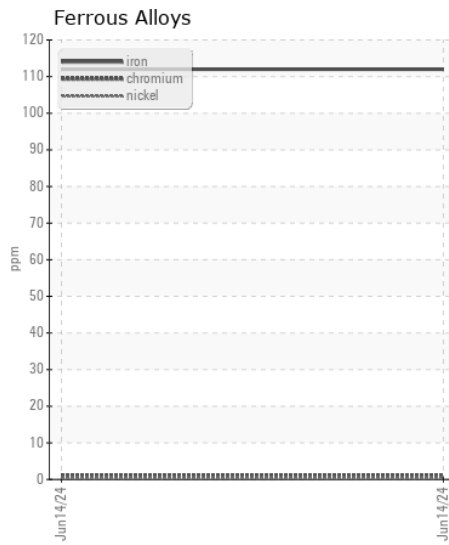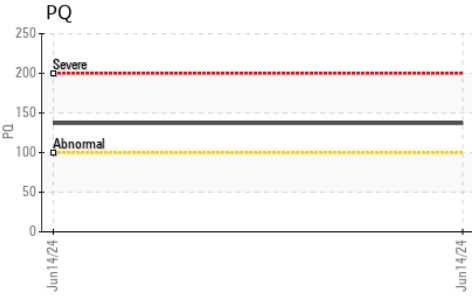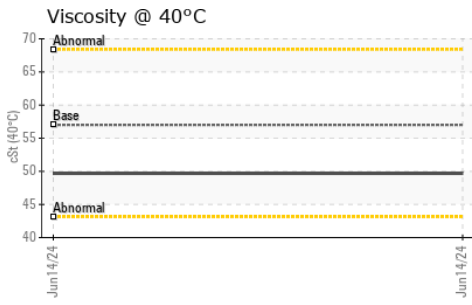

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0213657

Lab Number : 06218461

Unique Number : 11096658

Test Package : CONST (Additional Tests: PQ)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO

411 SOUTH REGIONAL ROAD

GREENSBORO, NC

US 27409

Contact: JUSTIN WILLIAMS

justin.williams@jamesriverequipment.com

T: (336)668-2762

F: (336)665-9556