



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 6120E 1P06120EKP5251753**

Component  
**Front Axle**

Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDH FLUID SAE 75W80. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213965</b>	---	---
Sample Date		Client Info		<b>20 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>687</b>	---	---
Oil Age	hrs	Client Info		<b>687</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>22</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>35</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>21	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>49	<b>3</b>	---	---
Copper	ppm	ASTM D5185m	>101	<b>8</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>16</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>6</b>	---	---
Boron	ppm	ASTM D5185m	10	<b>3</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>9</b>	---	---
Molybdenum	ppm	ASTM D5185m	10	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m	100	<b>101</b>	---	---
Calcium	ppm	ASTM D5185m	3500	<b>3615</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1039</b>	---	---
Zinc	ppm	ASTM D5185m	1150	<b>1280</b>	---	---
Sulfur	ppm	ASTM D5185m	5000	<b>3602</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>55.0</b>	---	---

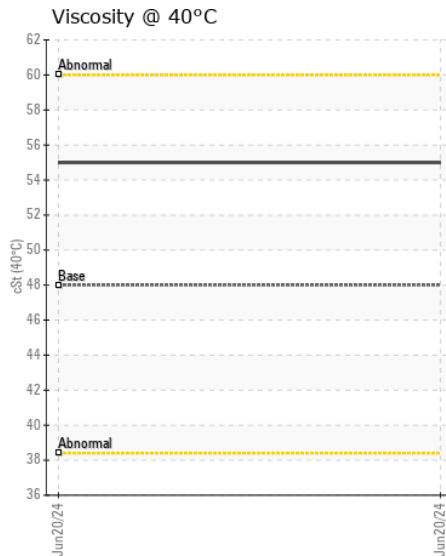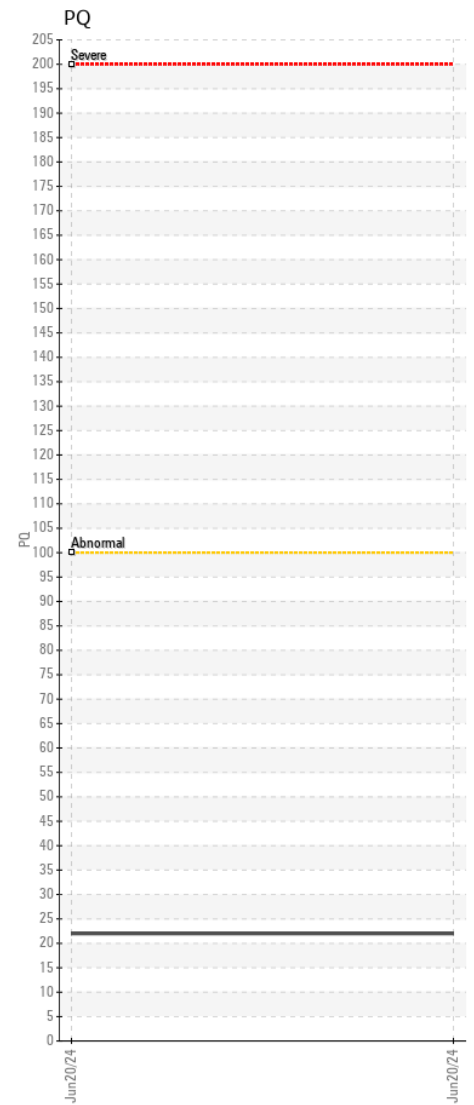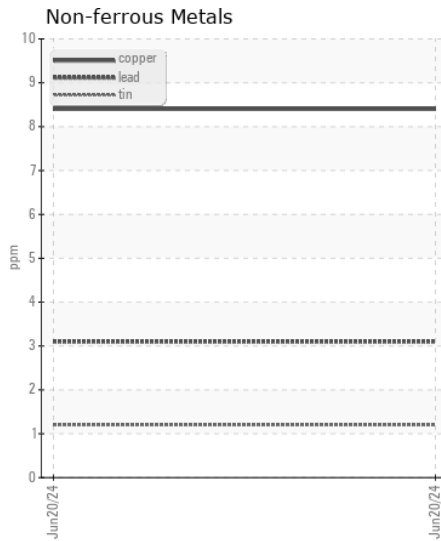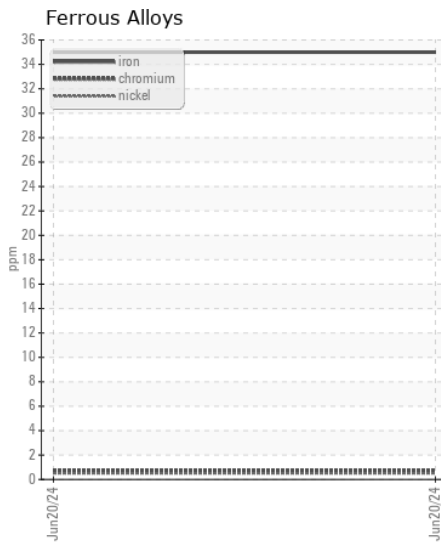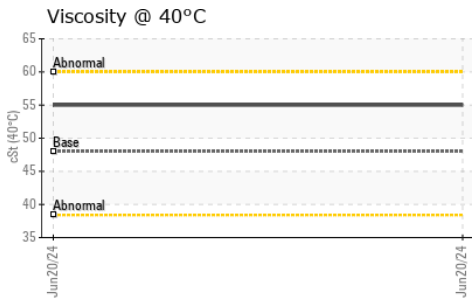

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0213965

**Lab Number** : 06218463

**Unique Number** : 11096660

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 24 Jun 2024

**Tested** : 25 Jun 2024

**Diagnosed** : 25 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENVILLE**

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: