



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W67876]

Machine Id
JOHN DEERE 844L 1DW844LXTNL715099

Component
Front Axle

Fluid
{not provided} (10 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: W67876)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0219433	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	hrs	Client Info		1016	---	---
Oil Age	hrs	Client Info		1016	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		918	---	---
Iron	ppm	ASTM D5185m	>750	1409	---	---
Chromium	ppm	ASTM D5185m	>11	6	---	---
Nickel	ppm	ASTM D5185m	>10	3	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>21	3	---	---
Lead	ppm	ASTM D5185m	>49	14	---	---
Copper	ppm	ASTM D5185m	>101	▲ 192	---	---
Tin	ppm	ASTM D5185m	>10	3	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	16	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	18	---	---
Boron	ppm	ASTM D5185m		103	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		7	---	---
Manganese	ppm	ASTM D5185m		49	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m		3450	---	---
Phosphorus	ppm	ASTM D5185m		1113	---	---
Zinc	ppm	ASTM D5185m		1345	---	---
Sulfur	ppm	ASTM D5185m		3154	---	---
Visc @ 40°C	cSt	ASTM D445		64.4	---	---

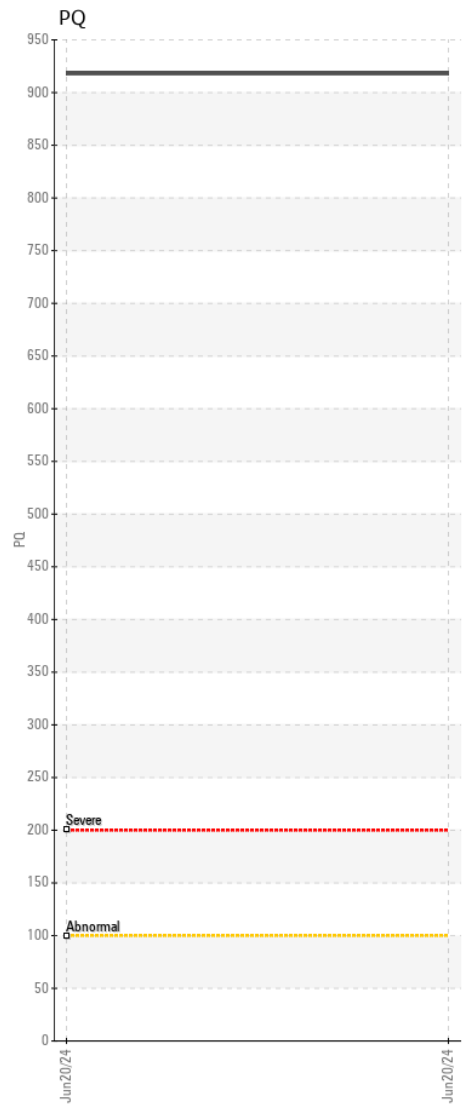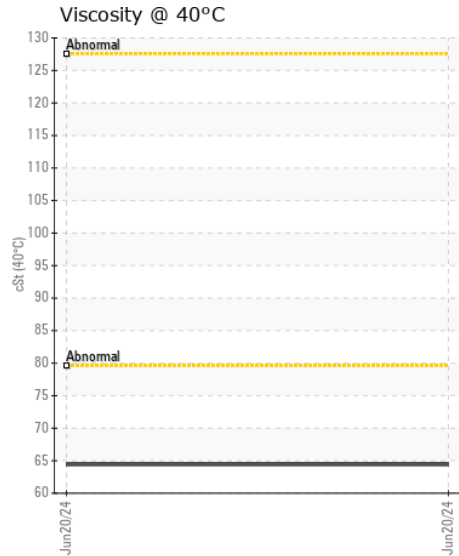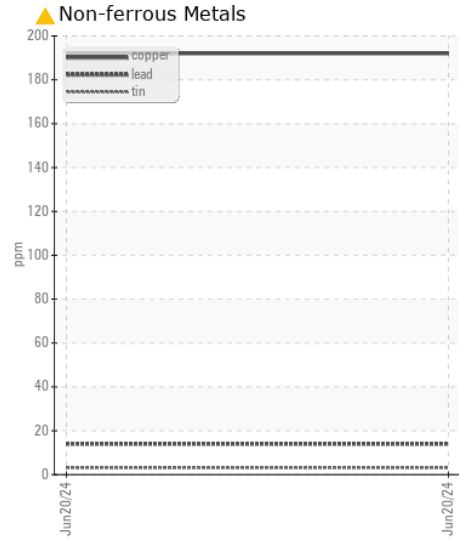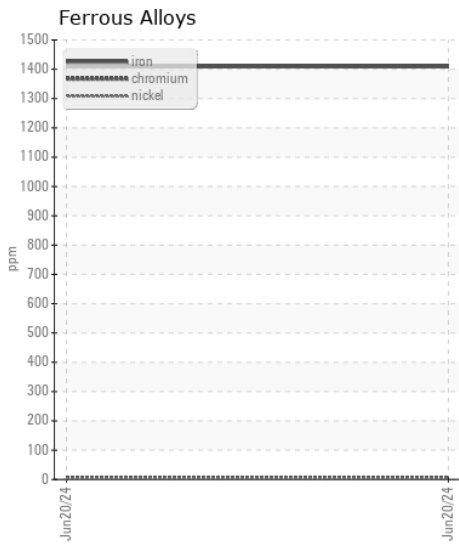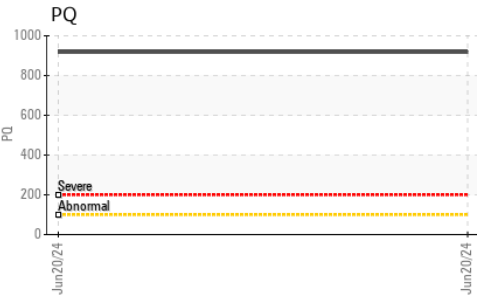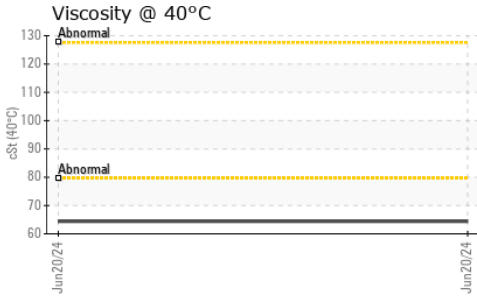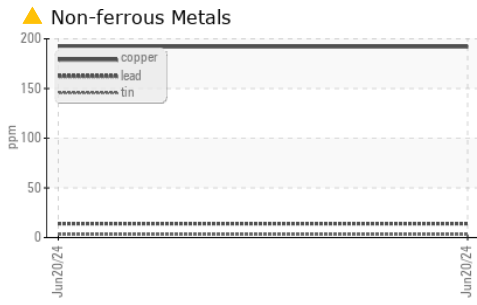

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0219433 **Received** : 24 Jun 2024
Lab Number : 06218467 **Tested** : 25 Jun 2024
Unique Number : 11096664 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211

F: (704)596-6198