



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SW RODGERS]
 Machine Id
JOHN DEERE 135P 7237 (S/N 1FF135PAENF000132)
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218243	JR0205320	---
Sample Date		Client Info		20 Jun 2024	19 Mar 2024	---
Machine Age	hrs	Client Info		2418	972	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	148	177	---
Iron	ppm	ASTM D5185m	>750	342	146	---
Chromium	ppm	ASTM D5185m	>9	6	3	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>40	3	3	---
Lead	ppm	ASTM D5185m	>15	<1	0	---
Copper	ppm	ASTM D5185m	>40	2	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	21	30	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	<1	---
Boron	ppm	ASTM D5185m		59	47	---
Barium	ppm	ASTM D5185m		4	4	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		8	2	---
Magnesium	ppm	ASTM D5185m		1	1	---
Calcium	ppm	ASTM D5185m		36	50	---
Phosphorus	ppm	ASTM D5185m		504	472	---
Zinc	ppm	ASTM D5185m		24	46	---
Sulfur	ppm	ASTM D5185m		15647	17485	---
Visc @ 40°C	cSt	ASTM D445		187	180	---

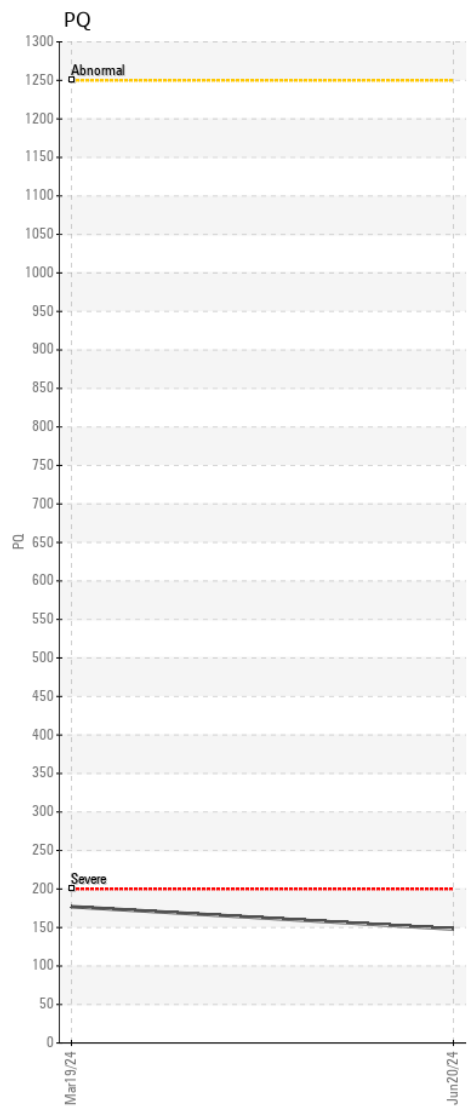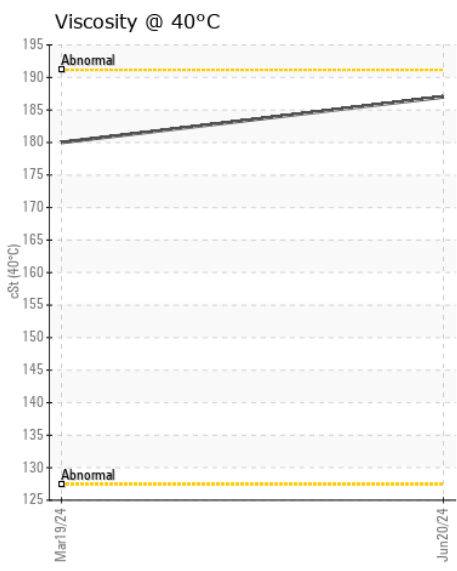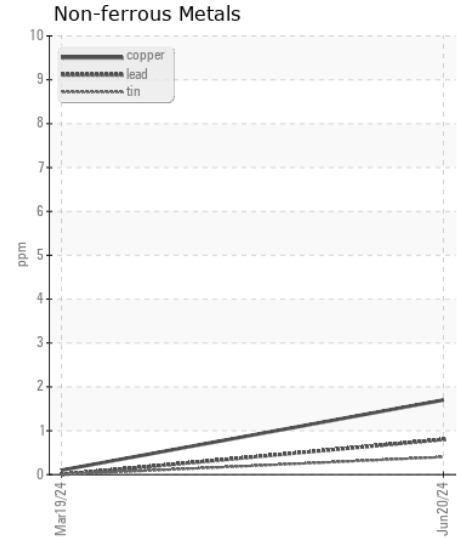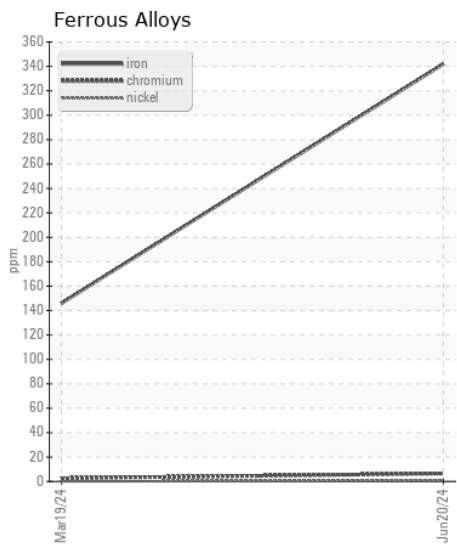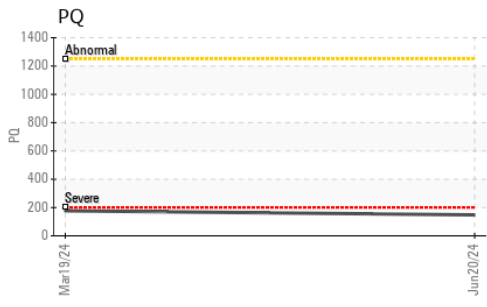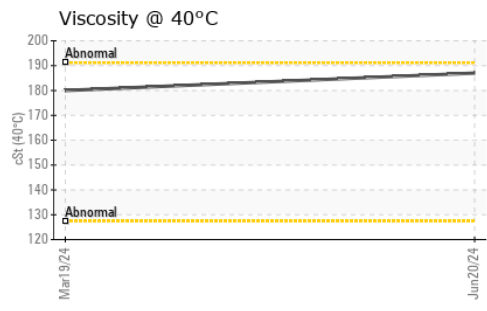

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218243 **Received** : 24 Jun 2024
Lab Number : 06218474 **Tested** : 25 Jun 2024
Unique Number : 11096671 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111
 Contact: DON VEST
 dvest@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)