



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[05W47477]
 Machine Id
CATERPILLAR 938 C328098 (S/N EZY00588)
 Component
Rear Differential
 Fluid
CAT TDTO SAE 50 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0225321	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	hrs	Client Info		305	---	---
Oil Age	hrs	Client Info		305	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		39	---	---
Iron	ppm	ASTM D5185m	>500	40	---	---
Chromium	ppm	ASTM D5185m	>3	2	---	---
Nickel	ppm	ASTM D5185m	>3	2	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>30	3	---	---
Lead	ppm	ASTM D5185m	>13	<1	---	---
Copper	ppm	ASTM D5185m	>103	8	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	9	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		12	---	---
Boron	ppm	ASTM D5185m		111	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		9	---	---
Calcium	ppm	ASTM D5185m	2980	3418	---	---
Phosphorus	ppm	ASTM D5185m	1100	1112	---	---
Zinc	ppm	ASTM D5185m	1270	1393	---	---
Sulfur	ppm	ASTM D5185m		3945	---	---
Visc @ 40°C	cSt	ASTM D445	195	59.4	---	---

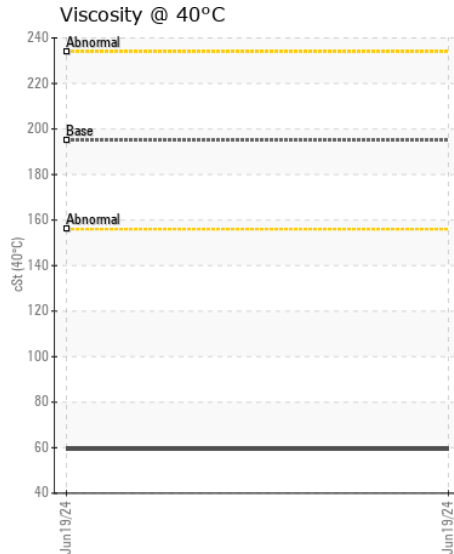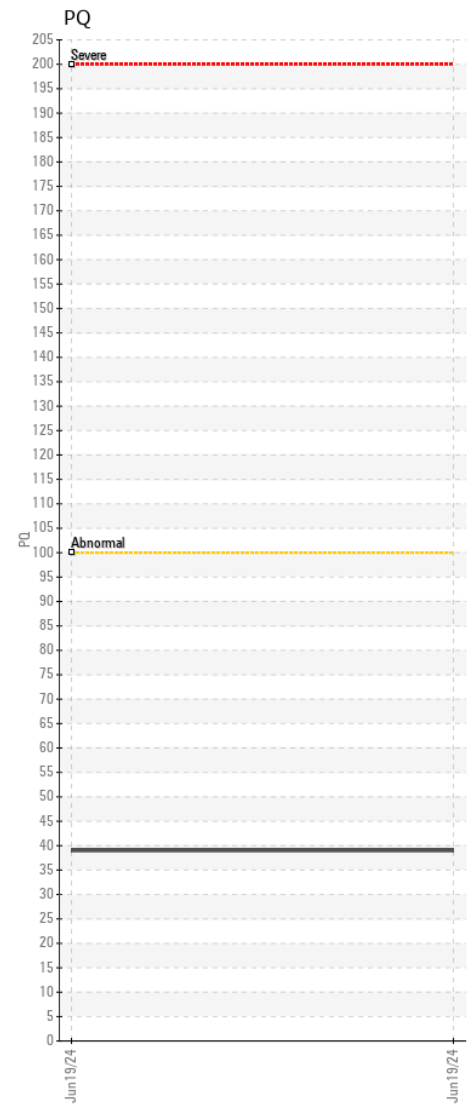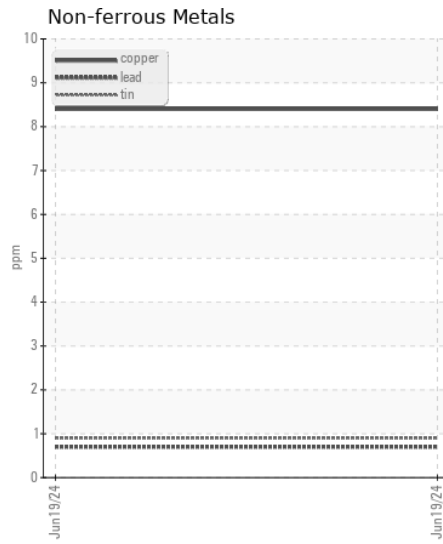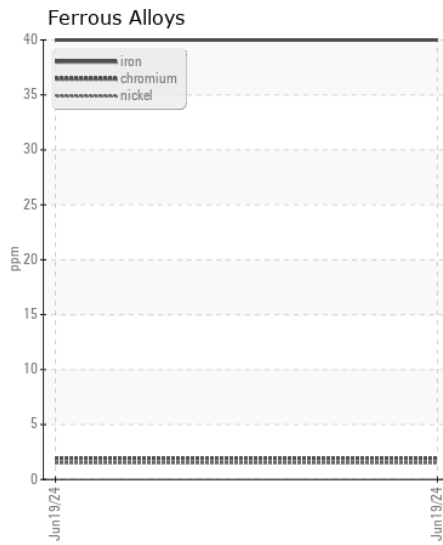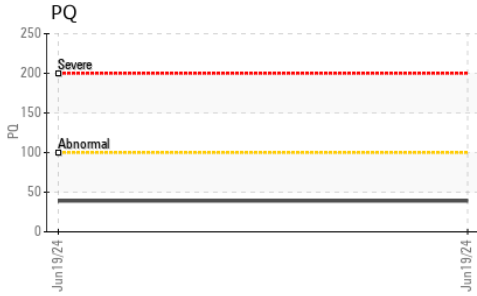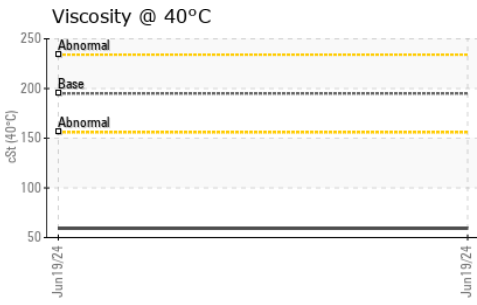

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0225321

Lab Number : 06218475

Unique Number : 11096672

Test Package : CONST (Additional Tests: PQ)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TITAN VIRGINIA READY MIX LLC

5700 LAKEWRIGHT DR, SUITE 300

NORFOLK, VA

US 23502

Contact: ROBERT TAUBER

rtauber@titanamerica.com

T: (571)436-2579

F: