



OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL

Area
[G15429]

Machine Id
JOHN DEERE 350G 812159

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.










CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a light concentration of water present in the oil.

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007097	---	---
Sample Date		Client Info		18 Jun 2024	---	---
Machine Age	hrs	Client Info		3115	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184	>1250	282	---	---
Iron	ppm	ASTM D5185m	>750	▲ 2097	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 22	---	---
Nickel	ppm	ASTM D5185m	>10	5	---	---
Titanium	ppm	ASTM D5185m		5	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>40	● 44	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	5	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	▲ 412	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Water	%	ASTM D6304	>0.075	▲ 0.217	---	---
ppm Water	ppm	ASTM D6304	>750	▲ 2170	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	▲ 0.2%	---	---
Sodium	ppm	ASTM D5185m	>51	1	---	---
Boron	ppm	ASTM D5185m		18	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		20	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m		113	---	---
Phosphorus	ppm	ASTM D5185m		317	---	---
Zinc	ppm	ASTM D5185m		24	---	---
Sulfur	ppm	ASTM D5185m		17388	---	---
Visc @ 40°C	cSt	ASTM D445		204	---	---

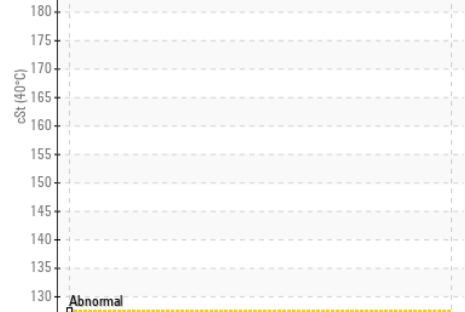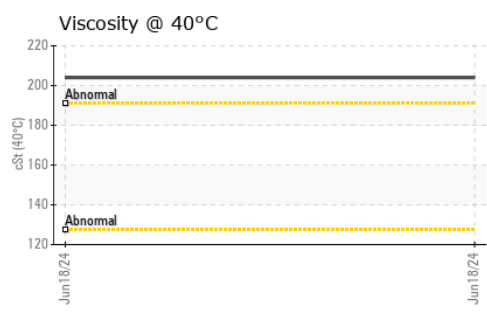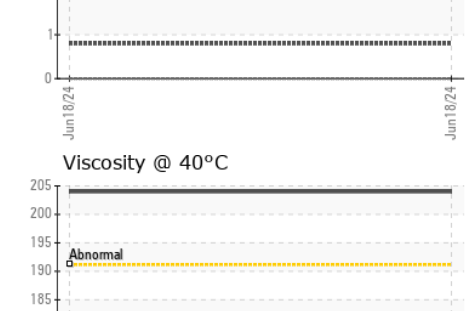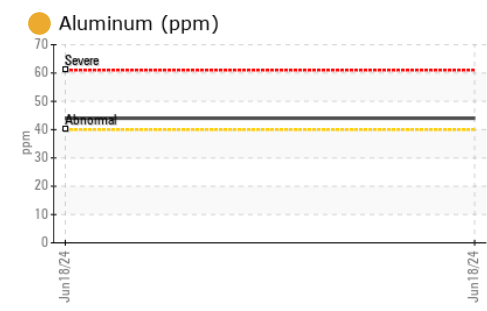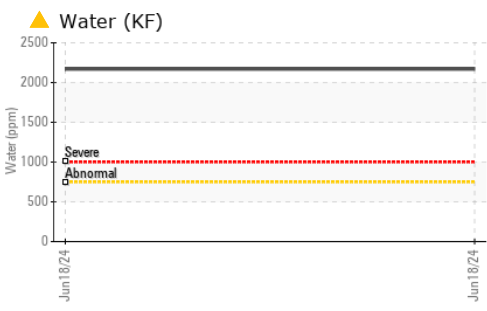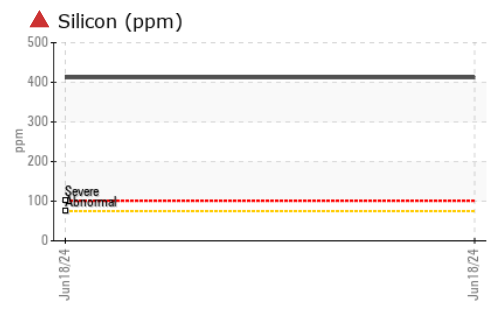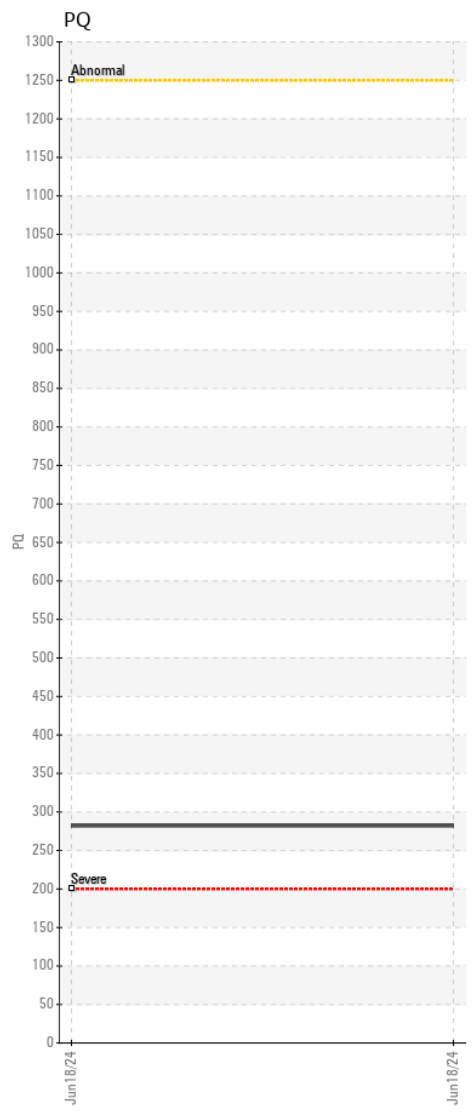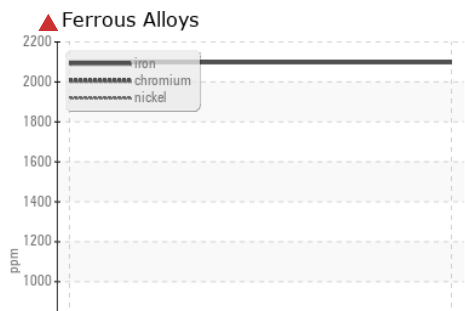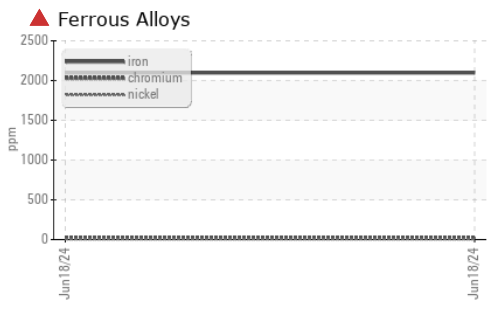

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007097 **Received** : 24 Jun 2024
Lab Number : 06218481 **Tested** : 25 Jun 2024
Unique Number : 11096678 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: KF, PQ)

WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE
 4308 WATER TRAIL
 GRAYSVILLE, AL
 US 35073
 Contact: BEN BYRKET
 bbyrket@warriortractor.com
 T: (205)675-9045
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)