



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area

**[W8906]**

Machine Id

**JOHN DEERE 624K C109480 (S/N 1DW624KHKA0630110)**

Component

**Rear Differential**

Fluid

**JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W8906 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0196932</b>	JR0183158	JR0141198
Sample Date		Client Info		<b>19 Jun 2024</b>	04 Dec 2023	13 May 2023
Machine Age	hrs	Client Info		<b>23637</b>	22346	21252
Oil Age	hrs	Client Info		<b>1291</b>	22346	3000
Filter Age	hrs	Client Info		<b>0</b>	0	888
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>19</b>	12	12
Iron	ppm	ASTM D5185m	>500	<b>37</b>	30	28
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	0	<1
Lead	ppm	ASTM D5185m	>25	<b>19</b>	51	26
Copper	ppm	ASTM D5185m	>100	<b>8</b>	17	10
Tin	ppm	ASTM D5185m	>10	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	<b>11</b>	3	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		<b>0</b>	1	1
Boron	ppm	ASTM D5185m		<b>1</b>	2	2
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	1	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>88</b>	48	55
Calcium	ppm	ASTM D5185m		<b>3498</b>	3141	3206
Phosphorus	ppm	ASTM D5185m		<b>1065</b>	1124	1138
Zinc	ppm	ASTM D5185m		<b>1244</b>	1199	1296
Sulfur	ppm	ASTM D5185m		<b>3789</b>	3650	4636
Visc @ 40°C	cSt	ASTM D445	59	<b>56.5</b>	53.2	54.0

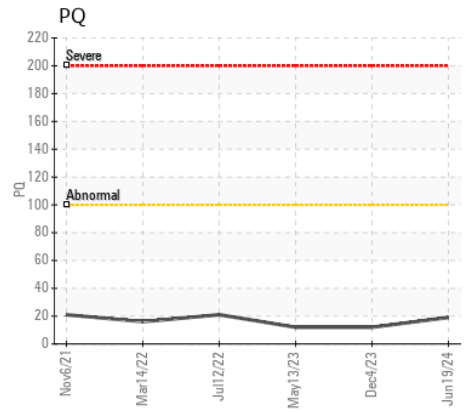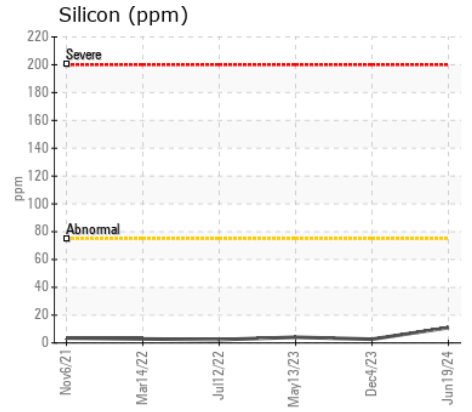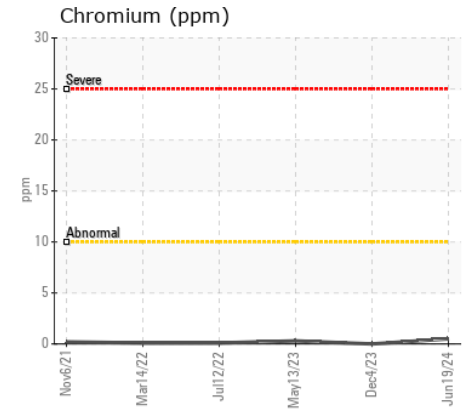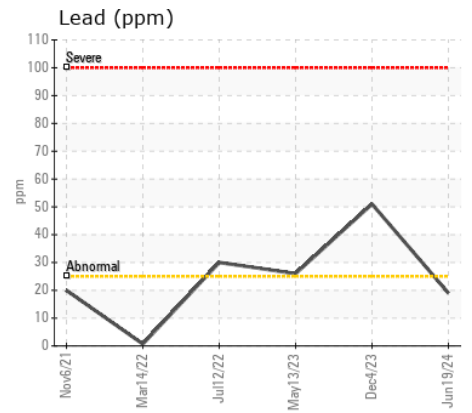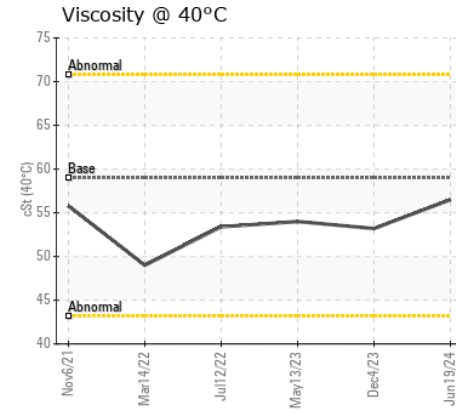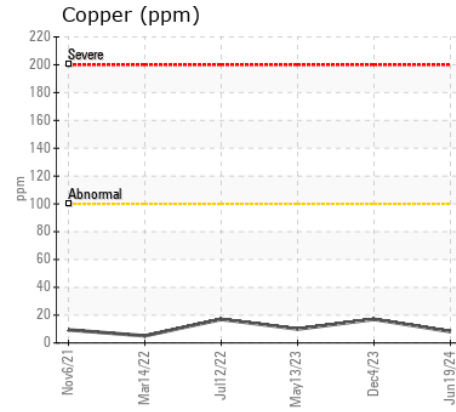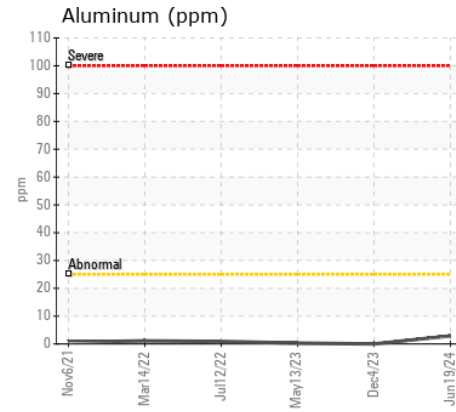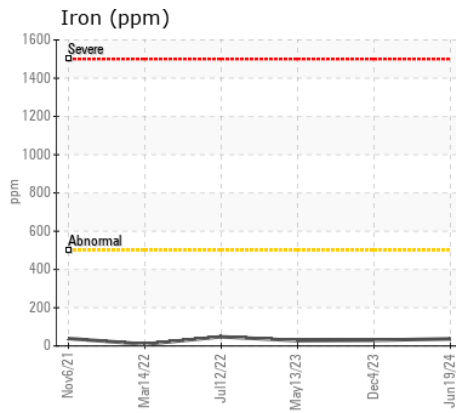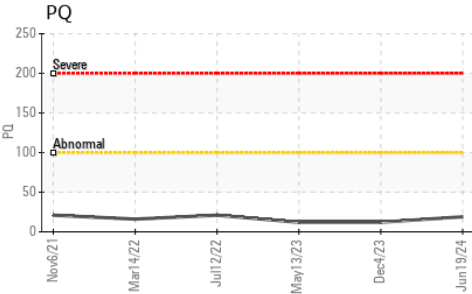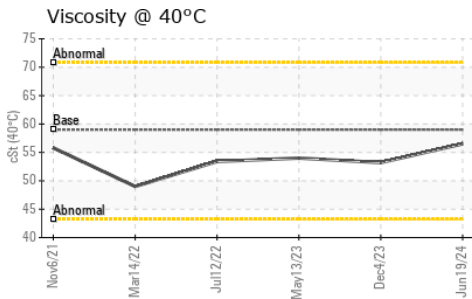

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0196932 **Received** : 24 Jun 2024  
**Lab Number** : 06218513 **Tested** : 25 Jun 2024  
**Unique Number** : 11096710 **Diagnosed** : 26 Jun 2024 - Sean Felton  
**Test Package** : MOBCE ( Additional Tests: PQ )

**JRE - HOPE MILLS/FAYETTEVILLE**  
 5039 HWY 301 SOUTH  
 HOPE MILLS, NC  
 US 28348

Contact: FAYETTEVILLE SHOP  
 stephen.mullis@jamesriverequipment.com; panastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: