



OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	SEVERE
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 152218]
Machine Id
JOHN DEERE 325G 1T0325GMJKJ349749
Component
Right Drive Chain Case
Fluid
JOHN DEERE GL-5 80W90 (27 Oz)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051057	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	hrs	Client Info		2368	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

WEAR

Gear wear is indicated.

PQ		ASTM D8184		97	---	---
Iron	ppm	ASTM D5185m	>200	▲ 2270	---	---
Chromium	ppm	ASTM D5185m	>10	▲ 27	---	---
Nickel	ppm	ASTM D5185m	>10	▲ 20	---	---
Titanium	ppm	ASTM D5185m		6	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m		● 61	---	---
Lead	ppm	ASTM D5185m		1	---	---
Copper	ppm	ASTM D5185m		5	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		2	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m		▲ 382	---	---
Potassium	ppm	ASTM D5185m	>20	30	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m		29	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		8	---	---
Manganese	ppm	ASTM D5185m		19	---	---
Magnesium	ppm	ASTM D5185m		82	---	---
Calcium	ppm	ASTM D5185m		2779	---	---
Phosphorus	ppm	ASTM D5185m		832	---	---
Zinc	ppm	ASTM D5185m		927	---	---
Sulfur	ppm	ASTM D5185m		3641	---	---
Visc @ 40°C	cSt	ASTM D445		88.2	---	---

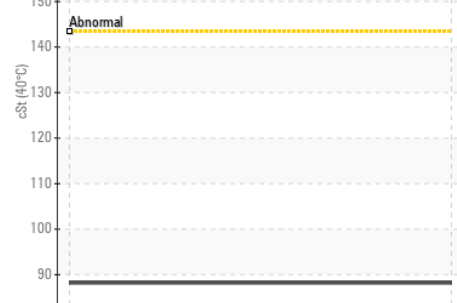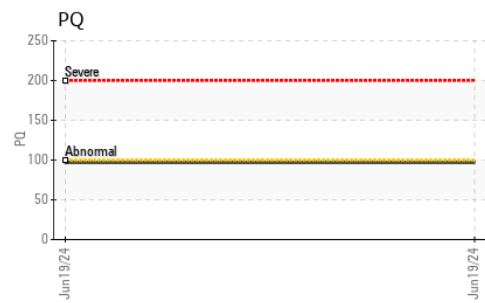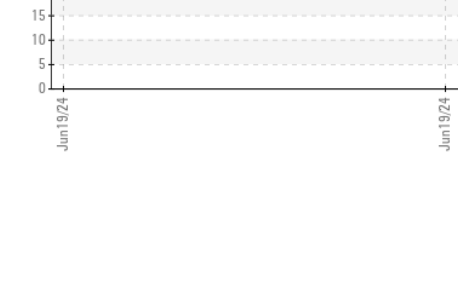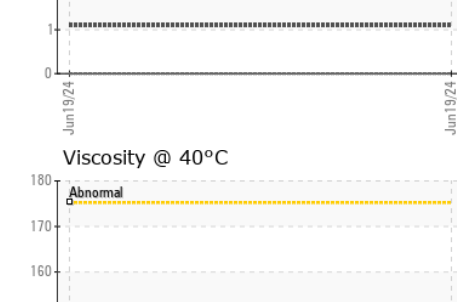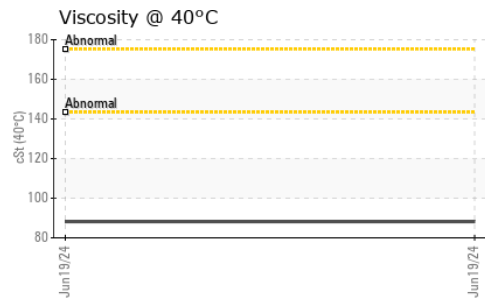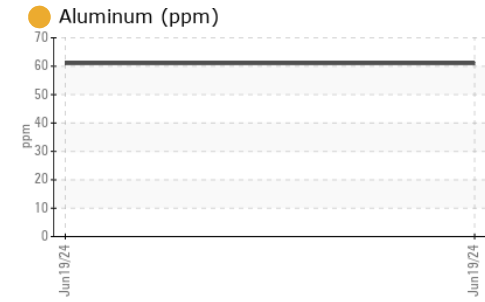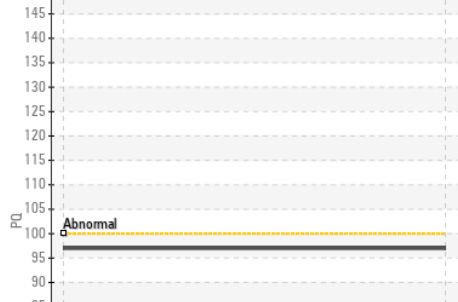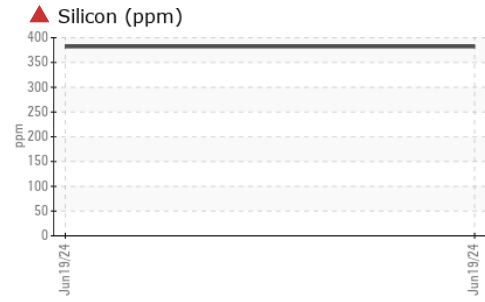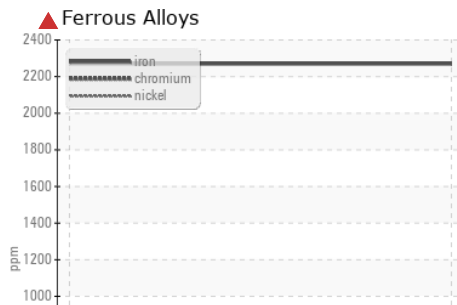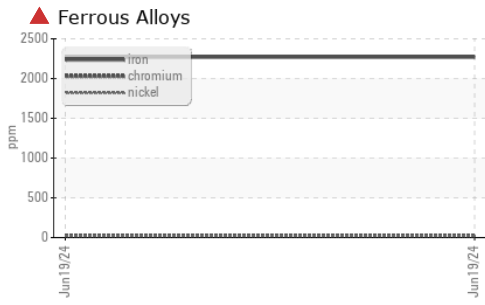

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051057 **Received** : 24 Jun 2024
Lab Number : 06218544 **Tested** : 25 Jun 2024
Unique Number : 11096741 **Diagnosed** : 26 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570