



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[578187]
 Machine Id
VOLVO L220H 3197
 Component
Front Axle
 Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP430332	VCP409625	VCP363284
Sample Date		Client Info		20 Jun 2024	28 Mar 2023	20 Jun 2022
Machine Age	hrs	Client Info		9053	6366	4933
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	28	116	81
Chromium	ppm	ASTM D5185m	>20	<1	2	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	2
Aluminum	ppm	ASTM D5185m	>30	3	2	2
Lead	ppm	ASTM D5185m	>50	<1	<1	<1
Copper	ppm	ASTM D5185m	>120	1	2	2
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	18	13	14
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	5	8
Boron	ppm	ASTM D5185m		131	107	116
Barium	ppm	ASTM D5185m		1	0	<1
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m		16	8	13
Calcium	ppm	ASTM D5185m		4161	3222	3513
Phosphorus	ppm	ASTM D5185m		1390	1157	1173
Zinc	ppm	ASTM D5185m		1685	1390	1451
Sulfur	ppm	ASTM D5185m		4055	3554	3644
Visc @ 40°C	cSt	ASTM D445	55	43.2	38.9	40.1

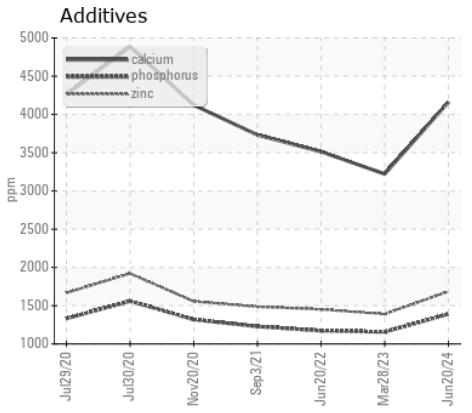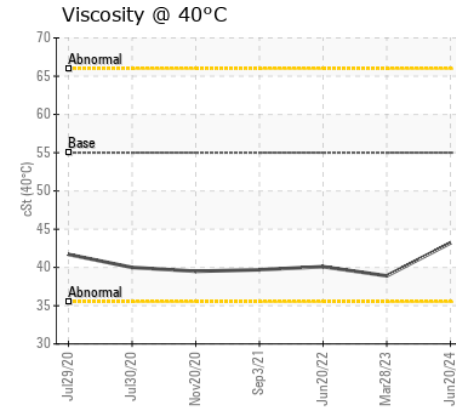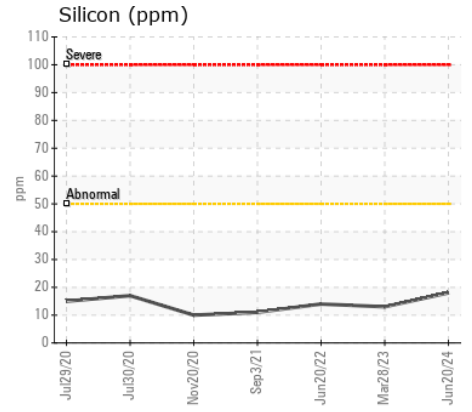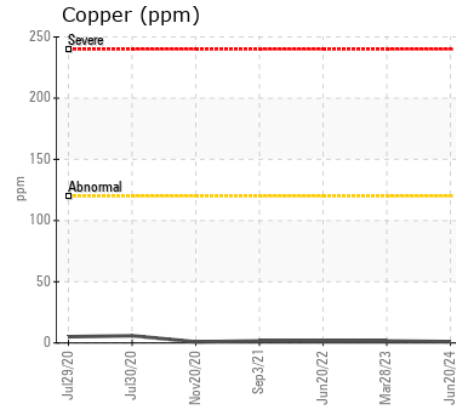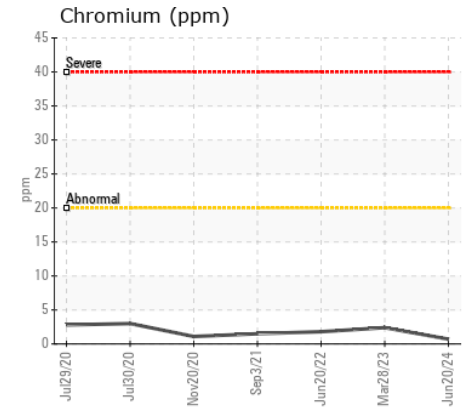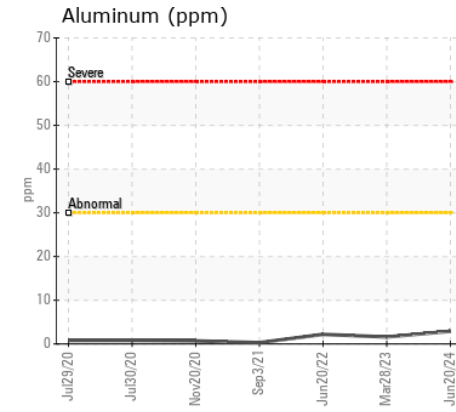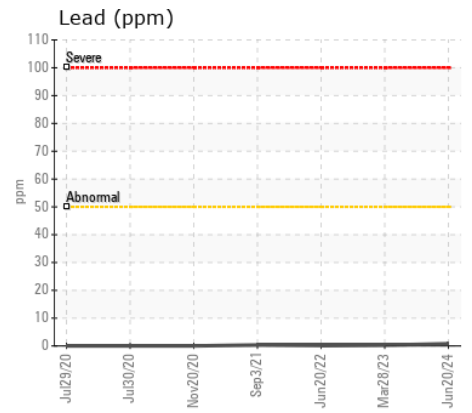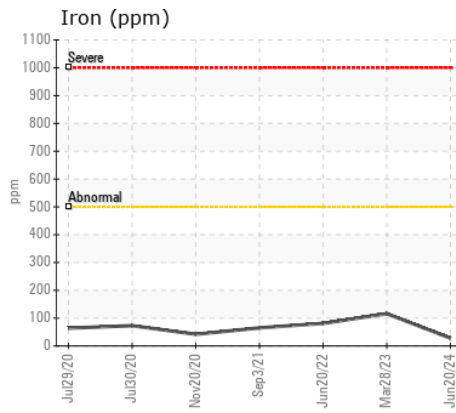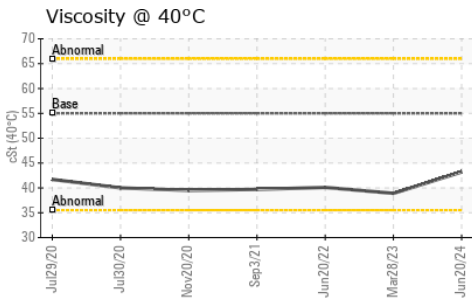

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP430332
Lab Number : 06218579
Unique Number : 11096776
Test Package : MOB 1

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

CALLANAN
 RT 32 677 FLATBUSH RD
 EAST KINGSTON, NY
 US 12401
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: