



OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
930
 Component
Transfer Case
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | NL0002032 | --- | --- |
| Sample Date | | Client Info | | 16 Apr 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 13947 | --- | --- |
| Oil Age | hrs | Client Info | | 500 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Not Changed | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

The copper level is abnormal. All other component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|-------|-----|-----|
| Iron | ppm | ASTM D5185m | >500 | 260 | --- | --- |
| Chromium | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >45 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m | >150 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >100 | ▲ 194 | --- | --- |
| Tin | ppm | ASTM D5185m | >5 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION






There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >85 | 14 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 3 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | LIGHT | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|-------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 4 | --- | --- |
| Boron | ppm | ASTM D5185m | 400 | 107 | --- | --- |
| Barium | ppm | ASTM D5185m | 200 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 12 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 4 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 12 | 2 | --- | --- |
| Calcium | ppm | ASTM D5185m | 150 | 55 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1650 | 1031 | --- | --- |
| Zinc | ppm | ASTM D5185m | 125 | 70 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 22500 | 20137 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 109 | 95.8 | --- | --- |

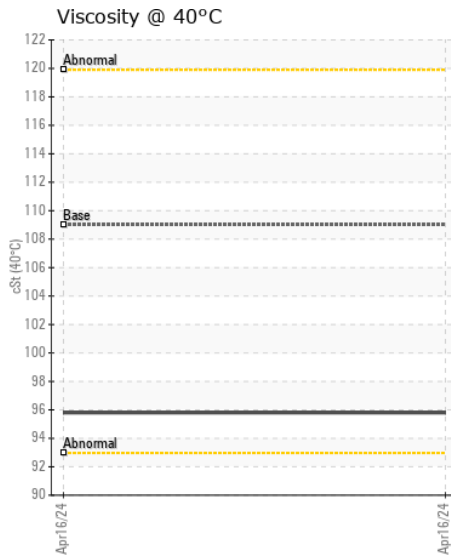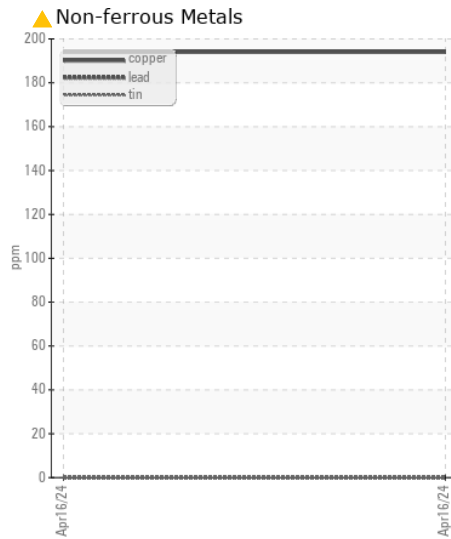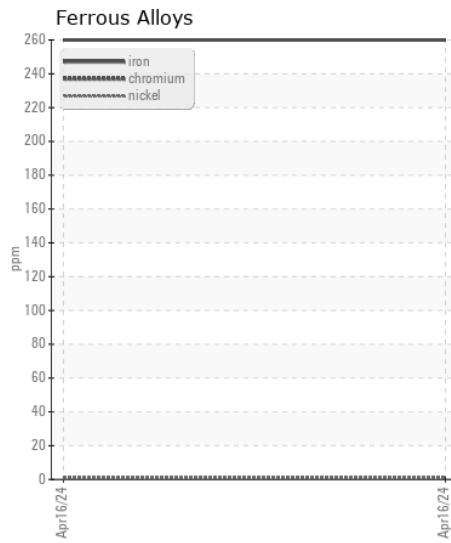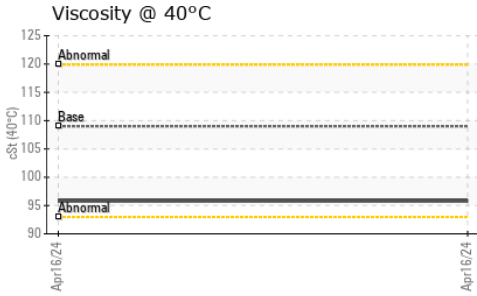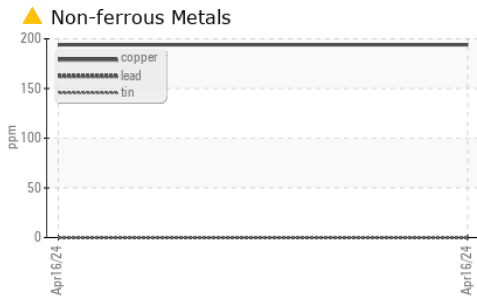

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : NL0002032
Lab Number : 06218645
Unique Number : 11096842
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 26 Jun 2024 - Sean Felton

FOX & JAMES NATIONALEASE - Manassas
 1145 INDUSTRIAL RD
 MANASSAS, VA
 US 20109
 Contact: JOSH ROLAND
 j.roland@foxandjames.com
 T: (571)379-5296
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)