



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CHEVROLET W-2
 Component
Gasoline Engine
 Fluid
GASOLINE ENGINE OIL SAE 5W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001309	---	---
Sample Date		Client Info		23 Jun 2024	---	---
Machine Age	mls	Client Info		56214	---	---
Oil Age	mls	Client Info		3026	---	---
Filter Age	mls	Client Info		3026	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	14	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>40	4	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	10	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>30	11	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	4	---	---
Boron	ppm	ASTM D5185m	75	18	---	---
Barium	ppm	ASTM D5185m	5	1	---	---
Molybdenum	ppm	ASTM D5185m	100	82	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	12	430	---	---
Calcium	ppm	ASTM D5185m	2100	1078	---	---
Phosphorus	ppm	ASTM D5185m	650	704	---	---
Zinc	ppm	ASTM D5185m	850	740	---	---
Sulfur	ppm	ASTM D5185m	2500	2074	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.57	---	---
Visc @ 100°C	cSt	ASTM D445	10.9	10.7	---	---

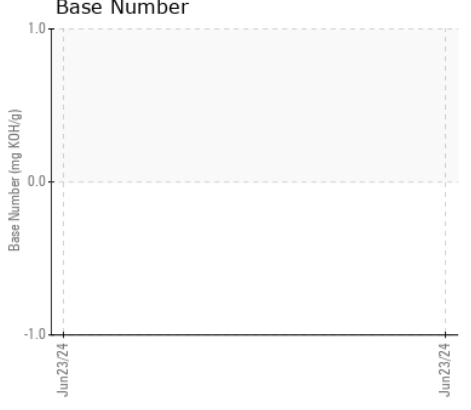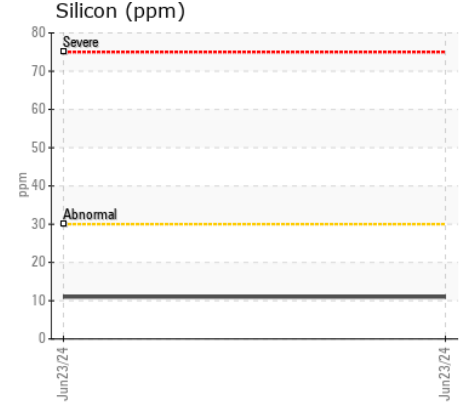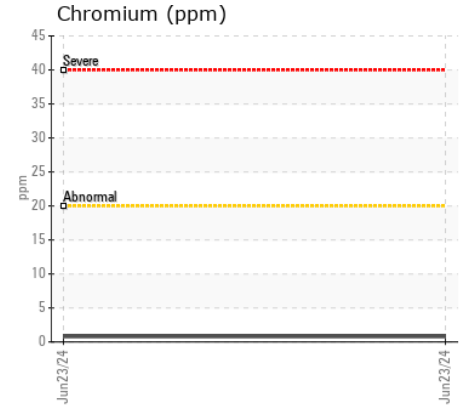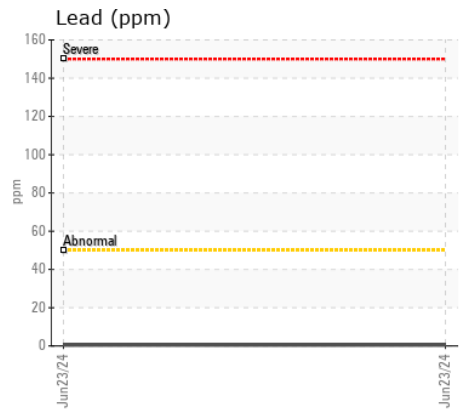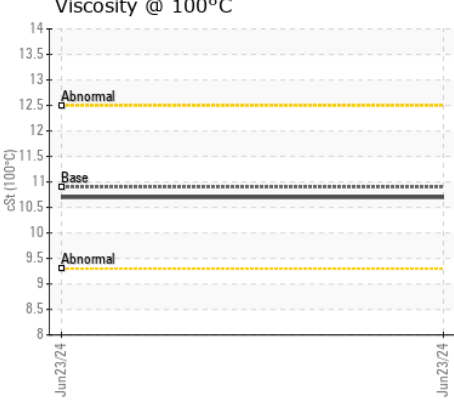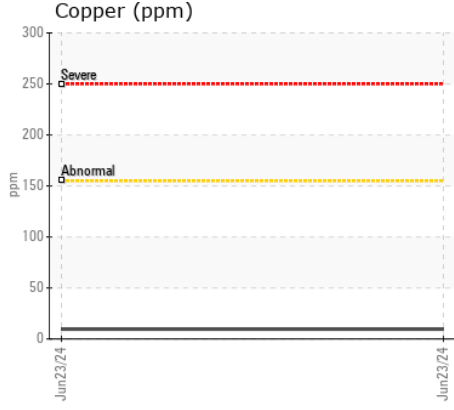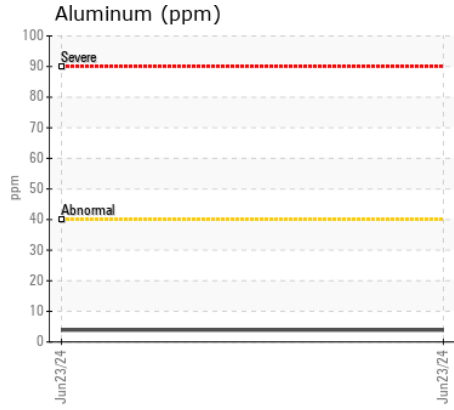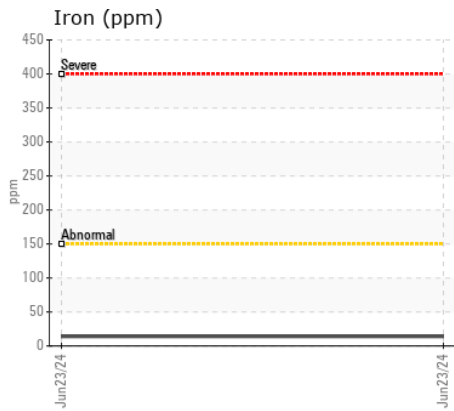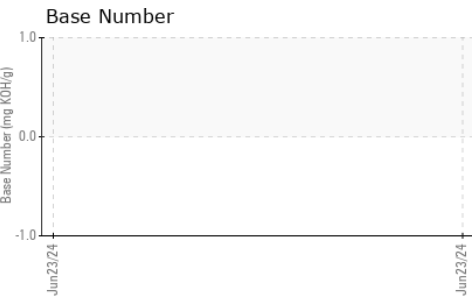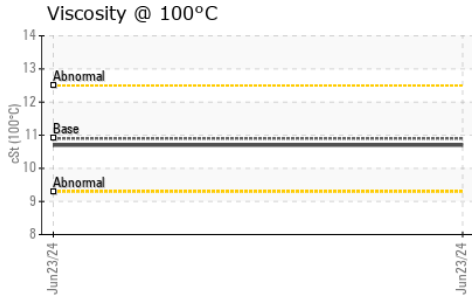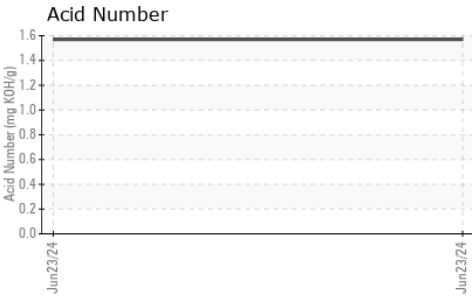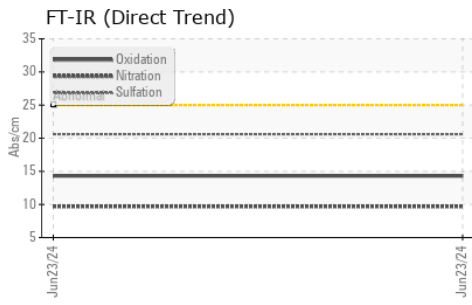

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LP0001309 Received : 24 Jun 2024
 Lab Number : 06218874 Tested : 26 Jun 2024
 Unique Number : 11097071 Diagnosed : 26 Jun 2024 - Jonathan Hester
 Test Package : MOB 2 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TOWN OF NEWPORT
 15 SUNAPEE ST
 NEWPORT, NH
 US 03773

Contact: DON FREITAS
 mechanics@newportnh.gov

T:
 F: