



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CRYSTAL D TAYLOR**  
Machine Id  
[CRYSTAL D TAYLOR] 003 503329-3  
Component  
Starboard Main Engine  
Fluid  
CHEVRON DELO 710 LS (250 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0055621</b>	MW0055618	MW06210910
Sample Date		Client Info		<b>29 May 2024</b>	15 May 2024	01 May 2024
Machine Age	hrs	Client Info		<b>49543</b>	49203	48871
Oil Age	hrs	Client Info		<b>0</b>	1642	1310
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>9</b>	8	7
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	3	1
Lead	ppm	ASTM D5185m	>18	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>80	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	7.3	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.5</b>	14.2	14.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>5</b>	3	3
Boron	ppm	ASTM D5185m		<b>42</b>	43	46
Barium	ppm	ASTM D5185m		<b>1</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>48</b>	46	47
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>12</b>	12	27
Calcium	ppm	ASTM D5185m		<b>3336</b>	3307	3538
Phosphorus	ppm	ASTM D5185m		<b>19</b>	25	13
Zinc	ppm	ASTM D5185m		<b>8</b>	8	13
Sulfur	ppm	ASTM D5185m		<b>2305</b>	2445	2543
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.9</b>	7.5	7.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>9.33</b>	9.45	8.31
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.0</b>	14.1	14.0


**FT-IR (Direct Trend)**

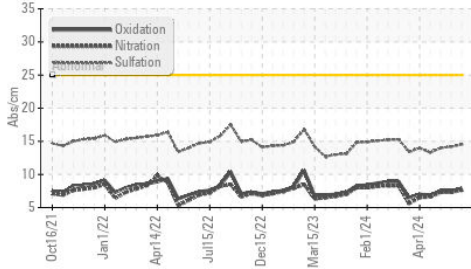


**Base Number**

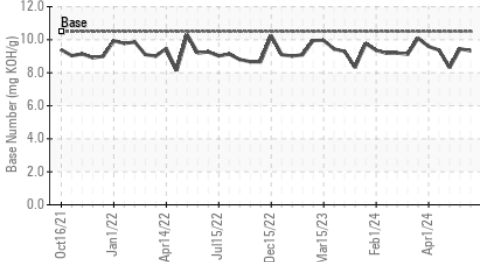


**Viscosity @ 100°C**

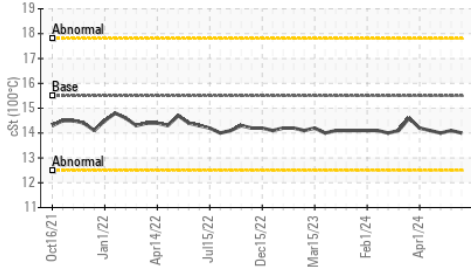


**Ferrous Alloys**

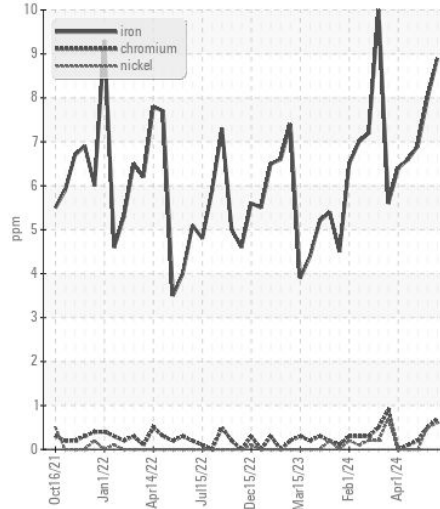


**Non-ferrous Metals**

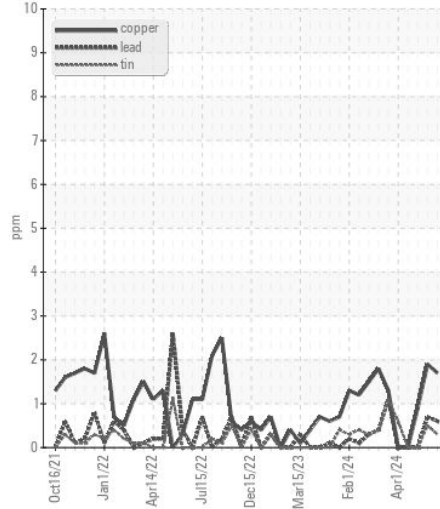

**Viscosity @ 100°C**

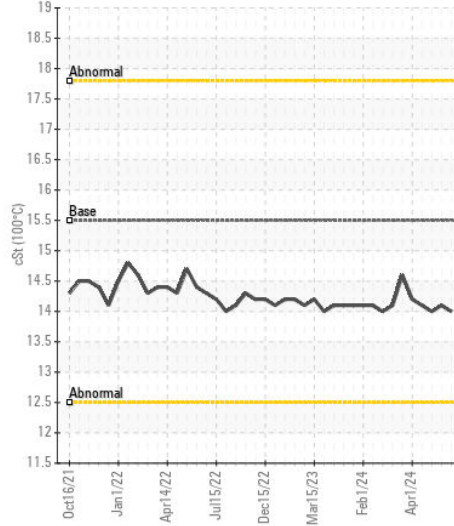

**Base Number**

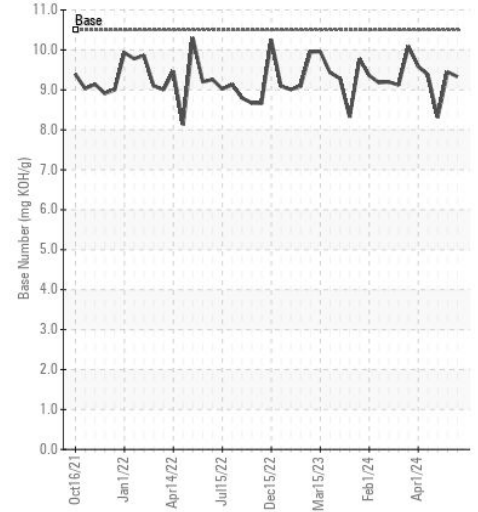

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0055621

**Lab Number** : 06218889

**Unique Number** : 11097086

**Test Package** : MAR 2

**Received** : 24 Jun 2024

**Tested** : 25 Jun 2024

**Diagnosed** : 25 Jun 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JUSTIN WHEELER

justin.wheeler@ingrambarga.com

T:

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)