



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JOE B WYATT
Machine Id
[**JOE B WYATT**] 001 647464-1
Component
Port Main Engine
Fluid
CHEVRON DELO 710 LS (345 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064536	MW0035649	MW0064484
Sample Date		Client Info		01 Jun 2024	01 May 2024	01 Apr 2024
Machine Age	hrs	Client Info		5007	4544	3802
Oil Age	hrs	Client Info		5007	4544	3802
Filter Age	hrs	Client Info		204	0	154
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	13	18	9
Chromium	ppm	ASTM D5185m	>8	2	2	1
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>15	3	3	2
Lead	ppm	ASTM D5185m	>18	6	7	6
Copper	ppm	ASTM D5185m	>80	13	13	9
Tin	ppm	ASTM D5185m	>14	6	7	6
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	6	3
Potassium	ppm	ASTM D5185m	>20	3	2	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.7	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.3	16.5	16.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	0	<1	1
Boron	ppm	ASTM D5185m		41	45	38
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		47	49	43
Manganese	ppm	ASTM D5185m		2	2	1
Magnesium	ppm	ASTM D5185m		10	16	12
Calcium	ppm	ASTM D5185m		3456	3561	3371
Phosphorus	ppm	ASTM D5185m		19	18	0
Zinc	ppm	ASTM D5185m		5	10	0
Sulfur	ppm	ASTM D5185m		2411	2597	2046
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.2	9.5	9.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.17	8.86	7.71
Visc @ 100°C	cSt	ASTM D445	15.5	14.5	14.5	14.6


FT-IR (Direct Trend)

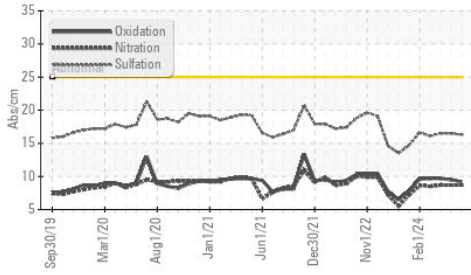


Ferrous Alloys

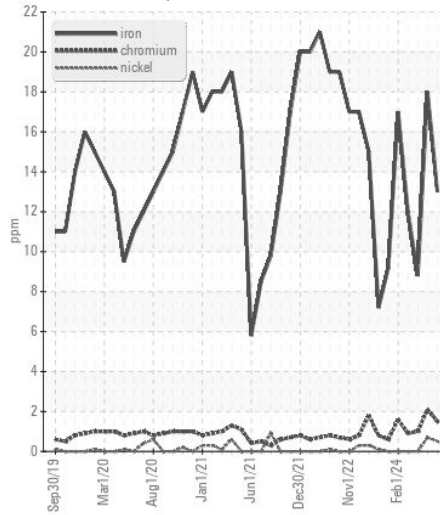


Base Number

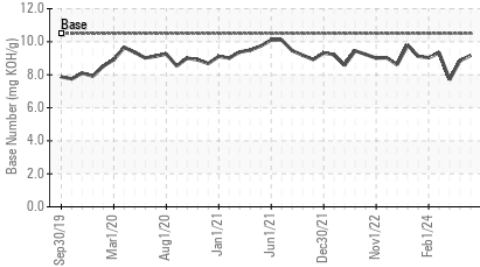


Non-ferrous Metals

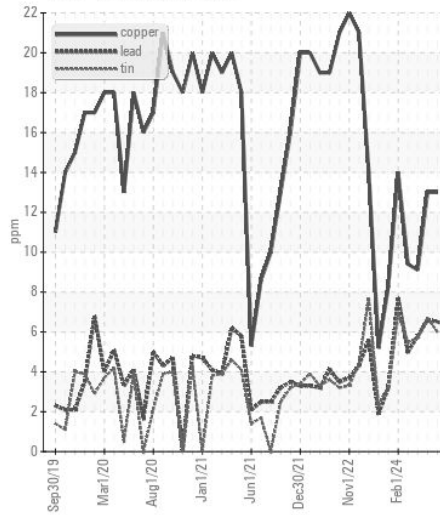


Viscosity @ 100°C

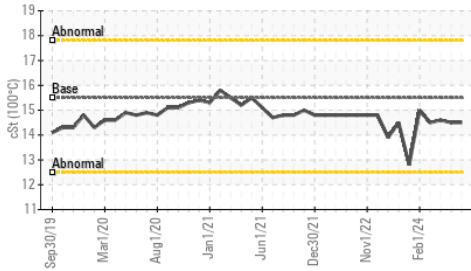

Viscosity @ 100°C

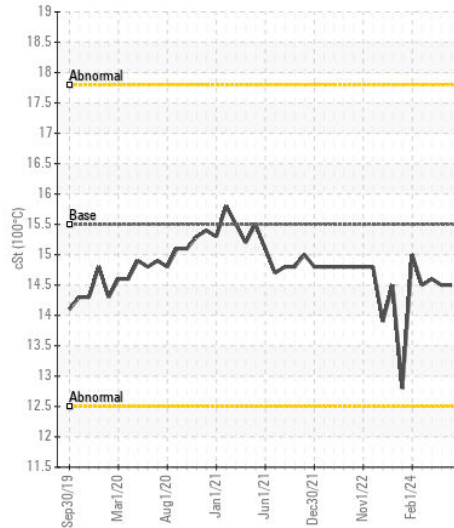

Base Number

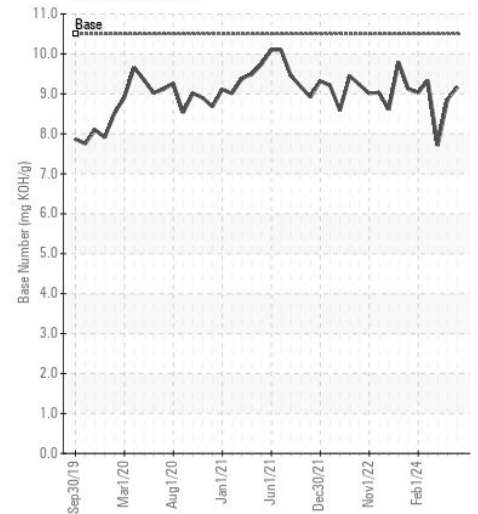

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0064536
Lab Number : 06218904
Unique Number : 11097101
Test Package : MAR 2
Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: ALLEN WILLHELM
 allen.willhelm@ingrambarga.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)