



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 4 - KENWORTH

Component
Diesel Engine

Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06218919	TR06108228	TR06057472
Sample Date		Client Info		20 Jun 2024	24 Feb 2024	06 Jan 2024
Machine Age	mls	Client Info		100673	79700	69845
Oil Age	mls	Client Info		10168	40185	30330
Filter Age	mls	Client Info		10168	40185	30330
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	19	55	50
Chromium	ppm	ASTM D5185m	>20	1	4	3
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	6	16	14
Lead	ppm	ASTM D5185m	>40	3	10	3
Copper	ppm	ASTM D5185m	>330	2	5	6
Tin	ppm	ASTM D5185m	>15	1	3	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	10	11
Potassium	ppm	ASTM D5185m	>20	14	52	51
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.5	0.9	0.7
Nitration	Abs/cm	*ASTM D7624	>20	10.6	15.4	14.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	29.8	27.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	4	0
Boron	ppm	ASTM D5185m		1	3	4
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		120	27	19
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		43	130	140
Calcium	ppm	ASTM D5185m		4355	3796	4017
Phosphorus	ppm	ASTM D5185m		1045	945	896
Zinc	ppm	ASTM D5185m		1092	1079	1058
Sulfur	ppm	ASTM D5185m		4576	4008	4011
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.8	19.7	17.2
Base Number (BN)	mg KOH/g	ASTM D2896		13.51	9.95	10.26
Visc @ 100°C	cSt	ASTM D445		15.0	14.9	15.1

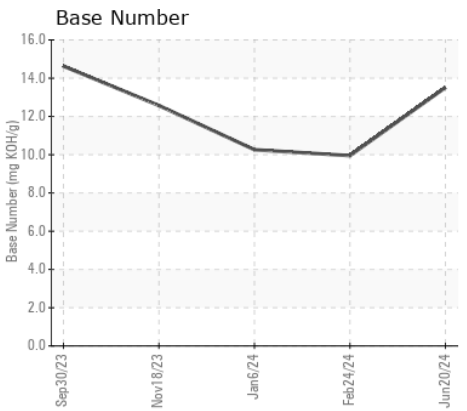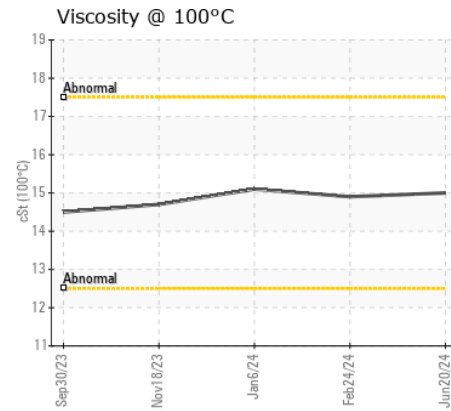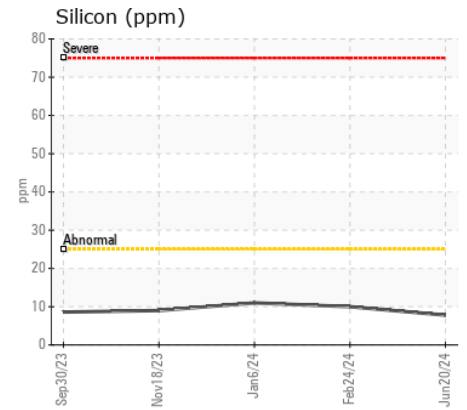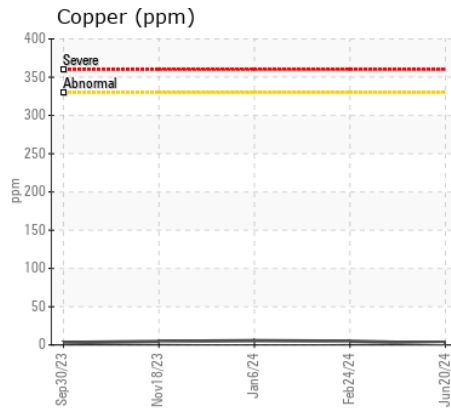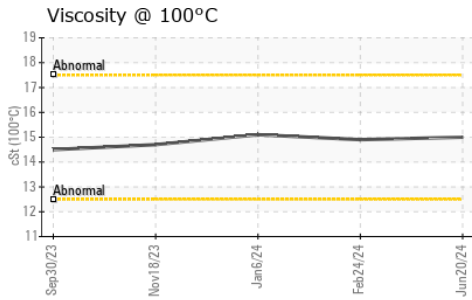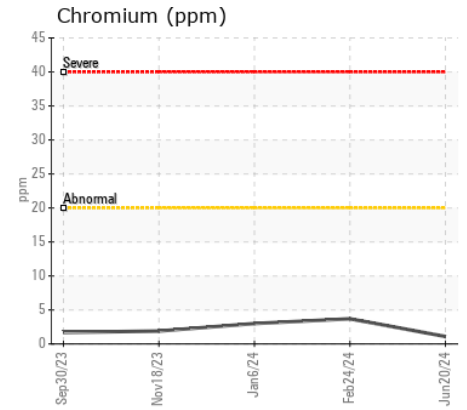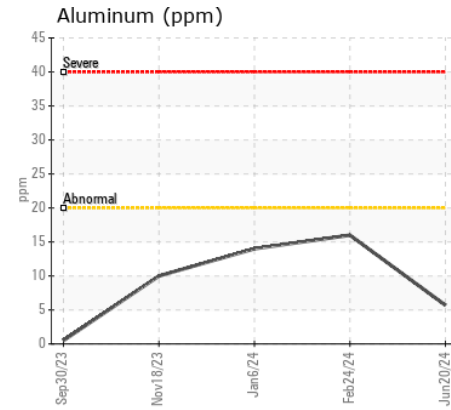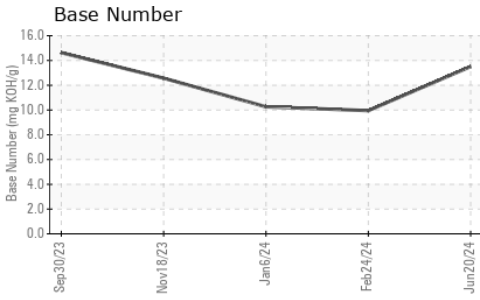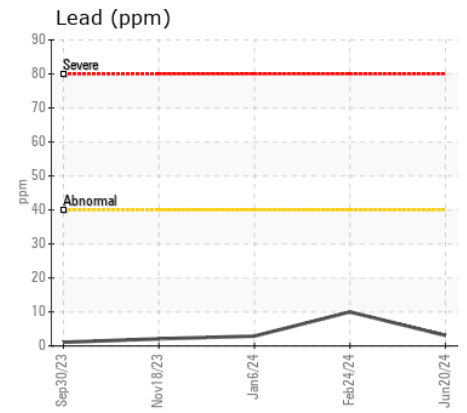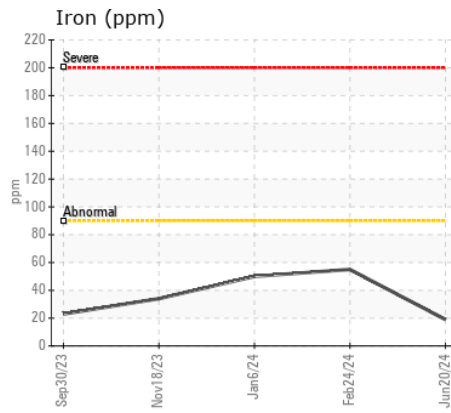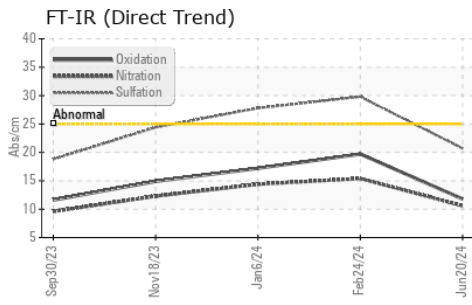

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06218919
Lab Number : 06218919
Unique Number : 11097116
Test Package : MOB 2

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

VAUGHN TRUCKING
 90911 LEWIS AND CLARK RD
 ASTORIA, OR
 US 97103
 Contact: JEFF WARREN

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: