

Machine Id VOLVO EC380E 315908 Component Left Travel Fluid

VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

,	,						
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor.	Sample Number		Client Info		ML0002775		
	Sample Date		Client Info		14 Jun 2024		
	Machine Age	hrs	Client Info		526		
	Oil Age	hrs	Client Info		526		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		Changed		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
WEAR	Iron	ppm	ASTM D5185m	>1200	108		
All component wear rates are normal.	Chromium	ppm	ASTM D5185m	>20	1		
	Nickel	ppm	ASTM D5185m	>5	<1		
	Titanium	ppm	ASTM D5185m		0		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m	>100	1		
	Lead	ppm	ASTM D5185m	>50	0		
	Copper	ppm	ASTM D5185m	>50	<1		
	Tin	ppm	ASTM D5185m	>5	0		
	Vanadium	ppm	ASTM D5185m		0		
	White Metal	scalar	*Visual	NONE	MODER		
	Yellow Metal	scalar	*Visual	NONE	NONE		
CONTAMINATION	Silicon	ppm	ASTM D5185m	>100	8		
There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m	>20	2		
	Water		WC Method	>0.25	NEG		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.25	NEG		
FLUID CONDITION	Sodium	ppm	ASTM D5185m		2		
The condition of the oil is acceptable for the time in service.	Boron	ppm	ASTM D5185m		0		
	Barium	ppm	ASTM D5185m		3		
	Molybdenum	ppm	ASTM D5185m		0		
	Manganese	ppm	ASTM D5185m		3		
	Magnesium	ppm	ASTM D5185m		<1		
	Calcium	ppm	ASTM D5185m		12		
	Phosphorus	ppm	ASTM D5185m		332		

Zinc

Sulfur

ASTM D5185m

ASTM D5185m


ppm

ppm

Submitted By: Service - Alex Anderson

6

19031

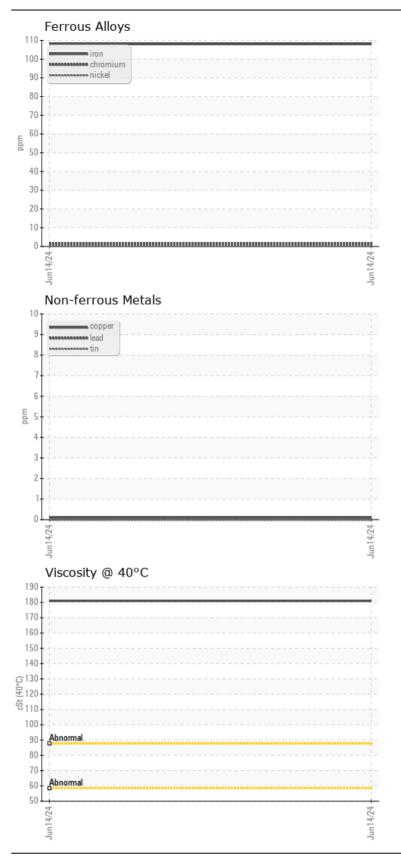



Submitted By: Service - Alex Anderson Page 2 of 2