



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CR5503 - OUTER
Component
Front Right Planetary
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of metal. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0952095	WC0877342	---
Sample Date		Client Info		14 Jun 2024	19 Jan 2024	---
Machine Age	hrs	Client Info		10882	10142	---
Oil Age	hrs	Client Info		740	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

High concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	26	13	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>25	15	4	---
Copper	ppm	ASTM D5185m	>75	75	32	---
Tin	ppm	ASTM D5185m	>10	0	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	▲ HEAVY	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	2	1	---
Potassium	ppm	ASTM D5185m	>20	1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m	50	11	9	---
Barium	ppm	ASTM D5185m	15	0	0	---
Molybdenum	ppm	ASTM D5185m	15	0	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	50	0	0	---
Calcium	ppm	ASTM D5185m	50	11	0	---
Phosphorus	ppm	ASTM D5185m	350	275	335	---
Zinc	ppm	ASTM D5185m	100	507	43	---
Sulfur	ppm	ASTM D5185m	12500	7581	5367	---


Ferrous Alloys

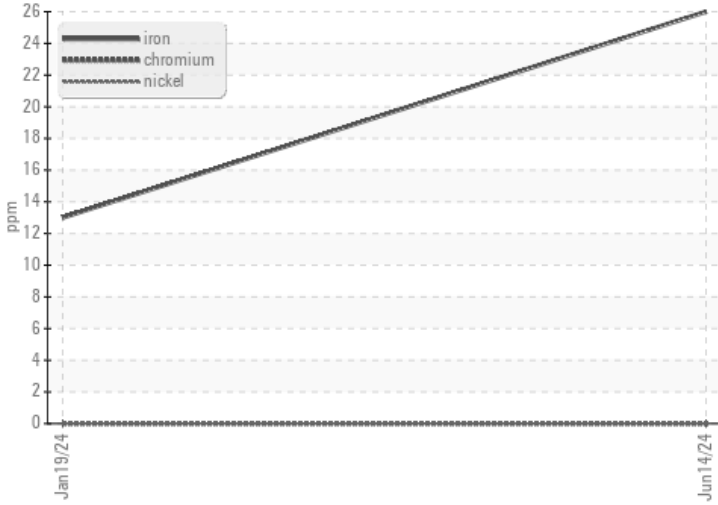

Non-ferrous Metals

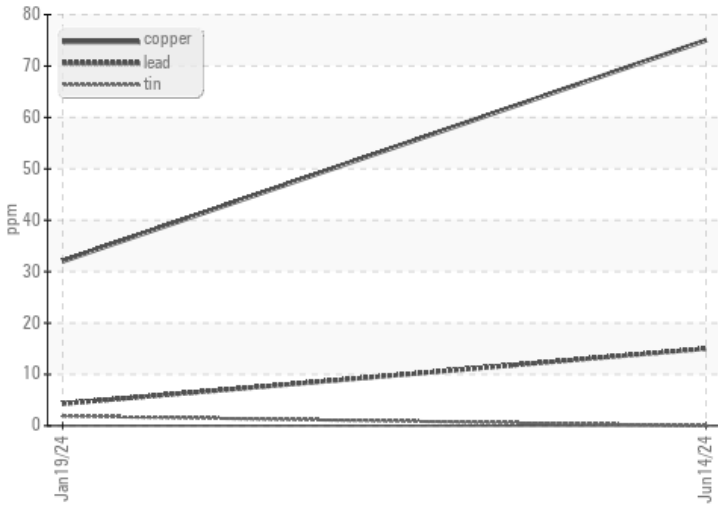

Viscosity @ 40°C

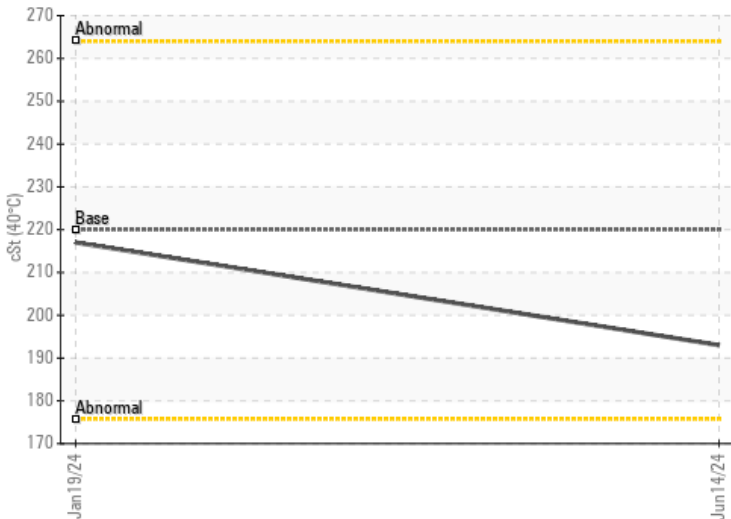

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0952095
Lab Number : 06218959
Unique Number : 11097156
Test Package : CONST

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 26 Jun 2024 - Don Baldrige

BUCKNER HEAVY LIFT
 4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215

Contact: MICHAEL LAWSON
 michael@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)376-8888
 F: (336)376-4090