



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50 1216-123739
Component
Splitter Box
Fluid
MOBIL 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0211712	LH0211684	LH0211656
Sample Date		Client Info		17 Jun 2024	31 Jan 2024	09 Aug 2023
Machine Age	hrs	Client Info		12322	10743	8617
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	Not Changd	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	9	10	9
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>5	<1	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	<1
Copper	ppm	ASTM D5185m	>10	6	<1	<1
Tin	ppm	ASTM D5185m	>2	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>10	2	1	2
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	1	1	0
Boron	ppm	ASTM D5185m		273	325	321
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		<1	2	1
Calcium	ppm	ASTM D5185m		60	93	43
Phosphorus	ppm	ASTM D5185m		2169	1944	2030
Zinc	ppm	ASTM D5185m		58	59	35
Sulfur	ppm	ASTM D5185m		26602	19104	22741

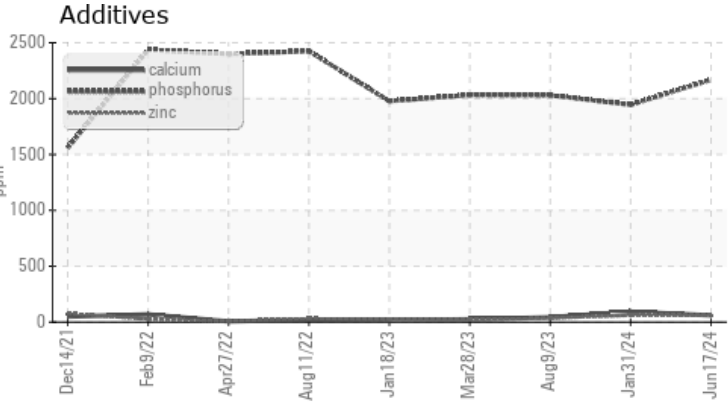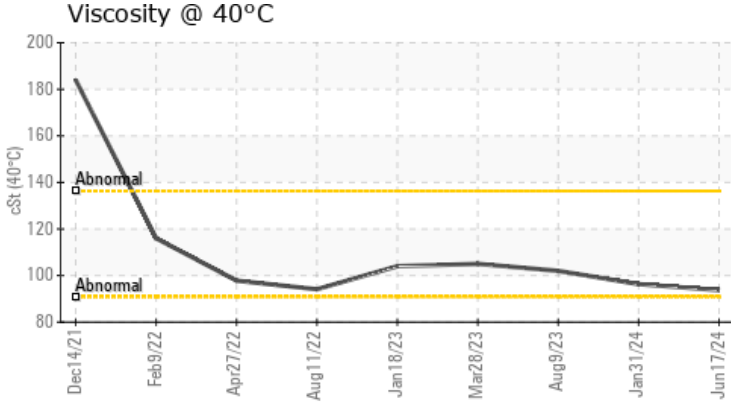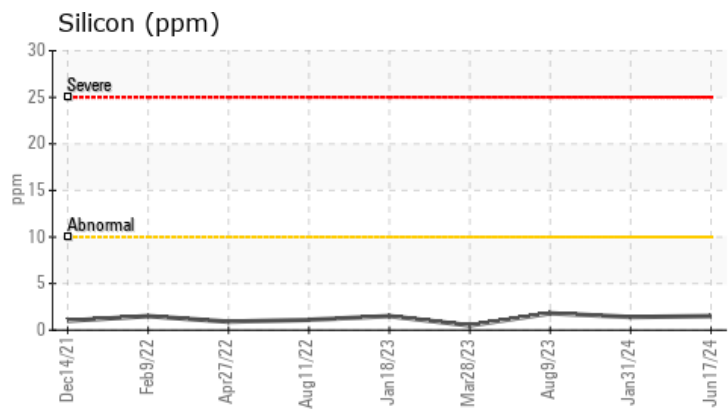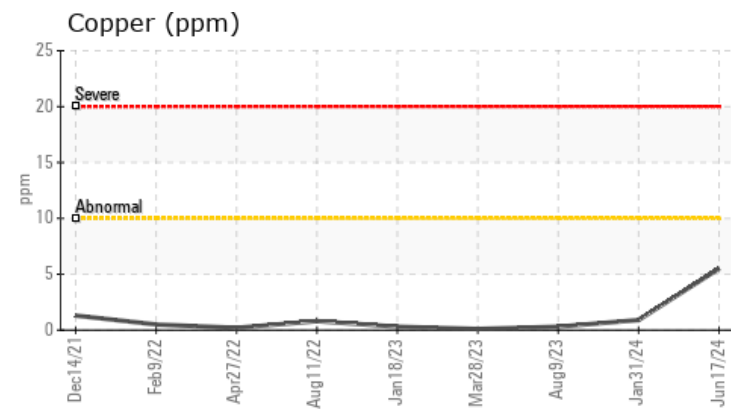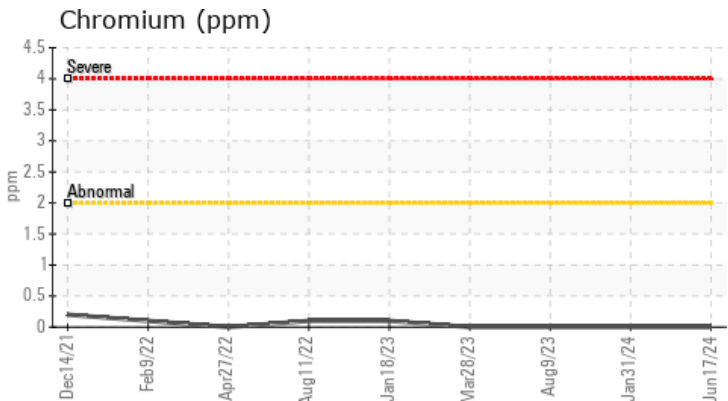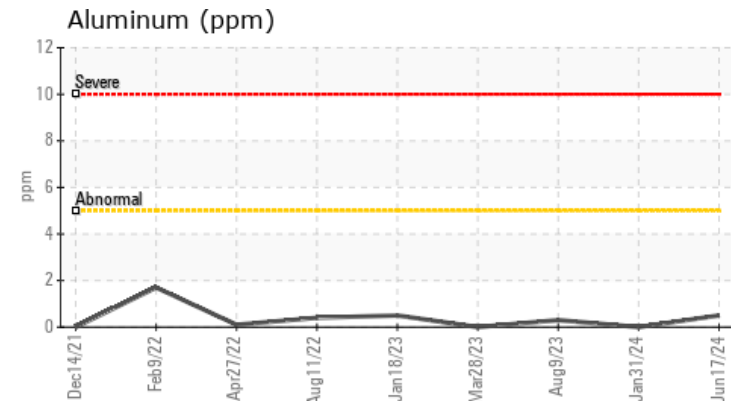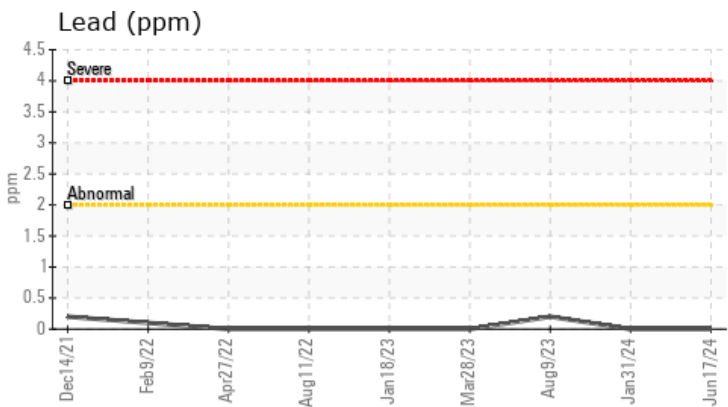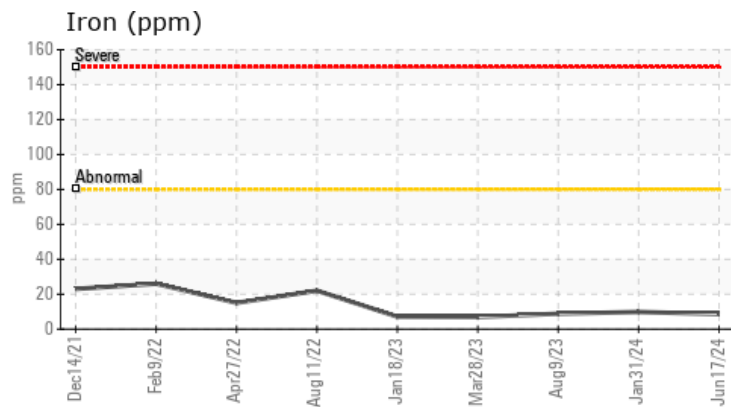

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0211712
Lab Number : 06218969
Unique Number : 11097166
Test Package : MOBCE

AHLSTROM-MUNKSJO NA SPECIALTY
 PO BOX 600
 KAUKAUNA, WI
 US 54130
 Contact: JOE SEITZ
 joe.seitz@ahlstrom-munksjo.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)