



LIEBHERR

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50 1216-123739
Component
Rear Right Wheel Hub
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0211718	LH0211690	LH0211662
Sample Date		Client Info		17 Jun 2024	31 Jan 2024	09 Aug 2023
Machine Age	hrs	Client Info		12322	10743	8617
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

The copper level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>325	65	39	198
Chromium	ppm	ASTM D5185m	>3	<1	0	2
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	<1	6
Lead	ppm	ASTM D5185m	>4	0	0	2
Copper	ppm	ASTM D5185m	>75	▲ 88	52	▲ 179
Tin	ppm	ASTM D5185m	>3	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	6	24
Potassium	ppm	ASTM D5185m	>20	1	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	3	6
Boron	ppm	ASTM D5185m	400	243	307	5
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	0	0	2
Manganese	ppm	ASTM D5185m		4	2	8
Magnesium	ppm	ASTM D5185m	12	<1	<1	3
Calcium	ppm	ASTM D5185m	150	39	33	229
Phosphorus	ppm	ASTM D5185m	1650	2372	2136	2067
Zinc	ppm	ASTM D5185m	125	82	48	137
Sulfur	ppm	ASTM D5185m	22500	30611	22175	25592

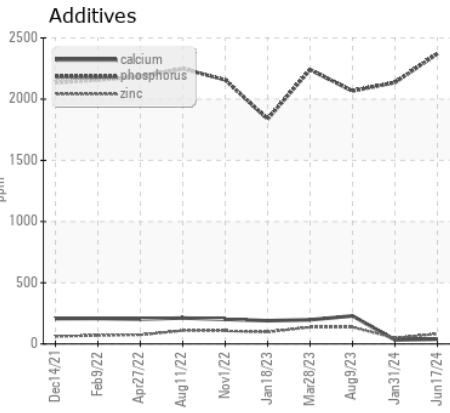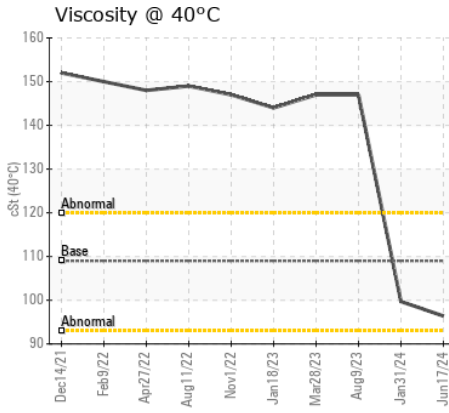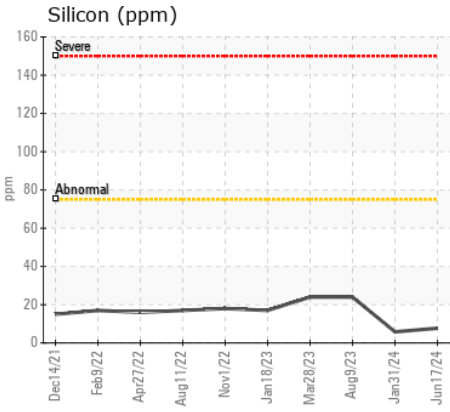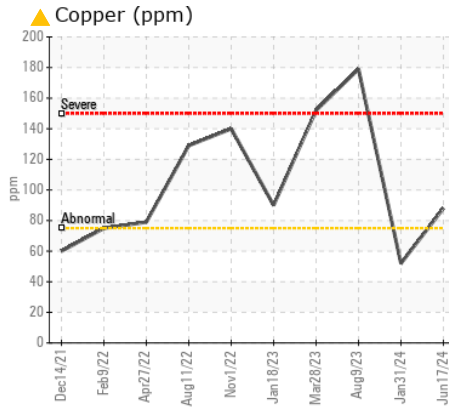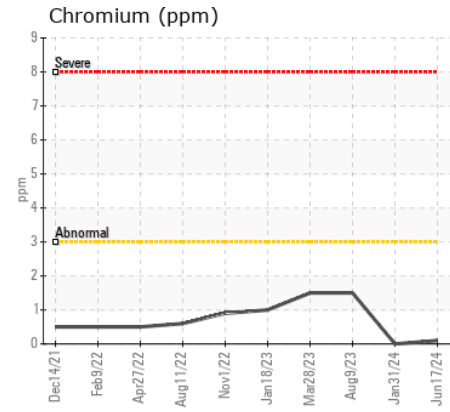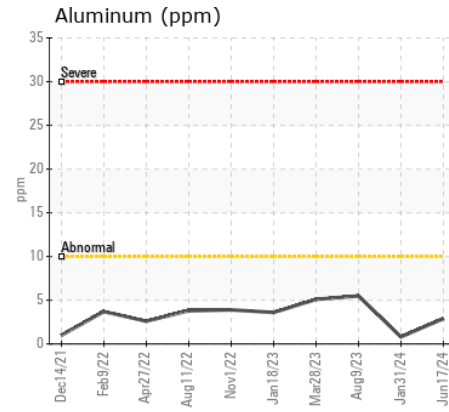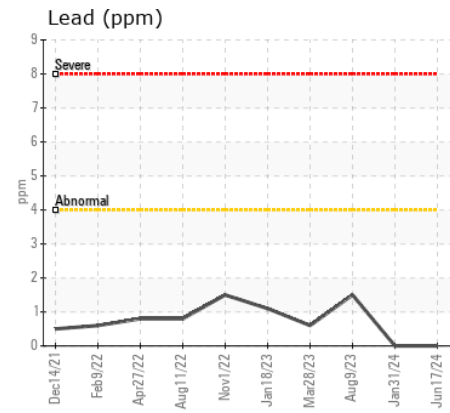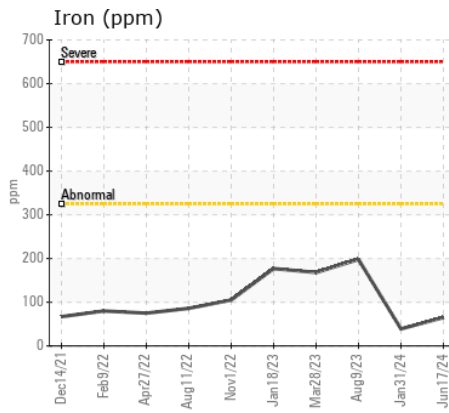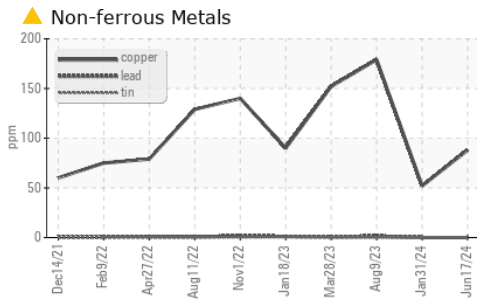

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0211718
Lab Number : 06218971
Unique Number : 11097168
Test Package : MOBCE

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 26 Jun 2024 - Don Baldrige

AHLSTROM-MUNKSJO NA SPECIALTY
 PO BOX 600
 KAUKAUNA, WI
 US 54130
 Contact: JOE SEITZ
 joe.seitz@ahlstrom-munksjo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: