



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 352505
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP397502	VCP400533	VCP382753
Sample Date		Client Info		14 May 2024	11 Mar 2024	21 Nov 2023
Machine Age	hrs	Client Info		4446	4247	3910
Oil Age	hrs	Client Info		0	0	300
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	16	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	3	1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	6	2
Lead	ppm	ASTM D5185m	>40	2	2	0
Copper	ppm	ASTM D5185m	>330	<1	2	0
Tin	ppm	ASTM D5185m	>15	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	7	4
Potassium	ppm	ASTM D5185m	>20	5	3	2
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	7.7	9.0	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	19.9	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	2
Boron	ppm	ASTM D5185m	0	95	95	58
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	0	54	16	13
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	698	865	625
Calcium	ppm	ASTM D5185m		1519	1900	1370
Phosphorus	ppm	ASTM D5185m		801	991	763
Zinc	ppm	ASTM D5185m		938	1113	854
Sulfur	ppm	ASTM D5185m		3819	3734	2842
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.6	14.5	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.1	8.1	8.6
Visc @ 100°C	cSt	ASTM D445	14	13.0	13.2	13.2

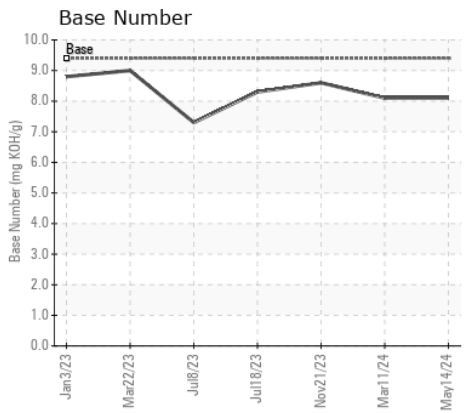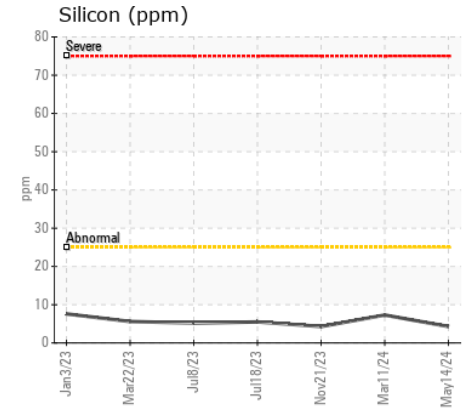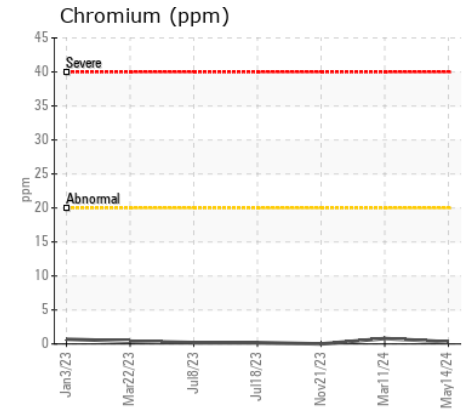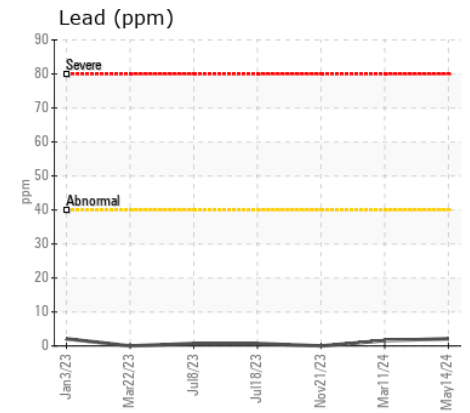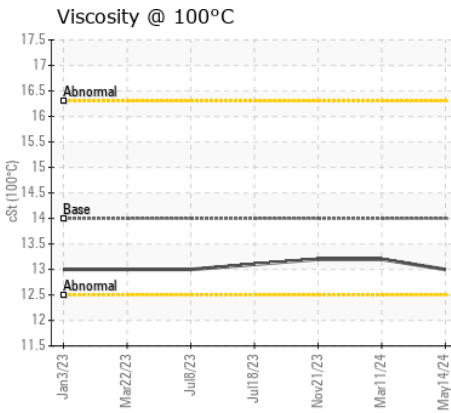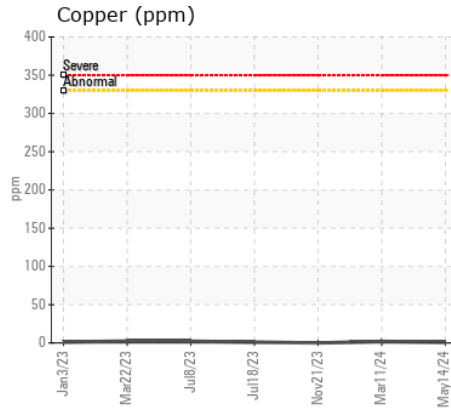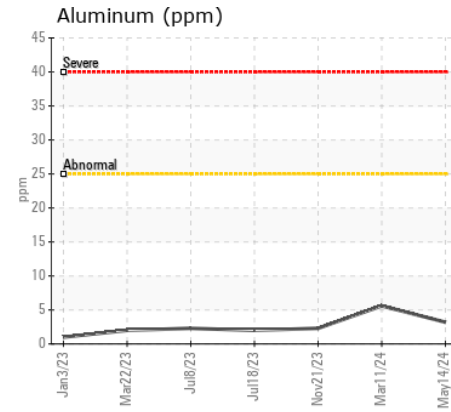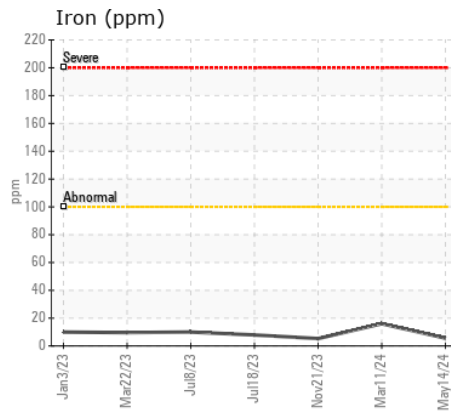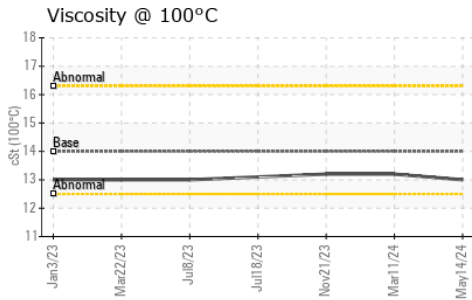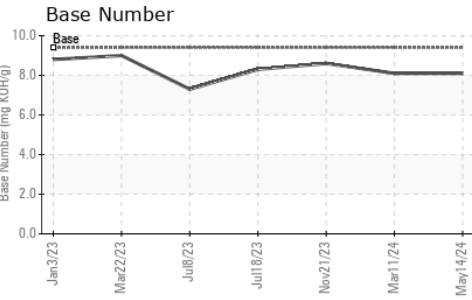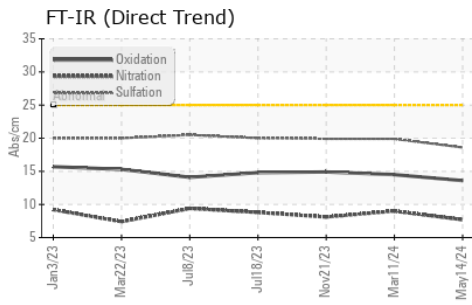

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP397502 **Received** : 24 Jun 2024
Lab Number : 06219045 **Tested** : 25 Jun 2024
Unique Number : 11097242 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

DUNN CONSTRUCTION INC
 318 N 14TH ST
 BELLEVUE, IA
 US 52031
 Contact: STEVE DUNN
 DUNNCONSTRUCTINC@GMAIL.COM
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)