



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 1216-108671
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 5W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0268419	LH0258879	LH0258754
Sample Date		Client Info		14 Jun 2024	05 Apr 2024	23 Feb 2024
Machine Age	hrs	Client Info		21235	20592	20036
Oil Age	hrs	Client Info		0	500	0
Filter Age	hrs	Client Info		0	500	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	3	4
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		85	89	85
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>15	1	<1	1
Lead	ppm	ASTM D5185m	>30	0	<1	0
Copper	ppm	ASTM D5185m	>125	8	2	1
Tin	ppm	ASTM D5185m	>5	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>60	8	9	7
Potassium	ppm	ASTM D5185m	>20	3	4	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	20.0	19.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	3	4	2
Boron	ppm	ASTM D5185m	250	57	136	126
Barium	ppm	ASTM D5185m	10	<1	0	0
Molybdenum	ppm	ASTM D5185m	100	4	5	6
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	722	731	664
Calcium	ppm	ASTM D5185m	3000	1397	1334	1392
Phosphorus	ppm	ASTM D5185m	1150	978	1071	934
Zinc	ppm	ASTM D5185m	1350	1222	1200	1131
Sulfur	ppm	ASTM D5185m	4250	4100	4228	3472
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	14.9	13.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	7.3	7.4
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.1	13.1


FT-IR (Direct Trend)

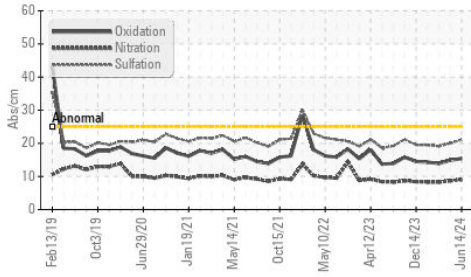


Base Number

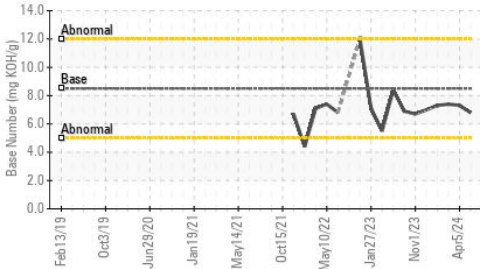


Viscosity @ 100°C

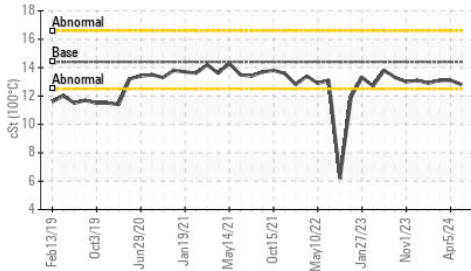


Ferrous Alloys

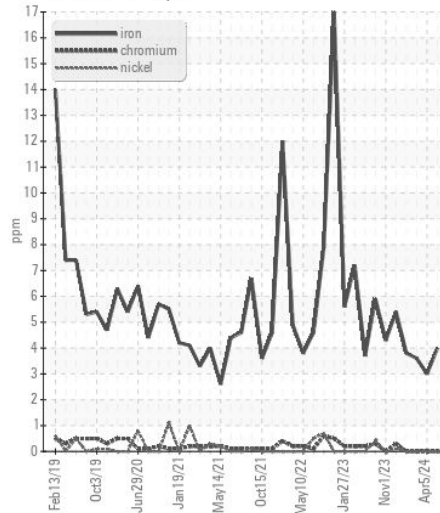


Non-ferrous Metals

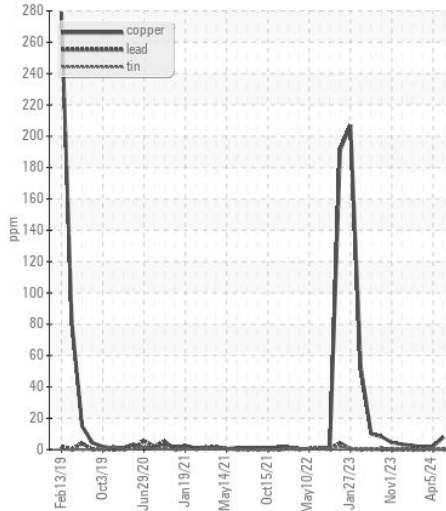

Viscosity @ 100°C

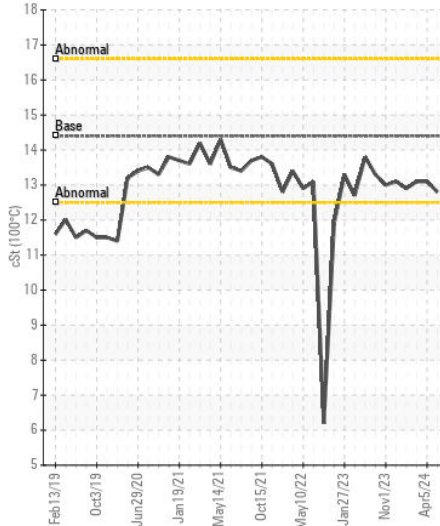

Base Number

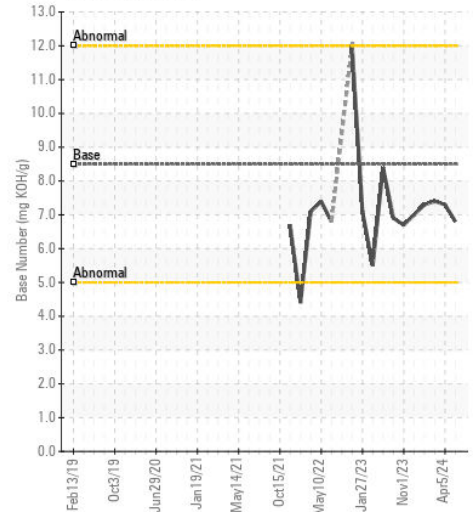

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LH0268419

Lab Number : 06219076

Unique Number : 11097273

Test Package : CONST (Additional Tests: TBN)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Wes Davis

AMERICAN STATE EQUIPMENT CO.

2400 NORTH 14TH AVENUE

WAUSAU, WI

US 54401

Contact: CHRIS BARTNIK

cbartnik@amstate.com

T: (715)675-6900

F: (715)675-9748

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)