



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**EMD KELLY LEE**  
Component  
**Port Main Engine**  
Fluid  
**CHEVRON DELO 710 LE (285 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>MW0067052</b>   | MW0066972   | MW0066966   |
| Sample Date    |     | Client Info |           | <b>28 May 2024</b> | 09 May 2024 | 11 Apr 2024 |
| Machine Age    | hrs | Client Info |           | <b>18095</b>       | 17635       | 17174       |
| Oil Age        | hrs | Client Info |           | <b>500</b>         | 500         | 0           |
| Filter Age     | hrs | Client Info |           | <b>500</b>         | 500         | 0           |
| Oil Changed    |     | Client Info |           | <b>Not Chngd</b>   | Not Chngd   | Changed     |
| Filter Changed |     | Client Info |           | <b>Not Chngd</b>   | Not Chngd   | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | SEVERE      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >75  | <b>6</b>     | 6    | 41   |
| Chromium     | ppm    | ASTM D5185m | >8   | <b>&lt;1</b> | <1   | 5    |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | <1   | <1   |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | <1   | 0    |
| Aluminum     | ppm    | ASTM D5185m | >15  | <b>1</b>     | 2    | 2    |
| Lead         | ppm    | ASTM D5185m | >18  | <b>&lt;1</b> | 1    | 1    |
| Copper       | ppm    | ASTM D5185m | >80  | <b>6</b>     | 6    | 2    |
| Tin          | ppm    | ASTM D5185m | >14  | <b>1</b>     | 2    | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**

There is no indication of any contamination in the oil.


|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >20   | <b>2</b>       | 3     | 14    |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>0</b>       | 2     | 8     |
| Fuel             |          | WC Method   | >4.0  | <b>&lt;1.0</b> | 0.4   | ▲ 6.6 |
| Water            |          | WC Method   | >0.1  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.9</b>     | 0.3   | ▲ 5.1 |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>6.4</b>     | 8.4   | 13.9  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>15.1</b>    | 21.3  | 33.3  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.1  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |        |
|------------------|----------|-------------|------|--------------|------|--------|
| Sodium           | ppm      | ASTM D5185m | >75  | <b>&lt;1</b> | <1   | 2      |
| Boron            | ppm      | ASTM D5185m |      | <b>42</b>    | 44   | 99     |
| Barium           | ppm      | ASTM D5185m |      | <b>0</b>     | 0    | 0      |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>43</b>    | 43   | 4      |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | 0    | <1     |
| Magnesium        | ppm      | ASTM D5185m |      | <b>23</b>    | 11   | 63     |
| Calcium          | ppm      | ASTM D5185m |      | <b>3249</b>  | 3212 | 2227   |
| Phosphorus       | ppm      | ASTM D5185m |      | <b>23</b>    | 15   | 1031   |
| Zinc             | ppm      | ASTM D5185m | 10   | <b>27</b>    | 4    | 1189   |
| Sulfur           | ppm      | ASTM D5185m |      | <b>2436</b>  | 2312 | 3486   |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>6.4</b>   | 20.2 | 25.6   |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.2  | <b>6.5</b>   | 8.1  | ▲ 0.0  |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.5 | <b>14.6</b>  | 14.6 | ▲ 15.8 |


**FT-IR (Direct Trend)**

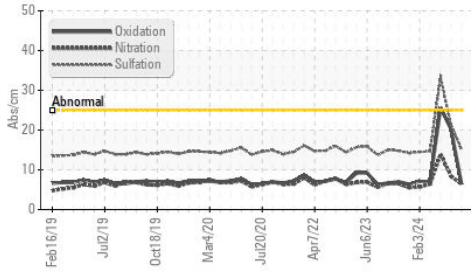


**Base Number**

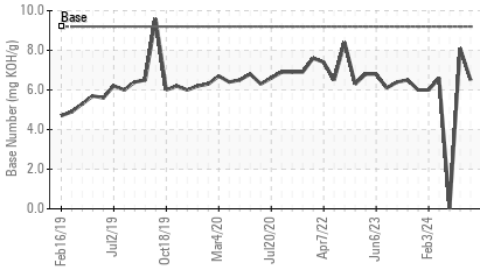


**Viscosity @ 100°C**

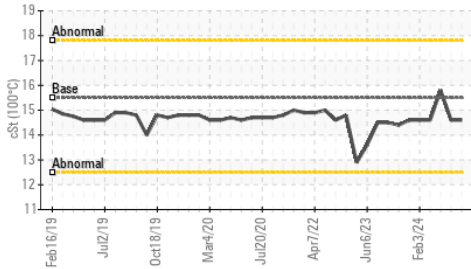


**Ferrous Alloys**

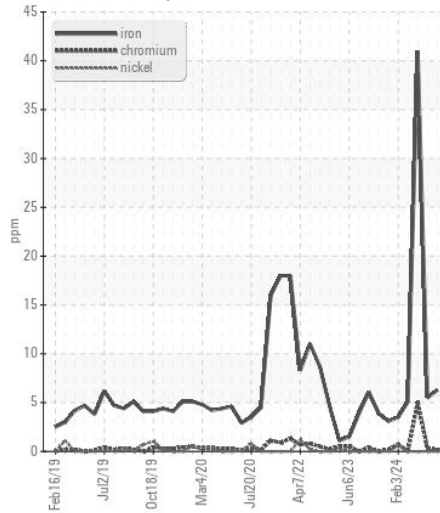


**Non-ferrous Metals**

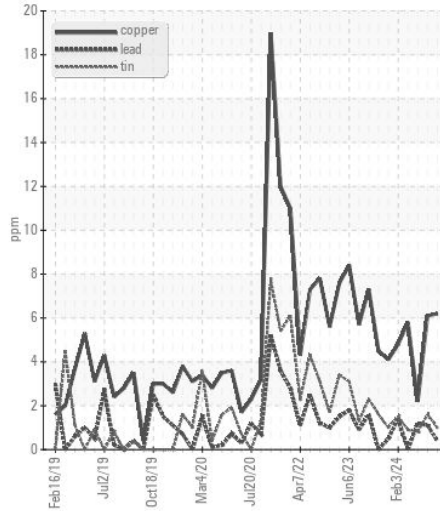

**Viscosity @ 100°C**

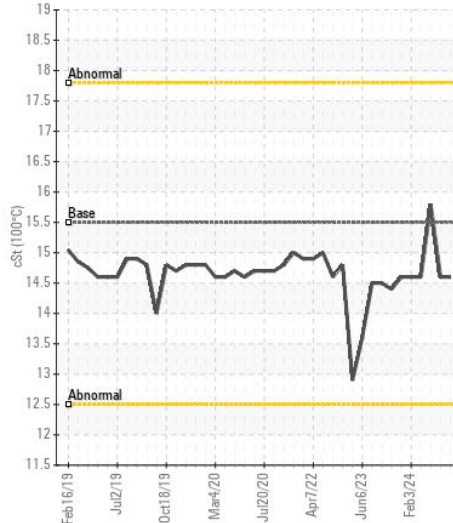

**Base Number**

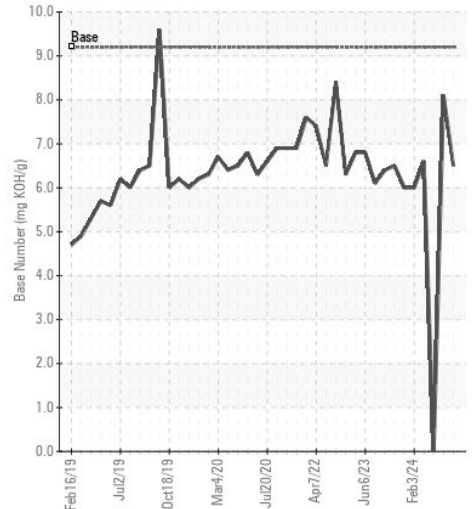

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0067052  
**Lab Number** : 06219087  
**Unique Number** : 11097284  
**Test Package** : MAR 2

**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**MAGNOLIA MARINE TRANSPORT**  
 697 HAINING ROAD  
 VICKSBURG, MS  
 US 39183  
 Contact: MMT MAINTENANCE PLANNERS  
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: (601)638-8028