



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
LARRY DRUMMOND
Machine Id
[LARRY DRUMMOND] 008 518412-8
Component
Starboard Genset
Fluid
CHEVRON DELO 400 LE 15W40 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064369	MW0068772	MW0058647
Sample Date		Client Info		01 Jun 2024	02 Apr 2024	28 Jan 2024
Machine Age	hrs	Client Info		35323	35254	34772
Oil Age	hrs	Client Info		400	400	320
Filter Age	hrs	Client Info		400	400	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	3	3	4
Chromium	ppm	ASTM D5185m	>4	0	0	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		4	5	4
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>12	2	3	3
Lead	ppm	ASTM D5185m	>17	0	0	0
Copper	ppm	ASTM D5185m	>70	<1	0	0
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	4	6
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.1	6.7	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.1	22.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	<1
Boron	ppm	ASTM D5185m		285	287	296
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		105	93	108
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m		689	665	691
Calcium	ppm	ASTM D5185m		1703	1594	1488
Phosphorus	ppm	ASTM D5185m	1200	786	743	720
Zinc	ppm	ASTM D5185m	1300	940	904	855
Sulfur	ppm	ASTM D5185m	3200	3351	3365	2579
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	15.2	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	9.0	8.9	8.8
Visc @ 100°C	cSt	ASTM D445	15.7	13.4	13.2	13.3


FT-IR (Direct Trend)

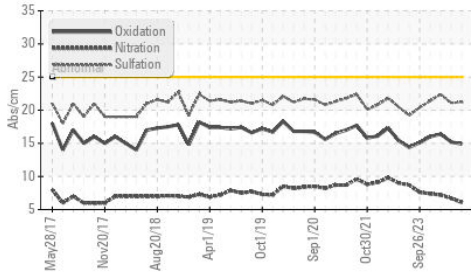


Base Number

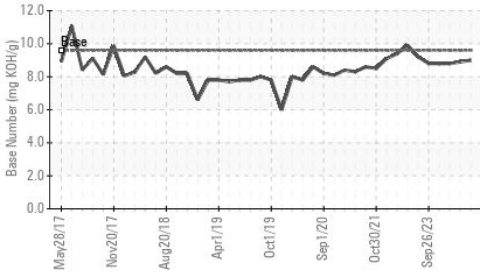


Viscosity @ 100°C

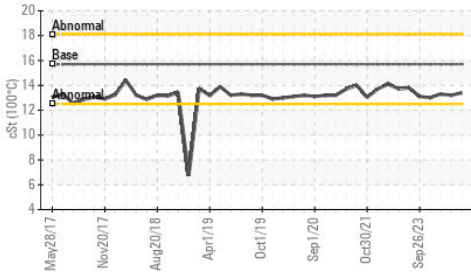


Acid Number

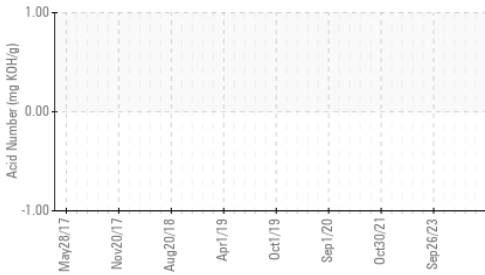


Ferrous Alloys

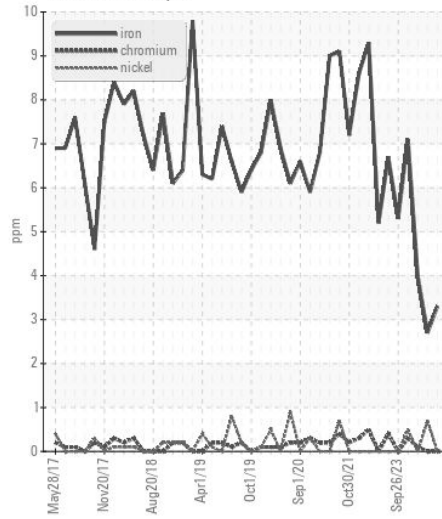


Non-ferrous Metals

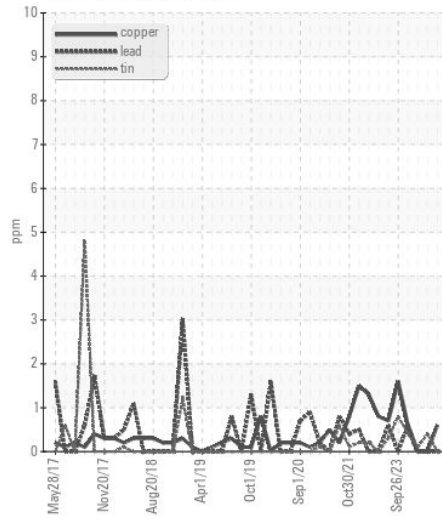

Viscosity @ 100°C

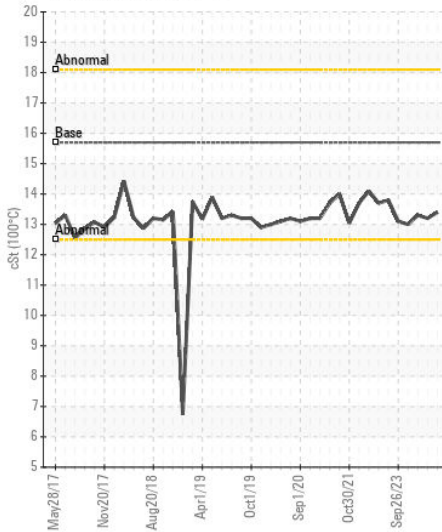

Acid Number

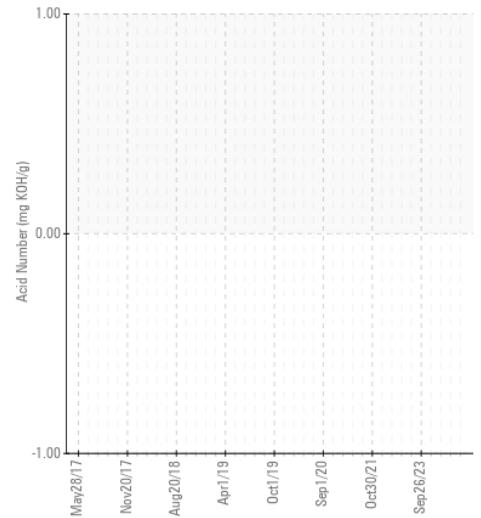

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0064369 **Received** : 24 Jun 2024
Lab Number : 06219122 **Tested** : 26 Jun 2024
Unique Number : 11097319 **Diagnosed** : 26 Jun 2024 - Jonathan Hester
Test Package : MAR 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

INGRAM BARGE

900 S 3RD ST
 PADUCAH, KY
 US 42003

Contact: JEFF BISHOP
 jeff.bishop@ingrambarga.com

T:
 F: (615)695-3697