



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1204**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0946472</b>	WC0897845	WC0893959
Sample Date		Client Info		<b>07 Jun 2024</b>	30 Apr 2024	25 Mar 2024
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>24</b>	21	10
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	4	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>21</b>	▲ 27	6
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	5	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.5	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	11.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.2</b>	24.5	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>4</b>	<1	2
Boron	ppm	ASTM D5185m	250	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	10	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	100	<b>61</b>	62	63
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>1023</b>	909	1042
Calcium	ppm	ASTM D5185m	3000	<b>1237</b>	1128	1158
Phosphorus	ppm	ASTM D5185m	1150	<b>1077</b>	1075	1122
Zinc	ppm	ASTM D5185m	1350	<b>1375</b>	1237	1372
Sulfur	ppm	ASTM D5185m	4250	<b>3606</b>	3171	3732
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.5</b>	26.2	22.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.5</b>	6.3	6.3
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.6</b>	14.3	14.2

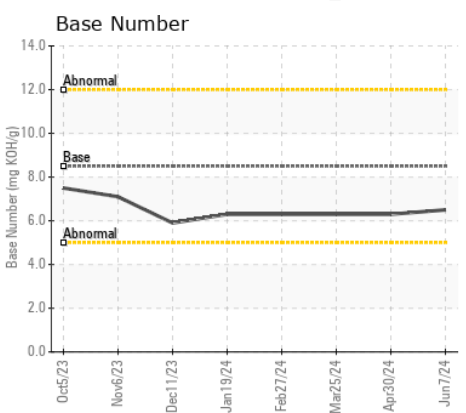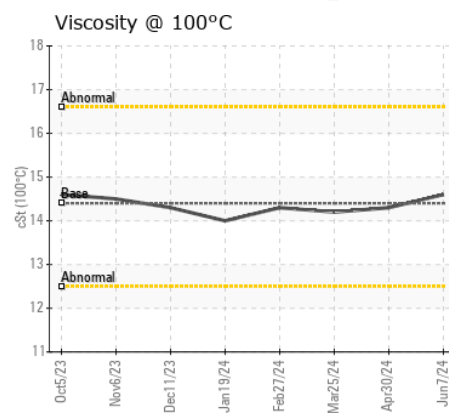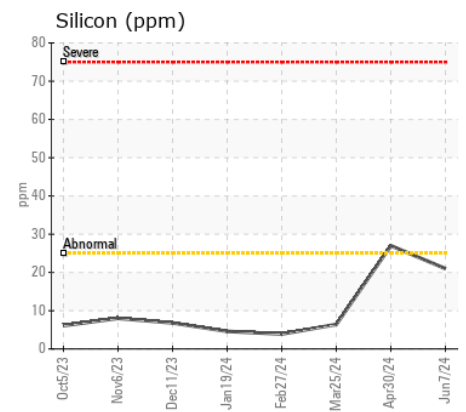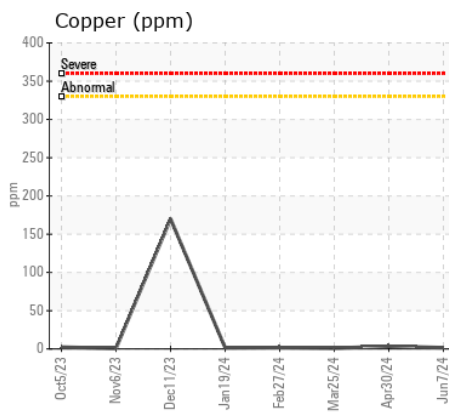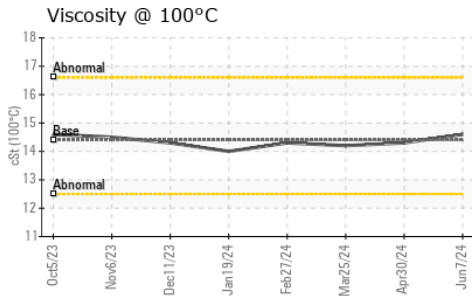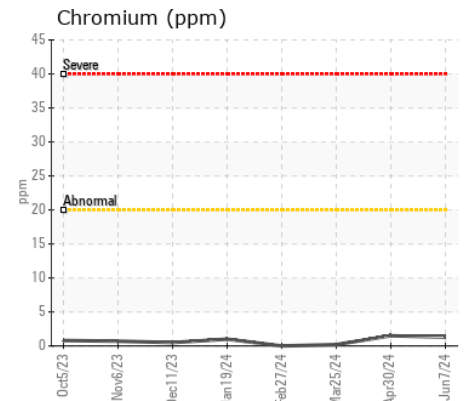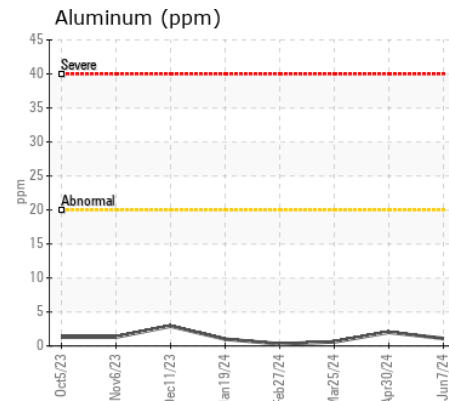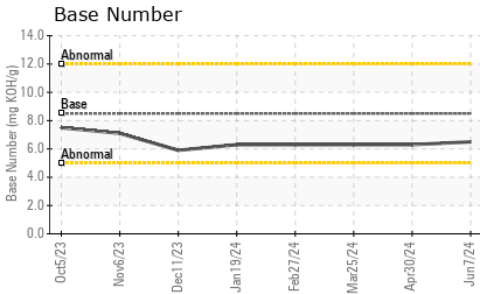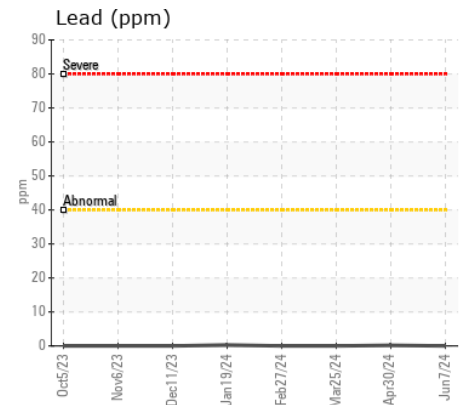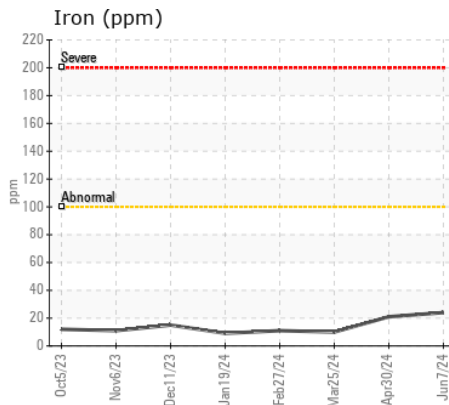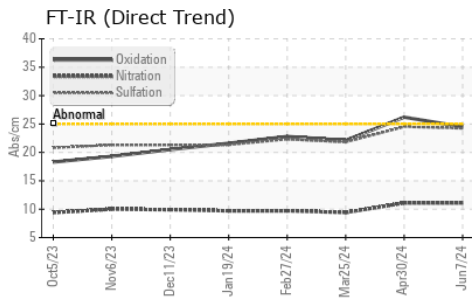

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0946472  
**Lab Number** : 06219130  
**Unique Number** : 11097327  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**GO DURHAM - RAPT**  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701  
 Contact: Robert Iosiniecki  
 Robert.iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)