
**WEAR** CONTAMINATION **FLUID CONDITION** 

**NORMAL NORMAL NORMAL** 

Machine Id

36192 Component

Diesel Engine							
CHEVRON 15W40 ( QTS)							
	 + .					 Line i - a	
RECOMMENDATION  No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Test	UOM	Method	Limit/Abn	Current	History1	History2
	Sample Number		Client Info		WC0918508		
	Sample Date Machine Age	mlo	Client Info		06 Jun 2024 80930	29 Dec 2023 51216	
	Oil Age	mls	Client Info		29714	25613	
	Filter Age	mls	Client Info		0	0	
	Oil Changed	11110	Client Info		Changed	Changed	
	Filter Changed		Client Info		N/A	N/A	
	Sample Status				NORMAL	NORMAL	
WEAR	Iron	nnm	ASTM D5185m	> 100	27	31	
WEAN	Chromium	ppm	ASTM D5185m		1	2	
All component wear rates are normal.	Nickel	ppm	ASTM D5185m		0	<1	
	Titanium	ppm	ASTM D5185m	24	<1	<1	
	Silver	ppm	ASTM D5185m	<b>\3</b>	0	0	
	Aluminum	ppm	ASTM D5185m		21	43	
	Lead	ppm	ASTM D5185m		0	0	
	Copper	ppm	ASTM D5185m		49	152	
	Tin	ppm	ASTM D5185m		0	1	
	Vanadium	ppm	ASTM D5185m		<1	0	
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
CONT A MINIATION							
CONTAMINATION	Silicon Potassium	ppm	ASTM D5185m ASTM D5185m		6 42	6 98	
Fuel content negligible. Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.	Fuel	ppm %	ASTM D3163111		0.1	<1.0	
	Water	/6	WC Method		NEG	NEG	
	Glycol		WC Method	>0.L	NEG	NEG	
	Soot %	%	*ASTM D7844	>3	0.8	0.8	
	Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.1	
	Sulfation	Abs/.1mm	*ASTM D7415		23.3	22.2	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
FLUID CONDITION	Sodium	ppm	ASTM D5185m	<b>&gt;50</b>	2	0	
TEGID CONDITION	Boron	ppm	ASTM D5185m	/50	112	4	
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0	11	
	Molybdenum	ppm	ASTM D5185m		76	59	
	Manganese	ppm	ASTM D5185m		<1	<1	
	Magnesium	ppm	ASTM D5185m		527	819	
	Calcium	ppm	ASTM D5185m		1408	1105	
	Phosphorus	ppm	ASTM D5185m		952	962	
	Zinc	ppm	ASTM D5185m		1229	1049	
	Sulfur	ppm	ASTM D5185m		2865	2671	
	Oxidation	Abs/.1mm	*ASTM D7414	>25	17.5	17.8	
	Base Number (BN)	mg KOH/g	ASTM D2896		6.0	7.8	
	Visc @ 100°C	cSt	ASTM D445	14.4	12.1	13.1	

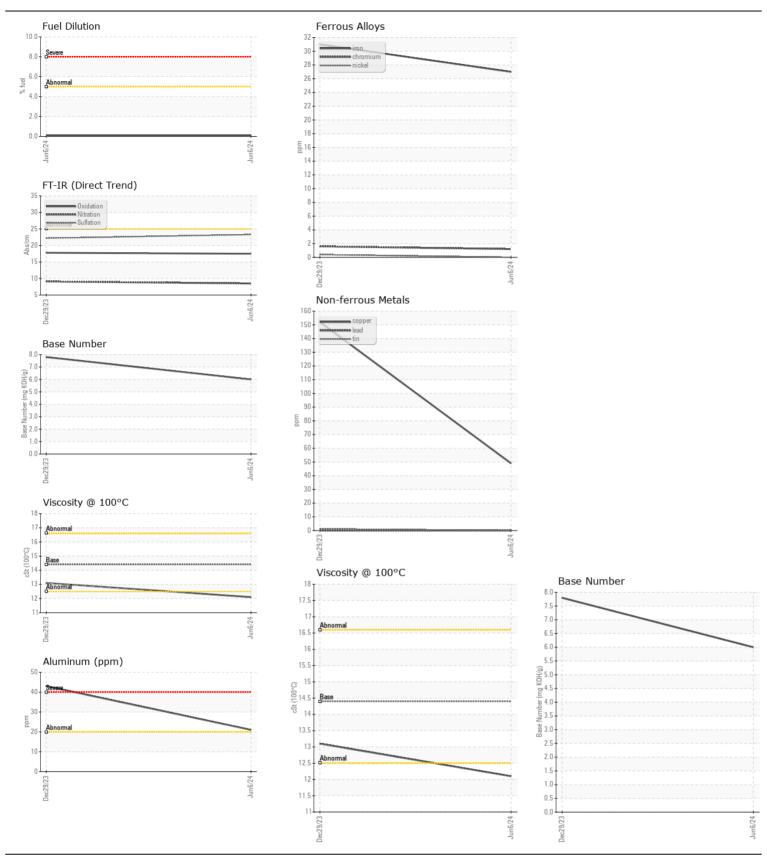





Certificate L2367

Laboratory Sample No.

: WC0918508 Lab Number : 06219157 Unique Number: 11097354

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

**Tested** Diagnosed Test Package: FLEET (Additional Tests: FuelDilution, PercentFuel)

: 27 Jun 2024 : 27 Jun 2024 - Wes Davis

: 24 Jun 2024

SALEM NATIONALEASE CORPORATION 198 PARK PLAZA DRIVE WINSTON SALEM, NC

US 27105 Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: Contact/Location: Audrey Hopkins - SALWIN