



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
MASSEY FERGERSON MASSY FERGESON 8S265
 Component
Diesel Engine
 Fluid
DURALENE Dura-Max 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0030917	DC0033569	---
Sample Date		Client Info		18 Jun 2024	11 Apr 2024	---
Machine Age	hrs	Client Info		5840	5225	---
Oil Age	hrs	Client Info		615	525	---
Filter Age	hrs	Client Info		615	525	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	23	14	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	4	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	<1	2	---
Lead	ppm	ASTM D5185m	>40	1	3	---
Copper	ppm	ASTM D5185m	>330	4	14	---
Tin	ppm	ASTM D5185m	>15	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	22	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	5.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	18.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	---
Boron	ppm	ASTM D5185m		5	0	---
Barium	ppm	ASTM D5185m		0	2	---
Molybdenum	ppm	ASTM D5185m		55	66	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		927	1009	---
Calcium	ppm	ASTM D5185m		1354	1131	---
Phosphorus	ppm	ASTM D5185m		1089	1201	---
Zinc	ppm	ASTM D5185m		1354	1303	---
Sulfur	ppm	ASTM D5185m		3877	3656	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.8	10.2	---
Visc @ 100°C	cSt	ASTM D445		13.8	14.5	---

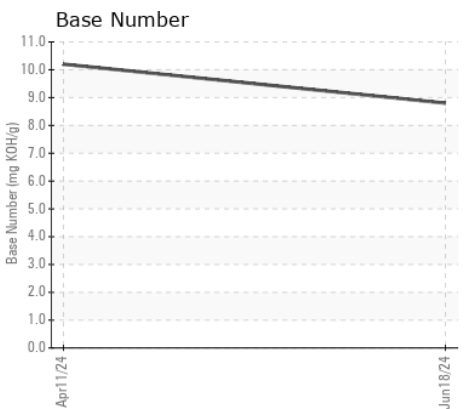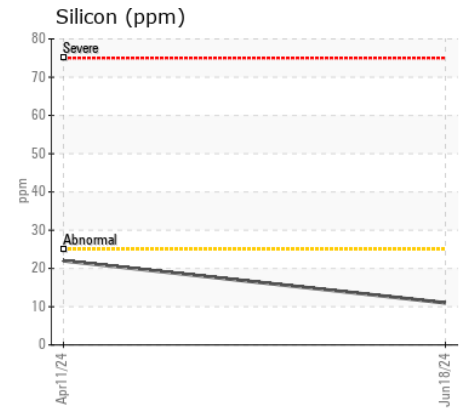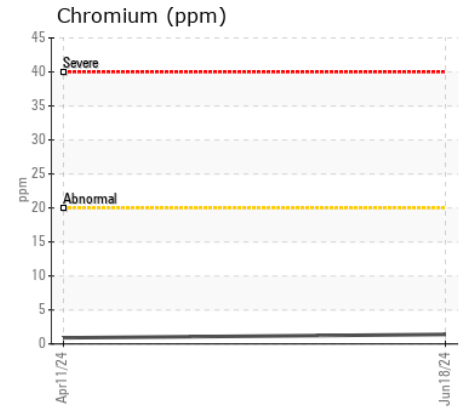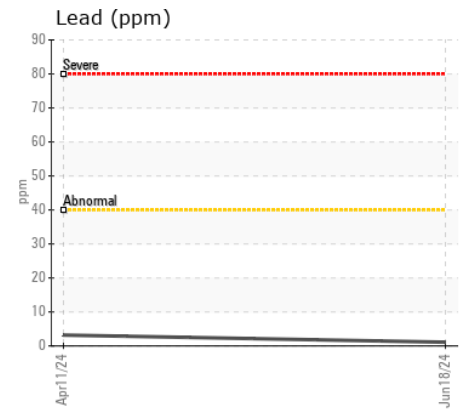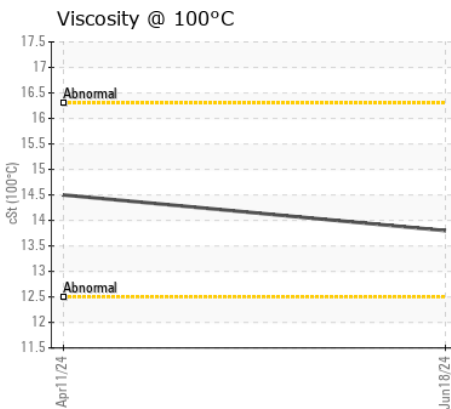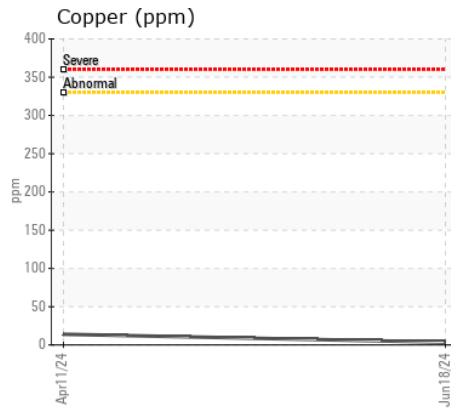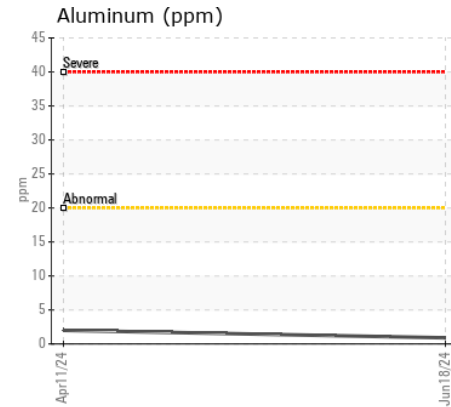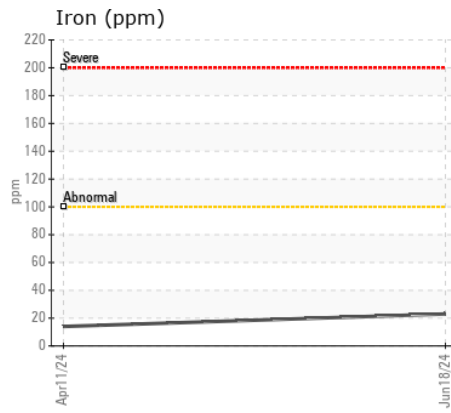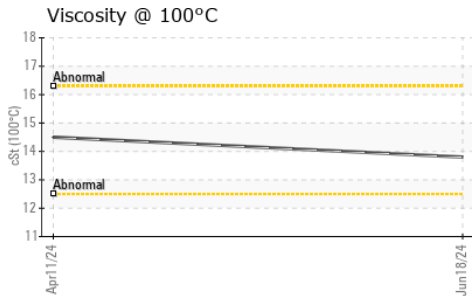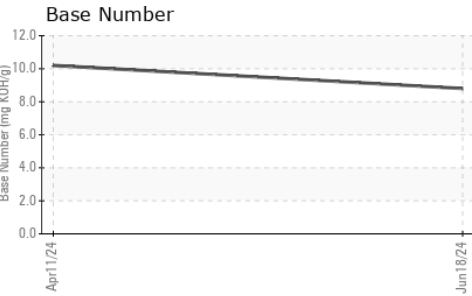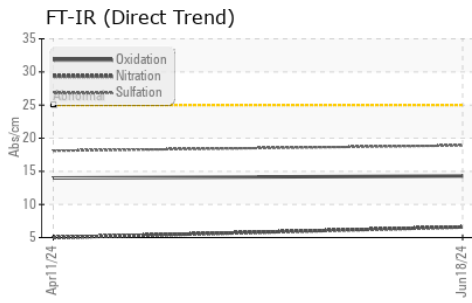

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0030917 **Received** : 24 Jun 2024
Lab Number : 06219189 **Tested** : 25 Jun 2024
Unique Number : 11097386 **Diagnosed** : 26 Jun 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MERCER VU FARMS
 12275 MT PLEASANT RD
 MERCERSBURG, PA
 US 17236
 Contact: RYAN LEASURE
 ryanleasure@yahoo.com
 T: (717)404-5913
 F: