



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W22521-BANKS]

Machine Id

JOHN DEERE 4044M 1LV4044MPTM112419

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204401	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		353	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	12	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>31	7	---	---
Lead	ppm	ASTM D5185m	>26	1	---	---
Copper	ppm	ASTM D5185m	>26	1	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	13	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	---	---
Boron	ppm	ASTM D5185m		348	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		304	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		1000	---	---
Calcium	ppm	ASTM D5185m		1674	---	---
Phosphorus	ppm	ASTM D5185m		1200	---	---
Zinc	ppm	ASTM D5185m		1292	---	---
Sulfur	ppm	ASTM D5185m		3933	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.7	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	---	---

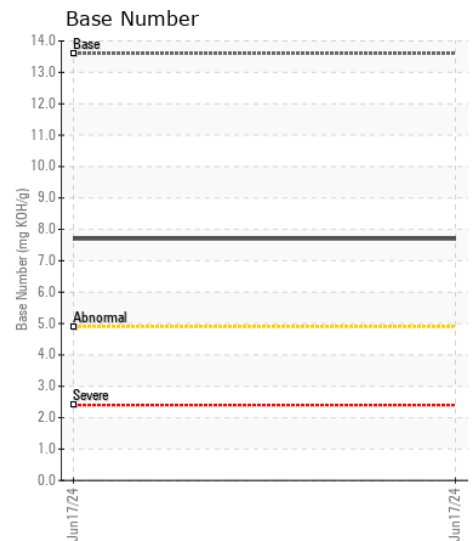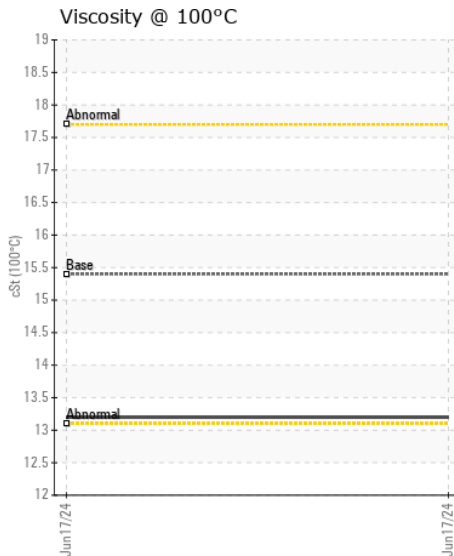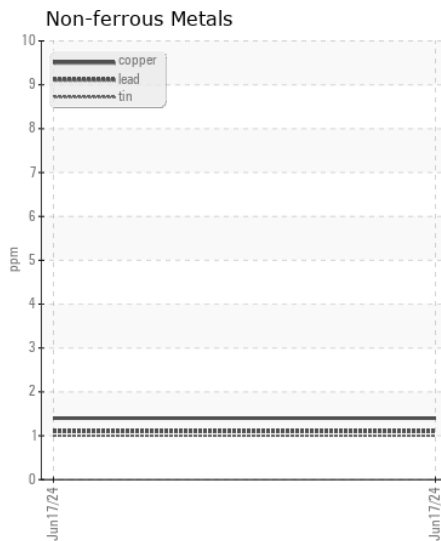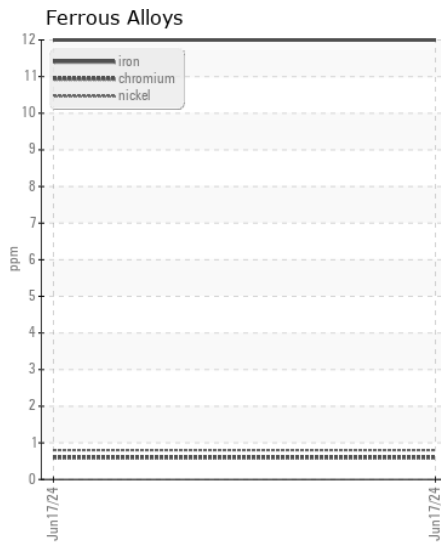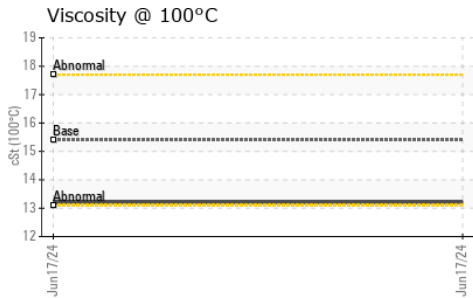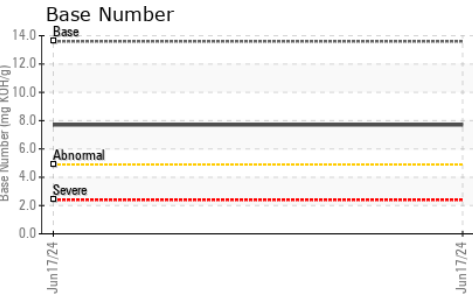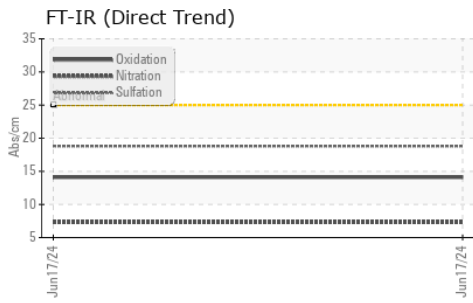

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0204401

Lab Number : 06219193

Unique Number : 11097390

Test Package : CONST (Additional Tests: TBN)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 26 Jun 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - BURKEVILLE

510 WEST COLONIAL DR

BURKEVILLE, VA

US 23922

Contact: RACHEL HARRIS

RACHEL.HARRIS@JAMESRIVEREQUIPMENT.COM

T: (434)767-5578

F: (434)767-3774