



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Pillen Family Farms

Machine Id
MILTK43

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		SBP0006852	SBP0006794	SBP0005339
Sample Date		Client Info		05 Jun 2024	16 Apr 2024	21 Feb 2024
Machine Age	hrs	Client Info		350	350	350
Oil Age	hrs	Client Info		0	0	350
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	9	7	22
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	3	0	4
Lead	ppm	ASTM D5185m	>40	1	<1	1
Copper	ppm	ASTM D5185m	>330	<1	0	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	3	6
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	6.9	7.1	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	19.2	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	1	2	2
Boron	ppm	ASTM D5185m	250	1	0	2
Barium	ppm	ASTM D5185m	10	1	0	0
Molybdenum	ppm	ASTM D5185m	100	61	62	68
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	953	1073	1040
Calcium	ppm	ASTM D5185m	3000	1095	1194	1129
Phosphorus	ppm	ASTM D5185m	1150	1155	1147	1129
Zinc	ppm	ASTM D5185m	1350	1265	1435	1353
Sulfur	ppm	ASTM D5185m	4250	3331	3923	3299
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.6	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.1	8.2	8.4
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	13.9	13.7


FT-IR (Direct Trend)

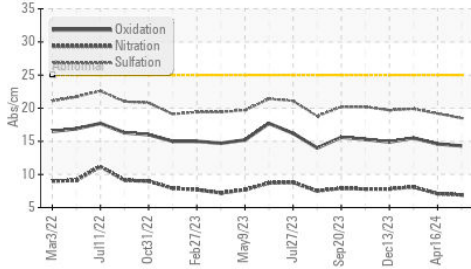


Base Number

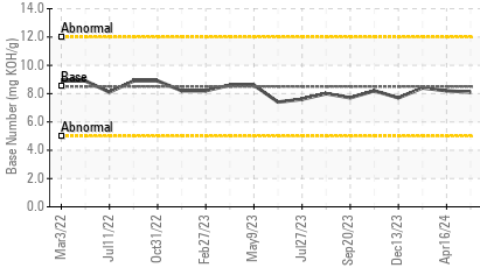


Viscosity @ 100°C

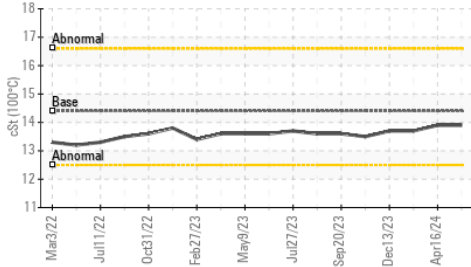


Ferrous Alloys

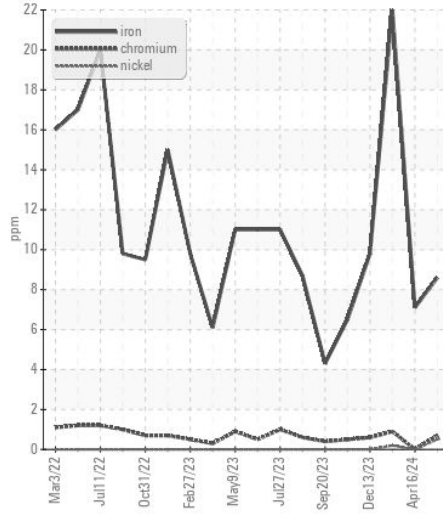


Non-ferrous Metals

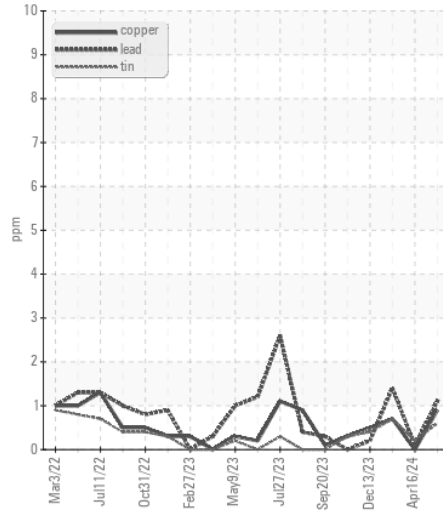

Viscosity @ 100°C

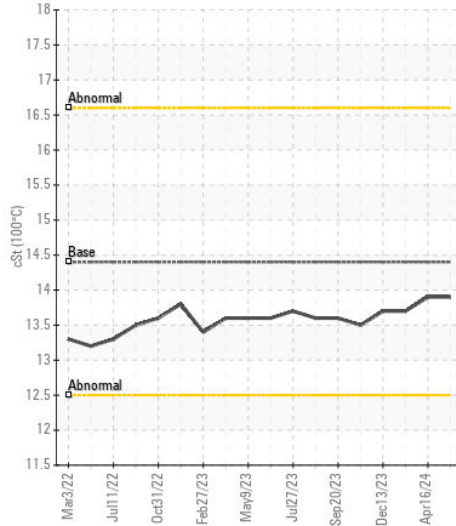

Base Number

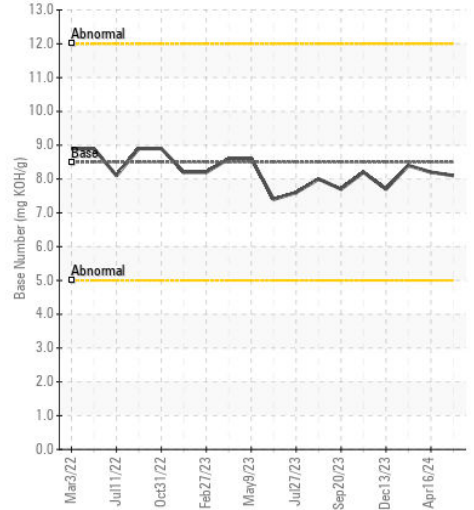

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : SBP0006852

Lab Number : 06219226

Unique Number : 11097423

Test Package : FLEET

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Wes Davis

Pillen Family Farms - 722828

26741 NE-91

Humphrey, NE

US 61357

Contact: Troy Runge

troyfr@pillenfamilyfarms.com

T: (308)390-6733

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)