



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**728058-361020**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0112260</b>	GFL0112263	GFL0112208
Sample Date		Client Info		<b>21 Jun 2024</b>	17 May 2024	26 Apr 2024
Machine Age	hrs	Client Info		<b>15819</b>	15003	14831
Oil Age	hrs	Client Info		<b>150</b>	150	600
Filter Age	hrs	Client Info		<b>150</b>	150	600
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>7</b>	3	8
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	2	1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	26	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.3</b>	6.1	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	18.2	19.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	21	3
Boron	ppm	ASTM D5185m	0	<b>1</b>	1	0
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	59	56
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>861</b>	889	928
Calcium	ppm	ASTM D5185m	1070	<b>1018</b>	983	1044
Phosphorus	ppm	ASTM D5185m	1150	<b>1026</b>	1015	1015
Zinc	ppm	ASTM D5185m	1270	<b>1171</b>	1192	1205
Sulfur	ppm	ASTM D5185m	2060	<b>2923</b>	3417	3404
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	13.9	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.1</b>	8.0	7.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.6	13.3

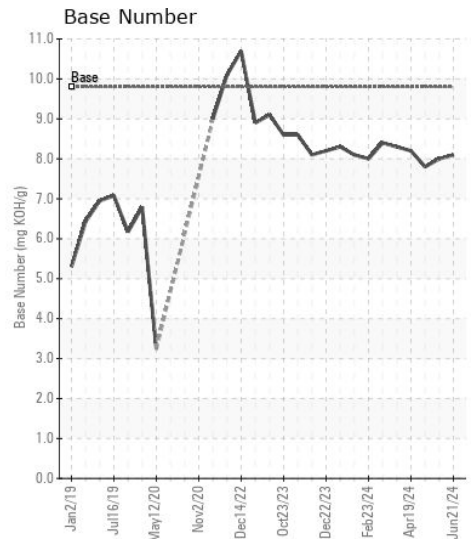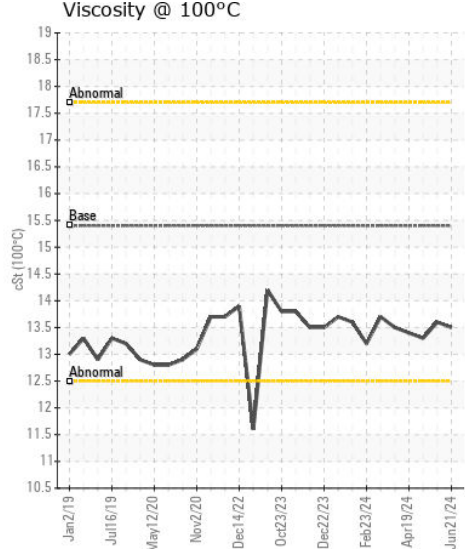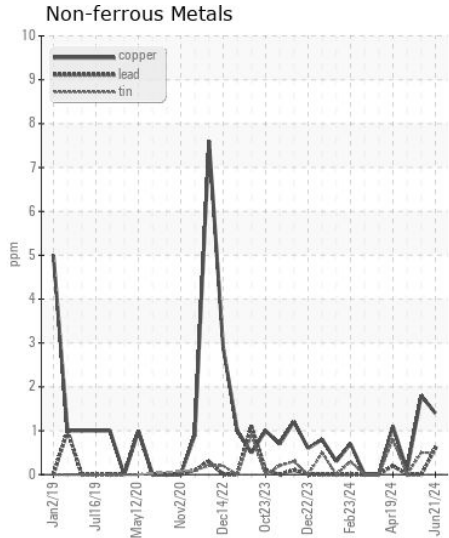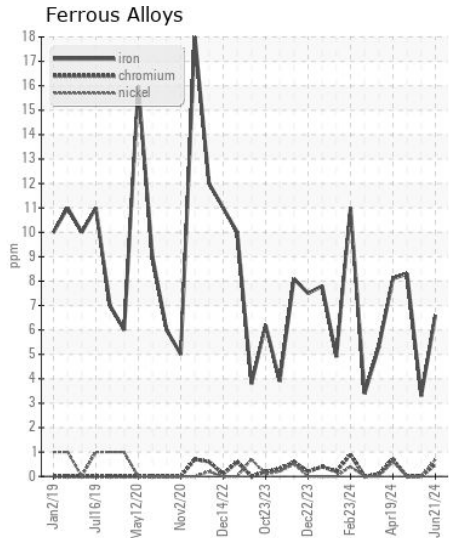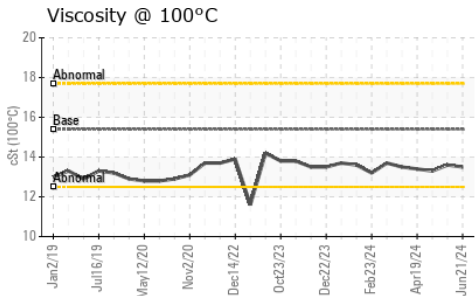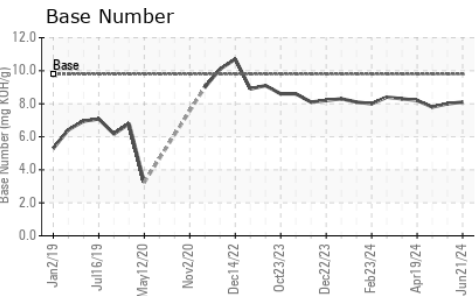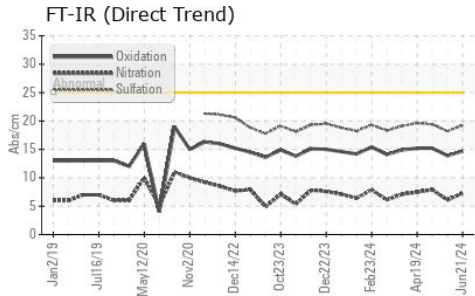

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112260  
**Lab Number** : 06219262  
**Unique Number** : 11097459  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**GFL Environmental - 829 - Wilco Hauling**  
 5054 Highway HH  
 Hartville, MO  
 US 65667  
 Contact: James Jones  
 james.jones@gflenv.com  
 T: (417)349-5006  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)