



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**VOLVO L260H 1290**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0011189</b>	ASC0011416	ASC0010157
Sample Date		Client Info		<b>20 Jun 2024</b>	14 May 2024	10 Apr 2024
Machine Age	hrs	Client Info		<b>6883</b>	6615	6351
Oil Age	hrs	Client Info		<b>300</b>	500	500
Filter Age	hrs	Client Info		<b>300</b>	500	500
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>2</b>	1	0
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	1	0
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>3</b>	3	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.3</b>	5.4	5.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.5</b>	17.1	17.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>0</b>	2	<1
Boron	ppm	ASTM D5185m	250	<b>2</b>	6	<1
Barium	ppm	ASTM D5185m	10	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>58</b>	59	60
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>913</b>	936	1038
Calcium	ppm	ASTM D5185m	3000	<b>1060</b>	1042	1205
Phosphorus	ppm	ASTM D5185m	1150	<b>1095</b>	1040	1145
Zinc	ppm	ASTM D5185m	1350	<b>1228</b>	1240	1302
Sulfur	ppm	ASTM D5185m	4250	<b>3258</b>	3663	4007
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.0</b>	12.8	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>9.0</b>	8.6	9.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	13.5	13.6


**FT-IR (Direct Trend)**

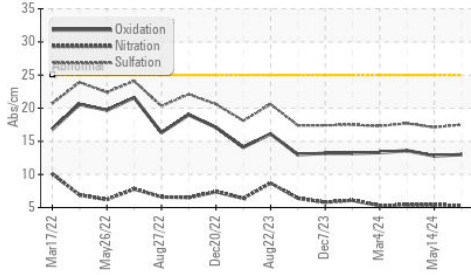


**Base Number**

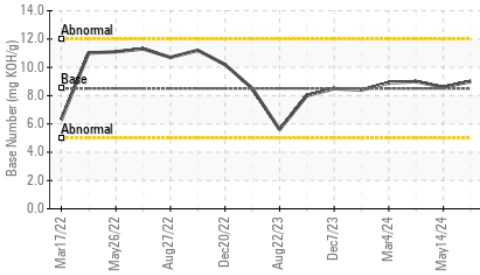


**Viscosity @ 100°C**

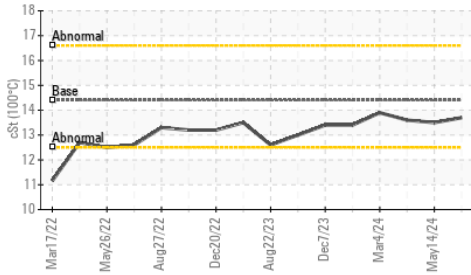


**Ferrous Alloys**

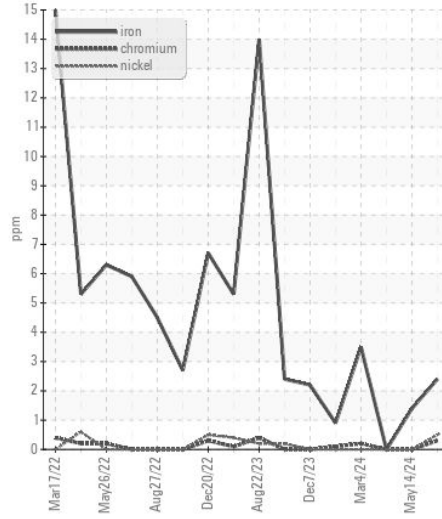


**Non-ferrous Metals**

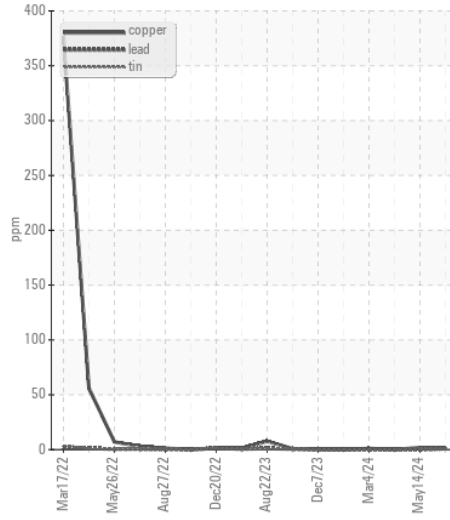

**Viscosity @ 100°C**

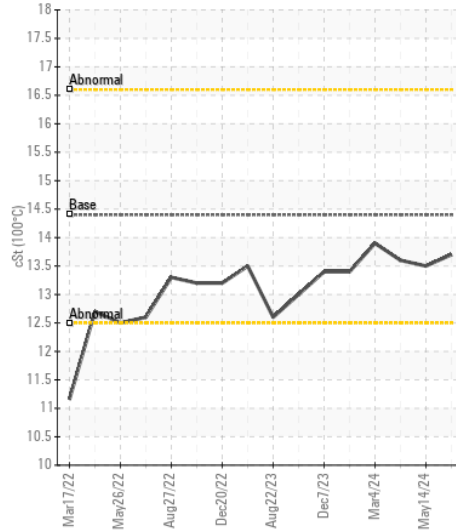

**Base Number**

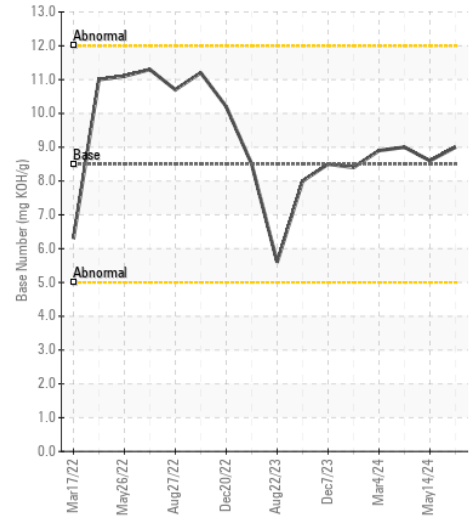

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011189 **Received** : 25 Jun 2024  
**Lab Number** : 06219267 **Tested** : 25 Jun 2024  
**Unique Number** : 11097464 **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**HANSON SOUTHEAST**  
 NC HWY 117  
 ERWIN, NC  
 US 28339  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: