



Area

**MONTGOMERY**

Machine Id

**MACK 925033-142560**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- LTR)**



**RECOMMENDATION**

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0091268</b>	GFL0088026	GFL0088011
Sample Date		Client Info		<b>20 Jun 2024</b>	30 May 2024	07 May 2024
Machine Age	hrs	Client Info		<b>25216</b>	25039	24920
Oil Age	hrs	Client Info		<b>1175</b>	0	879
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

**WEAR**

An increase in the copper level is noted.

Iron	ppm	ASTM D5185m	>120	<b>56</b>	19	16
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	<1	1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	8	7
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185m	>330	<b>163</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










Fuel content negligible. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>25	<b>37</b>	14	14
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	5	6
Fuel	%	ASTM D3524	>3.0	<b>2.2</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.2</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	9.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.4</b>	21.4	21.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		<b>6</b>	11	8
Boron	ppm	ASTM D5185m	0	<b>23</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>4</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	61	56
Manganese	ppm	ASTM D5185m	0	<b>7</b>	<1	1
Magnesium	ppm	ASTM D5185m	1010	<b>194</b>	923	874
Calcium	ppm	ASTM D5185m	1070	<b>1719</b>	1016	1000
Phosphorus	ppm	ASTM D5185m	1150	<b>823</b>	1031	902
Zinc	ppm	ASTM D5185m	1270	<b>970</b>	1223	1135
Sulfur	ppm	ASTM D5185m	2060	<b>2736</b>	2828	2753
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	17.1	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>5.1</b>	5.9	6.5
Visc @ 100°C	cSt	ASTM D445	15.4	<b>10.3</b>	13.2	13.3

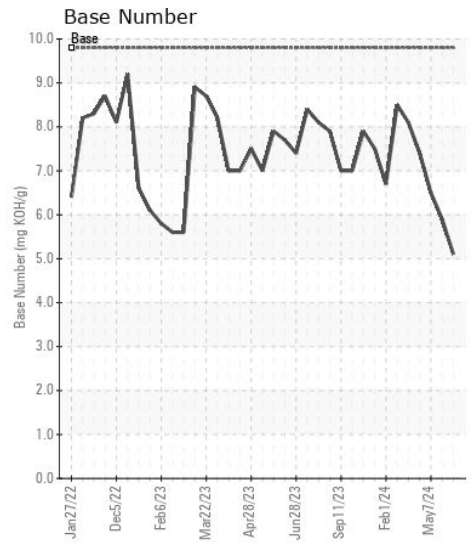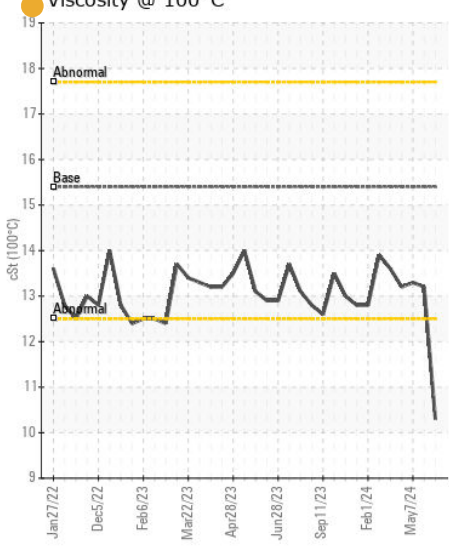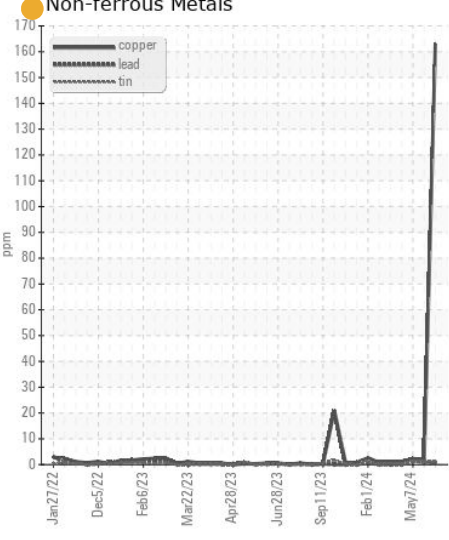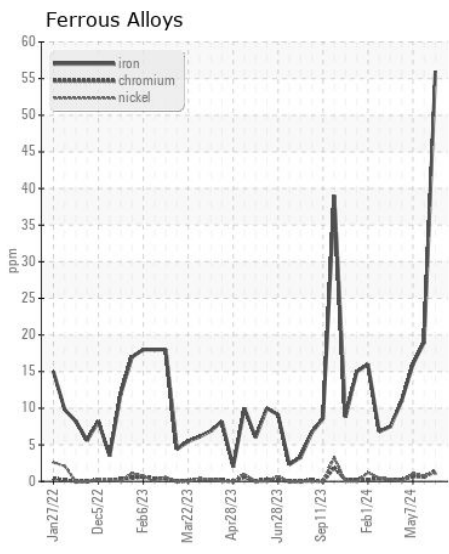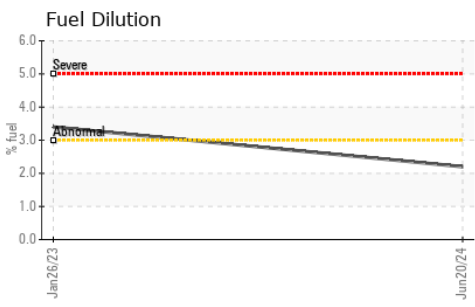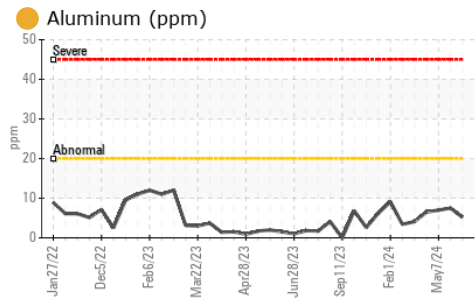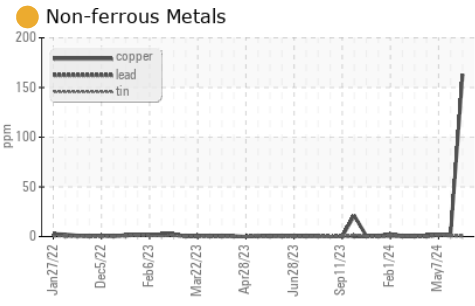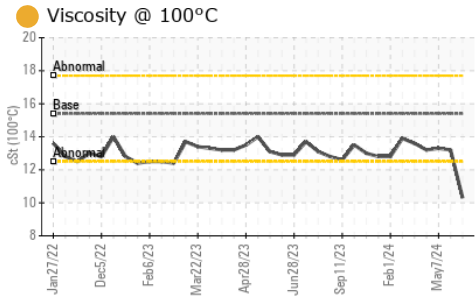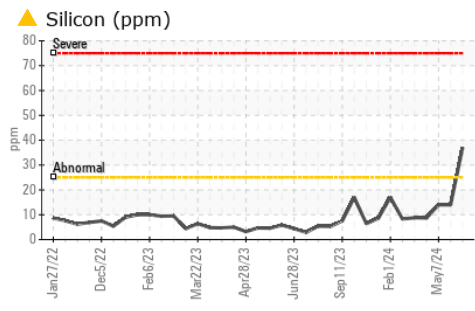

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091268 **Received** : 25 Jun 2024  
**Lab Number** : 06219310 **Tested** : 27 Jun 2024  
**Unique Number** : 11097507 **Diagnosed** : 27 Jun 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: