



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(3A0C96T) MONTGOMERY**  
Machine Id  
**AUTOCAR 3846**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0091265</b>	GFL0118422	GFL0088010
Sample Date		Client Info		<b>20 Jun 2024</b>	05 Jun 2024	24 May 2024
Machine Age	hrs	Client Info		<b>27906</b>	27165	27048
Oil Age	hrs	Client Info		<b>858</b>	117	980
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	<b>7</b>	6	5
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	1
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	2
Lead	ppm	ASTM D5185m	>150	<b>2</b>	1	2
Copper	ppm	ASTM D5185m	>90	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	<b>9</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	<b>0.2</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.1</b>	5.4	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.1</b>	17.7	18.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Boron	ppm	ASTM D5185m	0	<b>2</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	64	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>891</b>	912	936
Calcium	ppm	ASTM D5185m	1070	<b>1023</b>	1036	1027
Phosphorus	ppm	ASTM D5185m	1150	<b>1015</b>	1078	981
Zinc	ppm	ASTM D5185m	1270	<b>1193</b>	1201	1211
Sulfur	ppm	ASTM D5185m	2060	<b>2999</b>	3097	3119
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.6</b>	13.2	13.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.2</b>	8.4	7.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	14.0	13.8

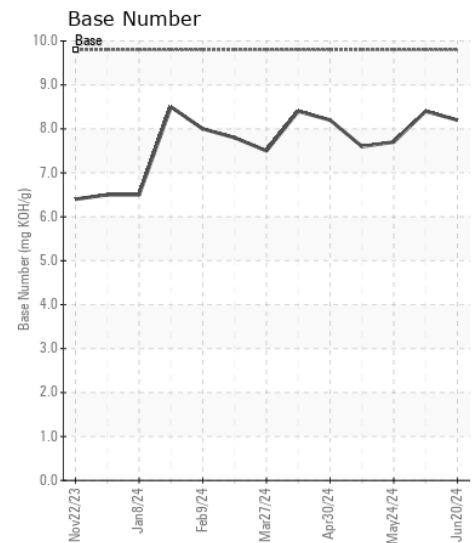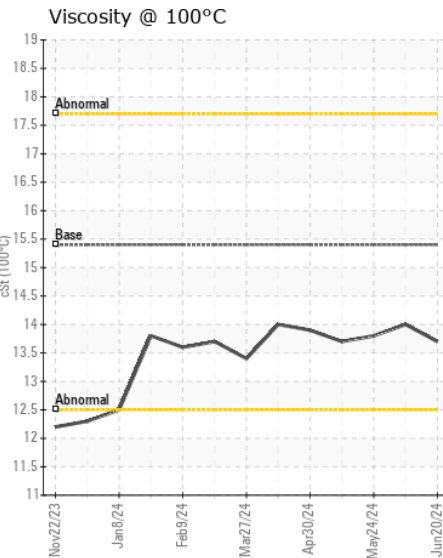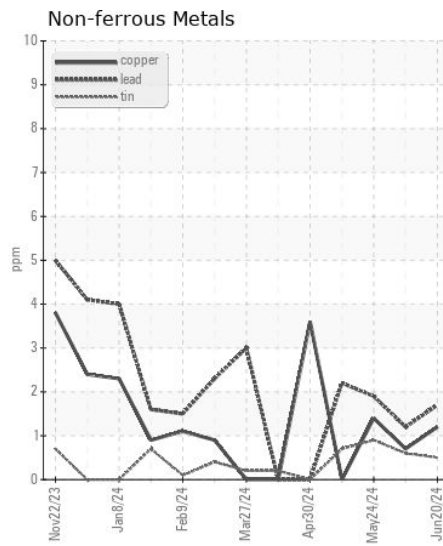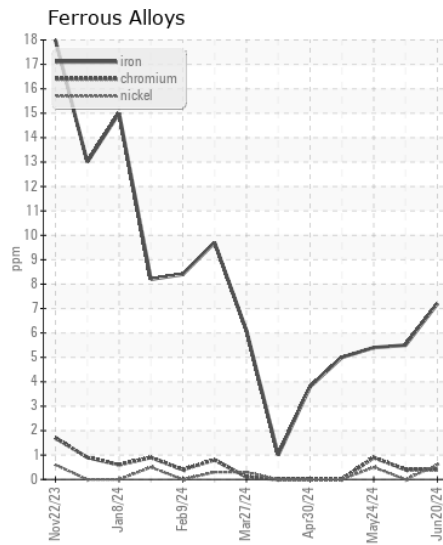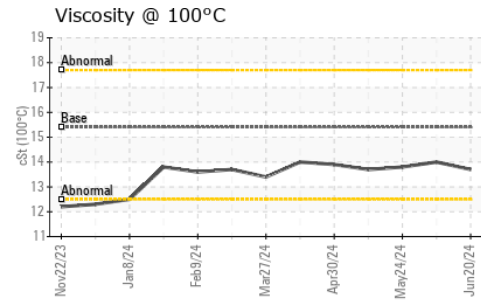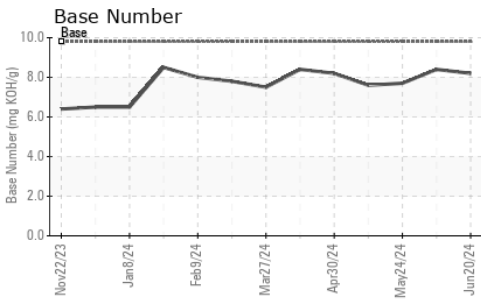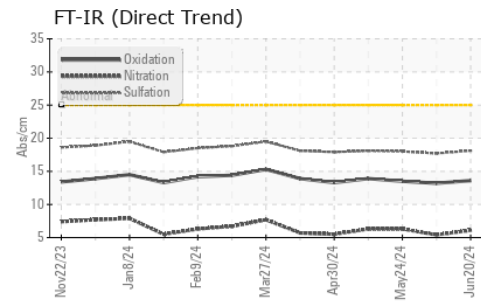

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091265  
**Lab Number** : 06219312  
**Unique Number** : 11097509  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Wes Davis

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: