



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**CUMMINS 8465076**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0020563</b>	RPL0018099	RPL0017453
Sample Date		Client Info		<b>17 Jun 2024</b>	29 Apr 2024	18 Jan 2024
Machine Age	mls	Client Info		<b>63896</b>	829	19946
Oil Age	mls	Client Info		<b>63896</b>	0	0
Filter Age	mls	Client Info		<b>63896</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>90	<b>35</b>	24	13
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	6	5
Lead	ppm	ASTM D5185m	>40	<b>6</b>	4	1
Copper	ppm	ASTM D5185m	>330	<b>7</b>	4	4
Tin	ppm	ASTM D5185m	>15	<b>3</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>11</b>	10	15
Potassium	ppm	ASTM D5185m	>20	<b>25</b>	21	18
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.4</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	9.5	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.0</b>	22.7	18.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	1	0
Boron	ppm	ASTM D5185m	0	<b>18</b>	25	9
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>48</b>	44	48
Manganese	ppm	ASTM D5185m		<b>2</b>	1	1
Magnesium	ppm	ASTM D5185m	0	<b>564</b>	565	821
Calcium	ppm	ASTM D5185m		<b>1604</b>	1603	989
Phosphorus	ppm	ASTM D5185m		<b>845</b>	882	895
Zinc	ppm	ASTM D5185m		<b>1043</b>	998	1063
Sulfur	ppm	ASTM D5185m		<b>2631</b>	2753	2655
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.1</b>	22.3	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>6.7</b>	7.7	8.3
Visc @ 100°C	cSt	ASTM D445	14	<b>13.5</b>	13.1	13.6


**FT-IR (Direct Trend)**

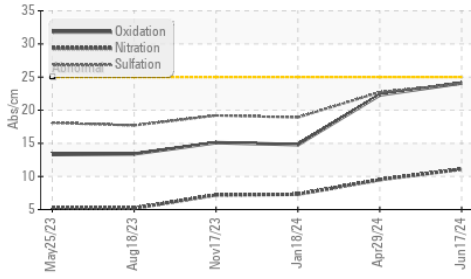


**Ferrous Alloys**

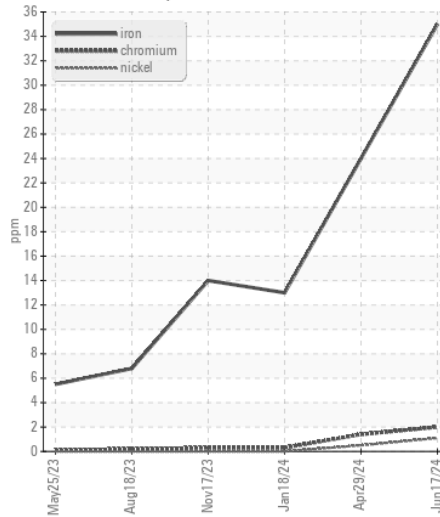


**Base Number**

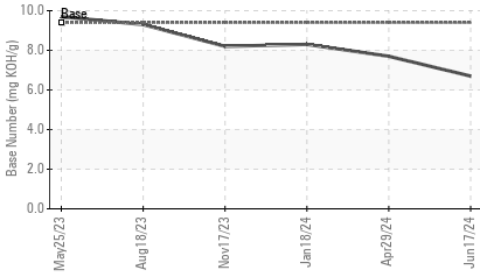


**Non-ferrous Metals**

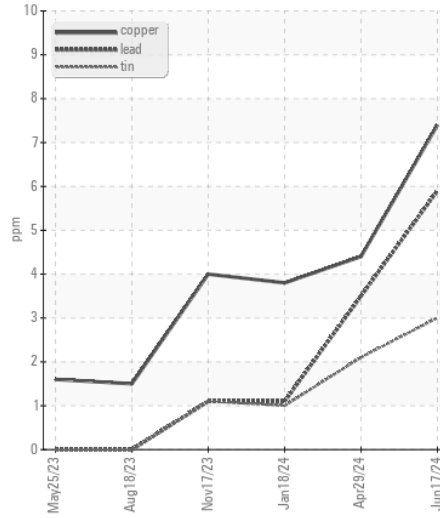


**Viscosity @ 100°C**

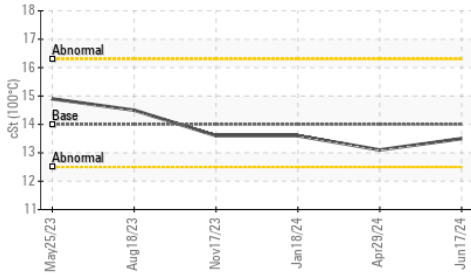

**Viscosity @ 100°C**

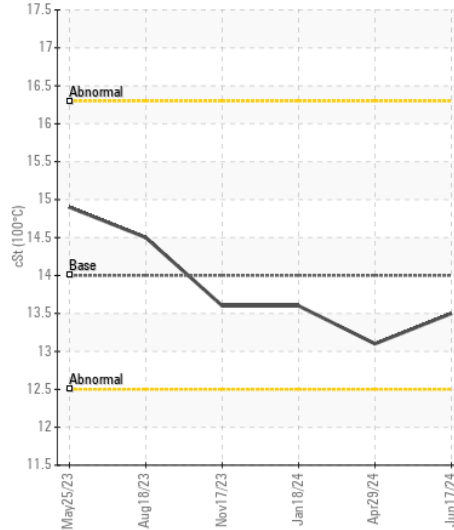

**Base Number**

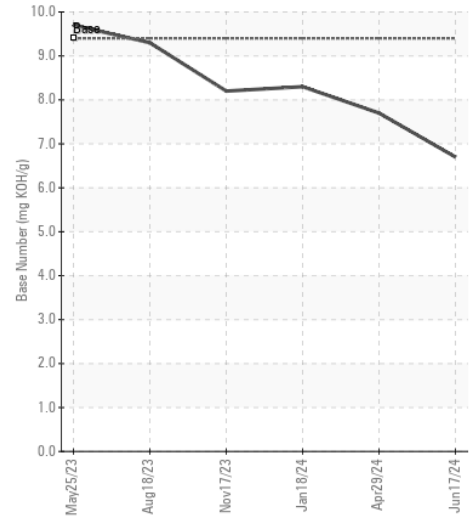

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RPL0020563

**Lab Number** : 06219322

**Unique Number** : 11097519

**Test Package** : FLEET

**Received** : 25 Jun 2024

**Tested** : 25 Jun 2024

**Diagnosed** : 25 Jun 2024 - Wes Davis

**RTL PACLEASE - 7007 - Fontana**

3121 South Riverside

Bloomington, CA

US 92316

Contact: Rudy Trevizo

TrevizoR@RushEnterprises.Com

T: (909)829-1044

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)