



WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**

OIL ANALYSIS REPORT

Area

[44953125]

Machine Id

PETERBILT 9571820

Component

Diesel Engine

Fluid

MOBIL DELVAC MX 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0016514	RPL0013701	---
Sample Date		Client Info		08 Jun 2024	17 Nov 2023	---
Machine Age	mls	Client Info		24131	12010	---
Oil Age	mls	Client Info		24131	12010	---
Filter Age	mls	Client Info		24131	12010	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>110	38	25	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>2	<1	<1	---
Aluminum	ppm	ASTM D5185m	>25	8	7	---
Lead	ppm	ASTM D5185m	>45	<1	<1	---
Copper	ppm	ASTM D5185m	>85	16	15	---
Tin	ppm	ASTM D5185m	>4	1	1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	16	14	---
Potassium	ppm	ASTM D5185m	>20	19	14	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	11.5	8.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	22.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		74	143	---
Barium	ppm	ASTM D5185m		5	0	---
Molybdenum	ppm	ASTM D5185m		103	97	---
Manganese	ppm	ASTM D5185m		6	5	---
Magnesium	ppm	ASTM D5185m		648	702	---
Calcium	ppm	ASTM D5185m		1397	1366	---
Phosphorus	ppm	ASTM D5185m		673	699	---
Zinc	ppm	ASTM D5185m		876	862	---
Sulfur	ppm	ASTM D5185m		2467	2126	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.6	18.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	12	6.3	7.7	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.5	---


FT-IR (Direct Trend)

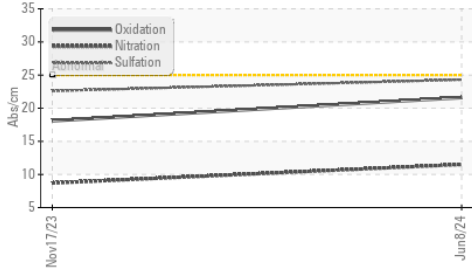


Ferrous Alloys

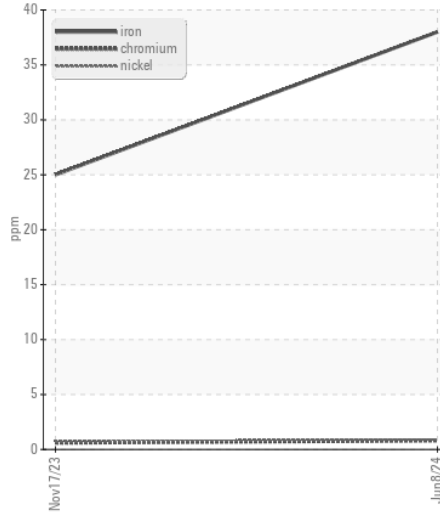


Base Number

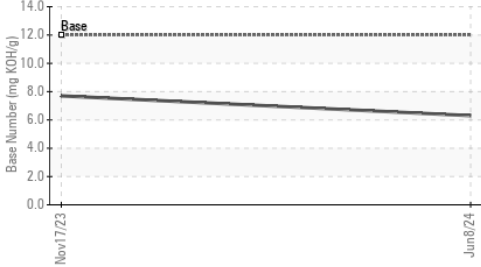


Non-ferrous Metals

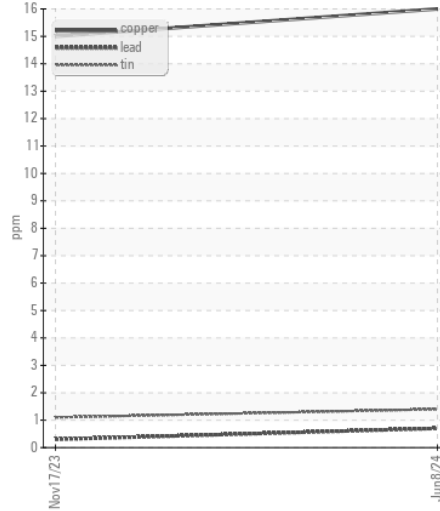


Viscosity @ 100°C

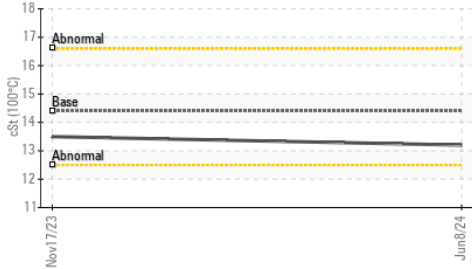

Viscosity @ 100°C

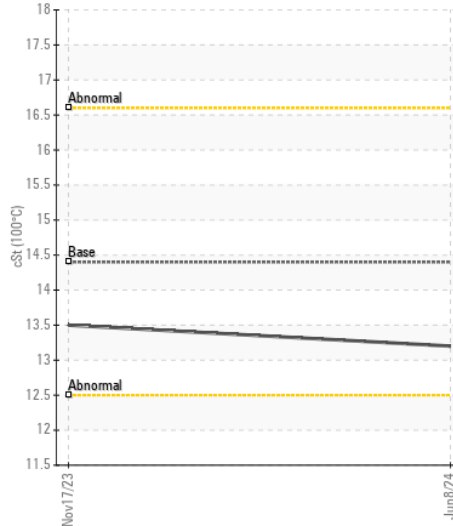

Base Number

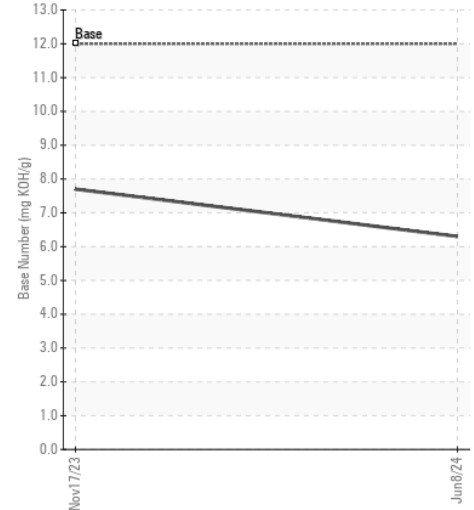

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : RPL0016514
 Lab Number : 06219334
 Unique Number : 11097531
 Test Package : FLEET

Received : 25 Jun 2024
 Tested : 25 Jun 2024
 Diagnosed : 25 Jun 2024 - Wes Davis

RTL PACLEASE - 7002 - San Antonio
 8810 IH-10 Frontage Road
 Converse, TX
 US 78109
 Contact: Mike Friel
 FrielM@RushEnterprises.Com
 T: (210)901-7283
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)