



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
IAN
Machine Id
IAN (S/N LO TANK)
Component
Center Main Engine
Fluid
CHEVRON DELO 710 LS (300 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0054869	MW0065476	MW0054874
Sample Date		Client Info		25 May 2024	19 Feb 2024	31 Dec 2023
Machine Age	hrs	Client Info		18014	15692	80817
Oil Age	hrs	Client Info		18014	1060	14697
Filter Age	hrs	Client Info		1153	1060	1046
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	6	7	7
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	2	3	3
Lead	ppm	ASTM D5185m	>18	<1	2	2
Copper	ppm	ASTM D5185m	>80	7	8	8
Tin	ppm	ASTM D5185m	>14	1	2	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	2	2	2
Potassium	ppm	ASTM D5185m	>20	1	3	3
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.8	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.3	15.8	15.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	1	0	0
Boron	ppm	ASTM D5185m		39	40	39
Barium	ppm	ASTM D5185m		0	2	2
Molybdenum	ppm	ASTM D5185m		46	47	46
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		23	8	9
Calcium	ppm	ASTM D5185m		3609	3532	3549
Phosphorus	ppm	ASTM D5185m		14	8	7
Zinc	ppm	ASTM D5185m		15	3	3
Sulfur	ppm	ASTM D5185m		2644	2331	2392
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.7	9.4	9.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	6.8	6.7	6.6
Visc @ 100°C	cSt	ASTM D445	15.5	14.7	14.8	14.8


FT-IR (Direct Trend)

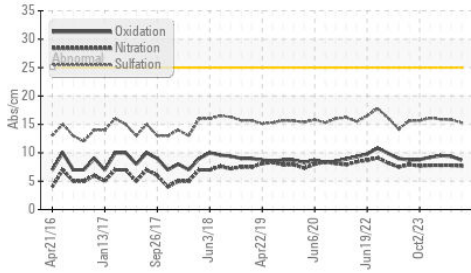


Base Number

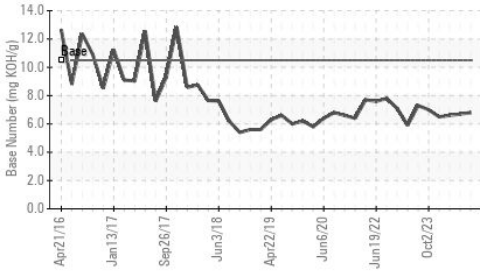


Viscosity @ 100°C

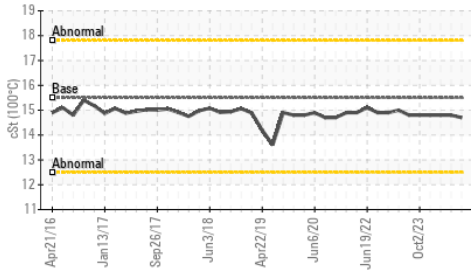


Ferrous Alloys

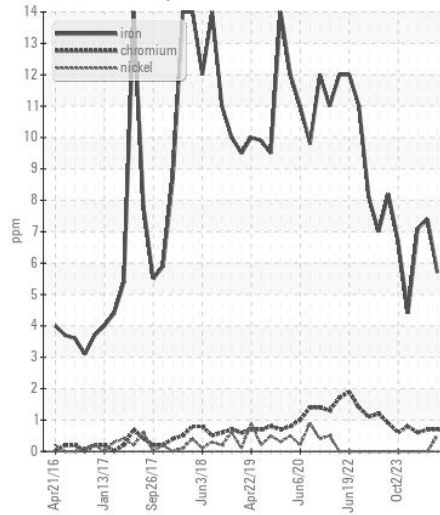


Non-ferrous Metals

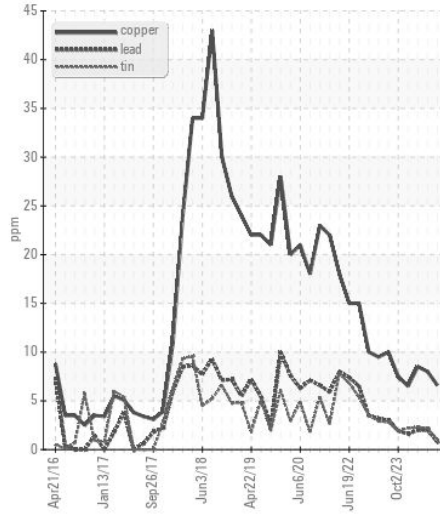

Viscosity @ 100°C

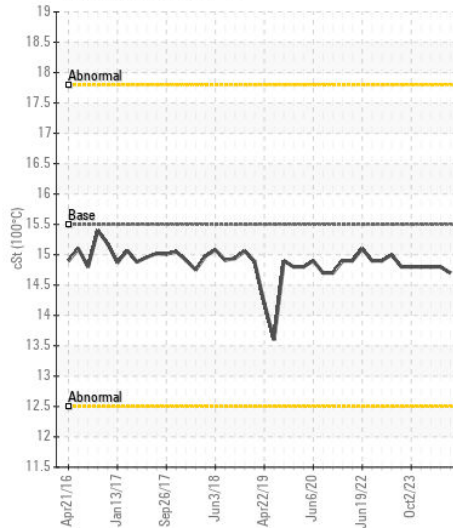

Base Number

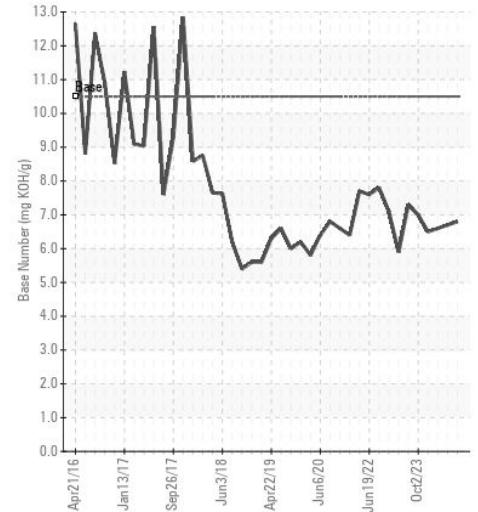

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0054869
Lab Number : 06219396
Unique Number : 11097593
Test Package : MAR 2

Received : 25 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

AMERICAN RIVER TRANSPORTATION CO.
 P.O. BOX 2889
 ST. LOUIS, MO
 US 63111
 Contact: JASON PORTER
 j_porter@admworld.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (314)481-5278