



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

FLEET

Machine Id

VOLVO 1926724 (S/N 4V4WC9EHXLN254797)

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 10W30 (42 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0128379	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	mls	Client Info		408540	---	---
Oil Age	mls	Client Info		38625	---	---
Filter Age	mls	Client Info		38625	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	41	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>2	3	---	---
Titanium	ppm	ASTM D5185m		15	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	8	---	---
Lead	ppm	ASTM D5185m	>40	3	---	---
Copper	ppm	ASTM D5185m	>330	6	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	17	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.8	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		10	---	---
Boron	ppm	ASTM D5185m	2	5	---	---
Barium	ppm	ASTM D5185m	0	1	---	---
Molybdenum	ppm	ASTM D5185m	50	44	---	---
Manganese	ppm	ASTM D5185m	0	1	---	---
Magnesium	ppm	ASTM D5185m	950	700	---	---
Calcium	ppm	ASTM D5185m	1050	1096	---	---
Phosphorus	ppm	ASTM D5185m	995	844	---	---
Zinc	ppm	ASTM D5185m	1180	1089	---	---
Sulfur	ppm	ASTM D5185m	2600	2502	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		4.7	---	---
Visc @ 100°C	cSt	ASTM D445	12.00	9.7	---	---

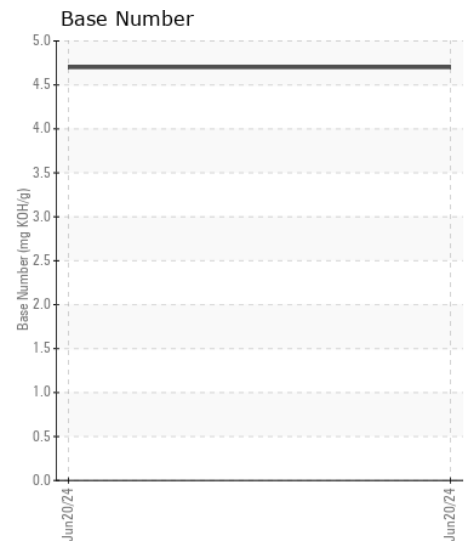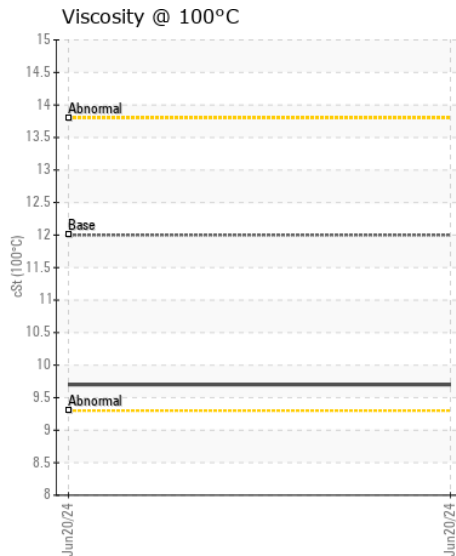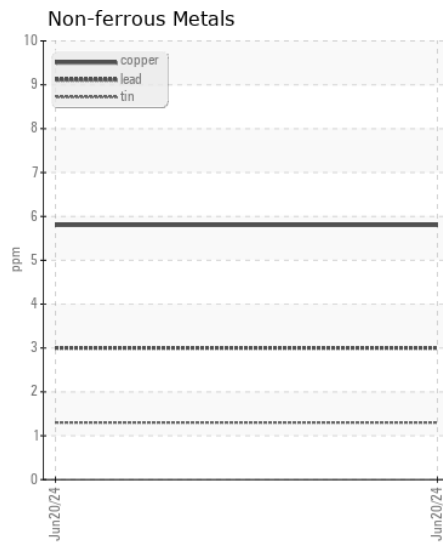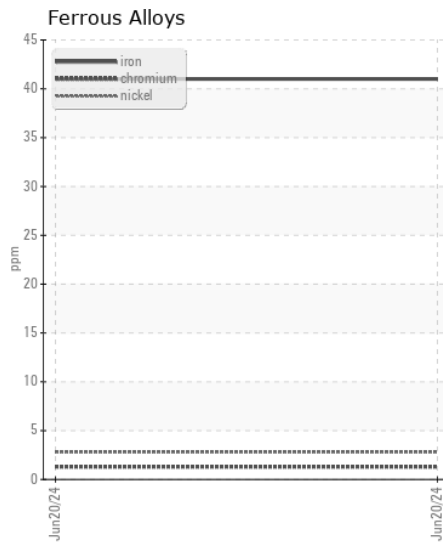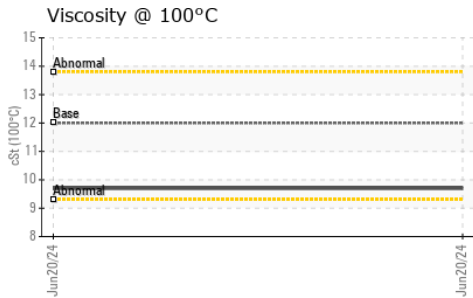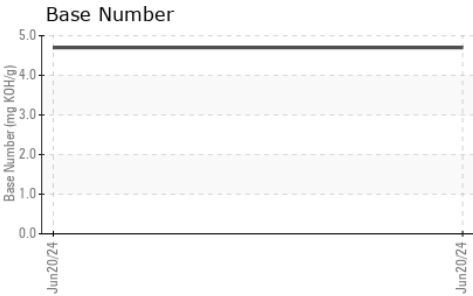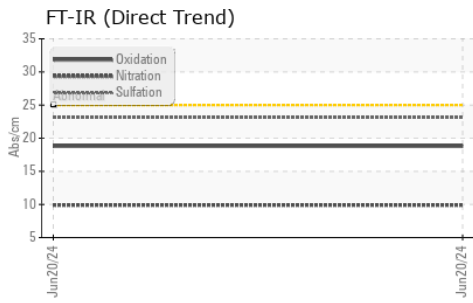

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0128379

Lab Number : 06219466

Unique Number : 11097663

Test Package : FLEET

Received : 25 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Don Baldrige

PERDUE FARMS - ACCOMAC

22520 LANKFORD HWY

ACCOMAC, VA

US 23301

Contact: PEGGY KIMES

peggy.kimes@perdue.com

T: (757)787-5304

F: (757)787-5208

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)