



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Area
Store 9 - Marietta

Machine Id
1076

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0051411	LEC0049558	LEC0049228
Sample Date		Client Info		18 Jun 2024	02 May 2024	26 Mar 2024
Machine Age	hrs	Client Info		40934	40370	37303
Oil Age	hrs	Client Info		400	400	400
Filter Age	hrs	Client Info		400	400	400
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	56	20	22
Chromium	ppm	ASTM D5185m	>20	2	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		2	1	2
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	7	3	3
Lead	ppm	ASTM D5185m	>40	19	4	12
Copper	ppm	ASTM D5185m	>330	19	2	4
Tin	ppm	ASTM D5185m	>15	1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Sodium and/or potassium levels are high.


Silicon	ppm	ASTM D5185m	>120	11	6	7
Potassium	ppm	ASTM D5185m	>20	641	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.1	0.7	0.8
Nitration	Abs/cm	*ASTM D7624	>20	10.8	9.2	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.4	24.0	24.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m		99	2	2
Boron	ppm	ASTM D5185m	316	123	261	244
Barium	ppm	ASTM D5185m	0.0	2	0	0
Molybdenum	ppm	ASTM D5185m	1.2	154	93	112
Manganese	ppm	ASTM D5185m		2	<1	<1
Magnesium	ppm	ASTM D5185m	24	445	479	613
Calcium	ppm	ASTM D5185m	2292	1436	1547	1615
Phosphorus	ppm	ASTM D5185m	1064	959	988	879
Zinc	ppm	ASTM D5185m	1160	1230	1185	1045
Sulfur	ppm	ASTM D5185m	4996	3111	3549	3412
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.2	18.1	19.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	6.9	6.9	7.6
Visc @ 100°C	cSt	ASTM D445	15.7	13.8	13.6	13.7


FT-IR (Direct Trend)

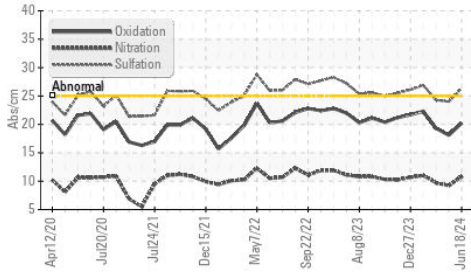


Base Number

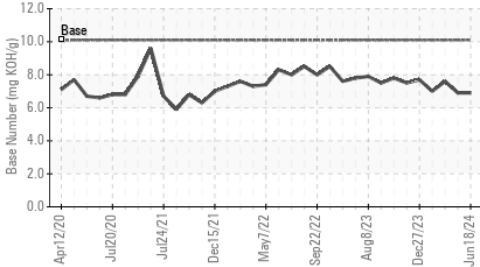


Viscosity @ 100°C

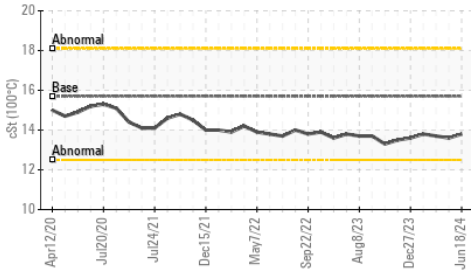


Glycol Contamination

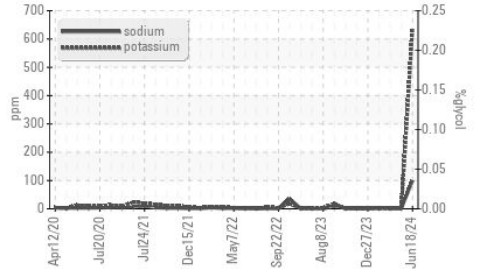


Ferrous Alloys

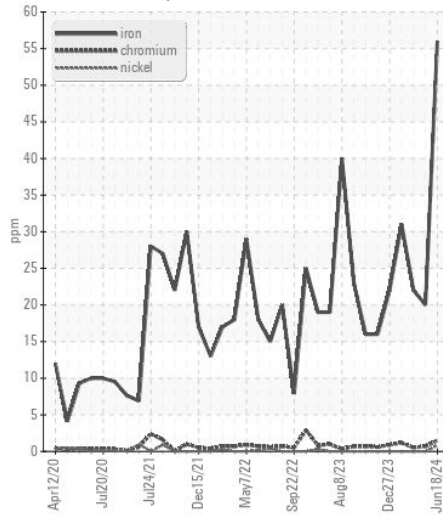


Non-ferrous Metals

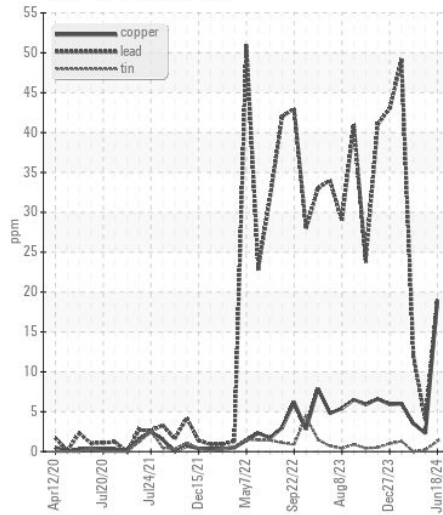

Viscosity @ 100°C

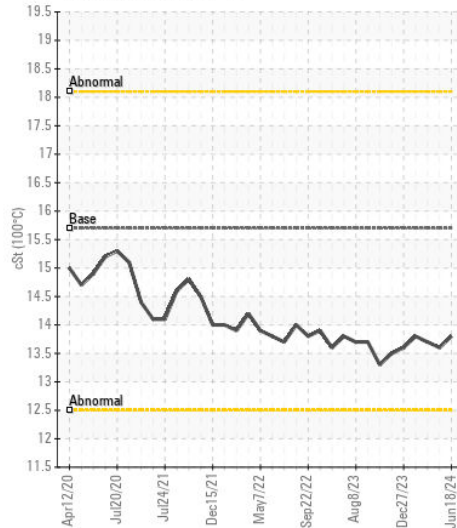

Base Number

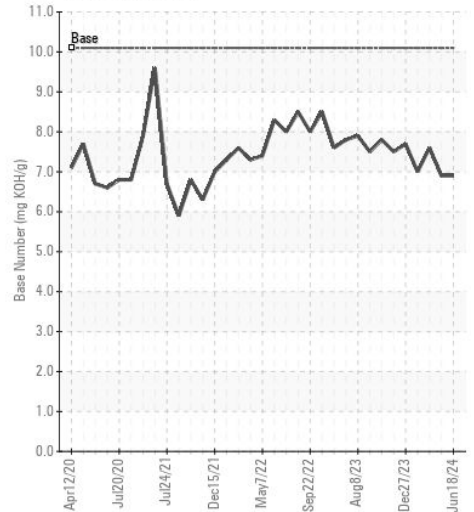

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0051411 **Received** : 25 Jun 2024
Lab Number : 06219493 **Tested** : 26 Jun 2024
Unique Number : 11097690 **Diagnosed** : 26 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: Glycol, TBN)

HALL DRILLING LLC
 PO BOX 249
 ELLENBORO, WV
 US 26346

Contact: CHRIS PETROVICH
 chrispetrovich@halldrilling.com
 T: (304)869-3404
 F: (304)869-3408

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)