

## Machine Id **30219** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Number		Client Info		WC0950745	WC0905282	WC0882595
	Sample Date	lava	Client Info		21 Jun 2024	29 Mar 2024	02 Feb 2024
	Machine Age	hrs	Client Info		807 750	502	242
	Oil Age Filter Age	hrs	Client Info		750 750	250 250	242 242
	Oil Changed	hrs	Client Info Client Info			Changed	Changed
	Filter Changed		Client Info		Changed Changed	Changed	
	Sample Status		Cilent Inio		NORMAL	ATTENTION	
	Sample Status					ATTENTION	ATTENTION
WEAR Metal levels are typical for a new component breaking in.	Iron	ppm	ASTM D5185m	>100	14	15	31
	Chromium	ppm	ASTM D5185m	>20	<1	<1	0
	Nickel	ppm	ASTM D5185m	>4	<1	0	0
	Titanium	ppm	ASTM D5185m		1	1	0
	Silver	ppm	ASTM D5185m	>3	<1	0	0
	Aluminum	ppm	ASTM D5185m	>20	3	3	3
	Lead	ppm	ASTM D5185m	>40	<1	0	0
	Copper	ppm	ASTM D5185m		2	2	13
	Tin	ppm	ASTM D5185m	>15	<1	<1	<1
	Vanadium	ppm	ASTM D5185m		<1	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	19	20	49
CONTAMINATION	Potassium	ppm	ASTM D5185m		3	0	2
There is no indication of any contamination in the oil.	Fuel	le le	WC Method	>5	<1.0	<1.0	1.5
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
	Nitration	Abs/cm	*ASTM D7624	>20	6.5	6.5	7.4
	Sulfation	Abs/.1mm	*ASTM D7415	>30	20.0	19.2	16.7
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	1	2	15
	Boron	ppm	ASTM D5185m		376	364	114
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		2	0	12
	Molybdenum	ppm	ASTM D5185m		86	83	84
	Manganese	ppm	ASTM D5185m		<1	<1	1
	Magnesium	ppm	ASTM D5185m	450	355	375	241
	Calcium	ppm	ASTM D5185m	3000	1389	1562	3429
	Phosphorus	ppm	ASTM D5185m	1150	930	977	1069
	Zinc	ppm	ASTM D5185m		1183	1175	1325
	Sulfur	ppm	ASTM D5185m	4250	3071	3598	5782

Oxidation

Visc @ 100°C cSt

Abs/.1mm \*ASTM D7414 >25

ASTM D445 14.4

Base Number (BN) mg KOH/g ASTM D2896 8.5

13.3

7.9

12.2

11.5


11.7

10.6

13.8

7.0

12.7

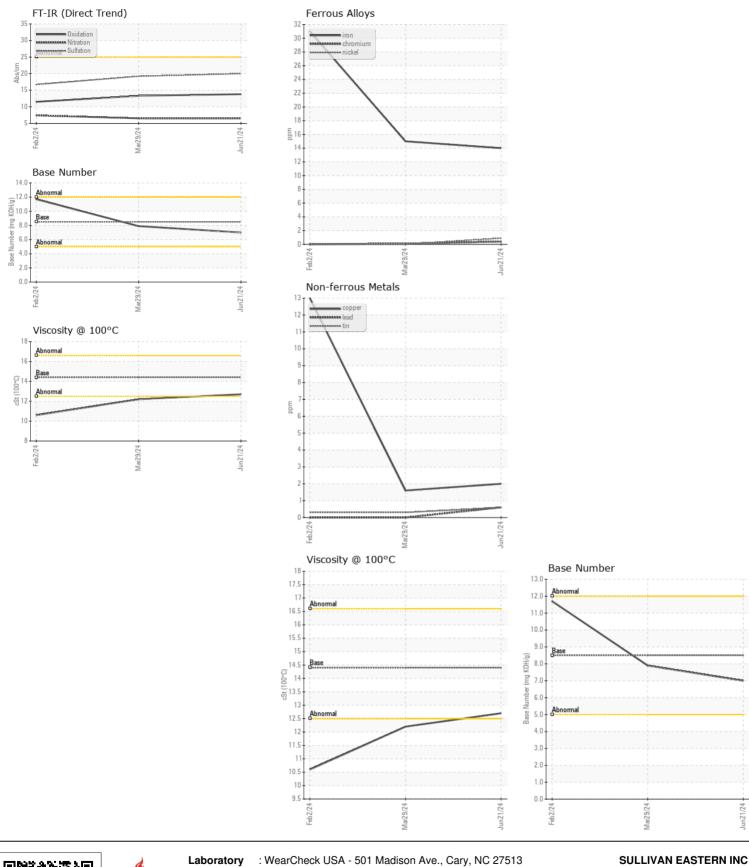

Sample No. : WC0950745 Received : 25 Jun 2024 2860 C SLATER RD Lab Number : 06219513 Tested : 26 Jun 2024 MORRISVILLE, NC Unique Number : 11097710 Diagnosed : 26 Jun 2024 - Wes Davis US 27560 Test Package : CONST (Additional Tests: TBN) Contact: SCOTT SULLIVAN Certificate L2367 ssullivan@sullivaneastern.com To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (919)484-8993 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (919)484-2136

Contact/Location: SCOTT SULLIVAN - MSCDUR Page 2 of 2