



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 624L 1DW624LZALF707698**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0212046</b>	JR0200522	JR0179898
Sample Date		Client Info		<b>21 Jun 2024</b>	05 Mar 2024	06 Dec 2023
Machine Age	hrs	Client Info		<b>6974</b>	6443	5987
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>21</b>	19	22
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	6	10
Lead	ppm	ASTM D5185m	>26	<b>1</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>2</b>	0	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>7</b>	6	9
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	3	14
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.9	1.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	9.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.6</b>	23.8	25.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>3</b>	3	4
Boron	ppm	ASTM D5185m		<b>88</b>	166	144
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>204</b>	250	287
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>532</b>	810	878
Calcium	ppm	ASTM D5185m		<b>1655</b>	1361	1524
Phosphorus	ppm	ASTM D5185m		<b>802</b>	898	951
Zinc	ppm	ASTM D5185m		<b>1059</b>	1070	1186
Sulfur	ppm	ASTM D5185m		<b>2957</b>	2792	3194
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.9</b>	17.4	18.5
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>7.0</b>	8.3	8.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.7	14.5


**FT-IR (Direct Trend)**

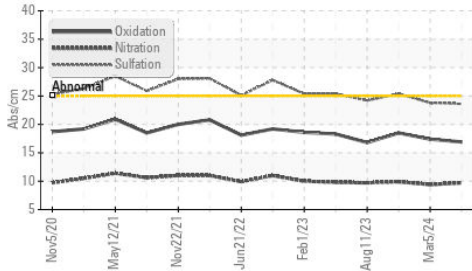


**Base Number**

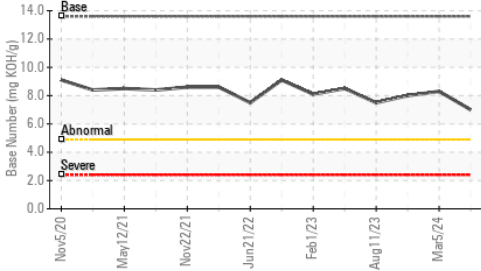


**Viscosity @ 100°C**

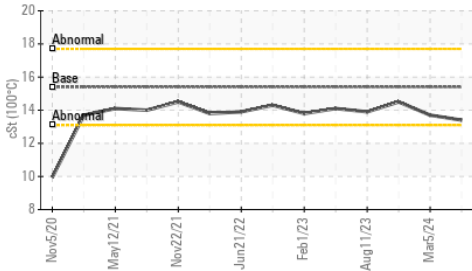


**Ferrous Alloys**

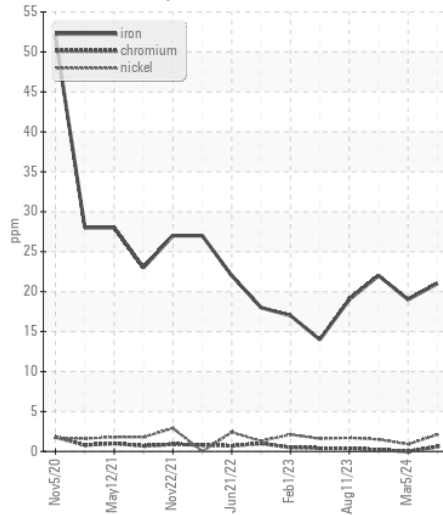


**Non-ferrous Metals**

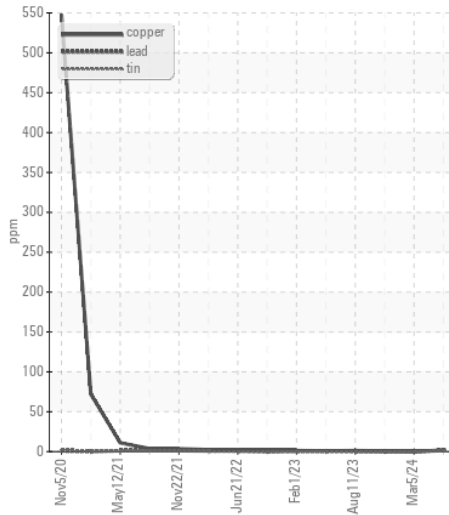

**Viscosity @ 100°C**

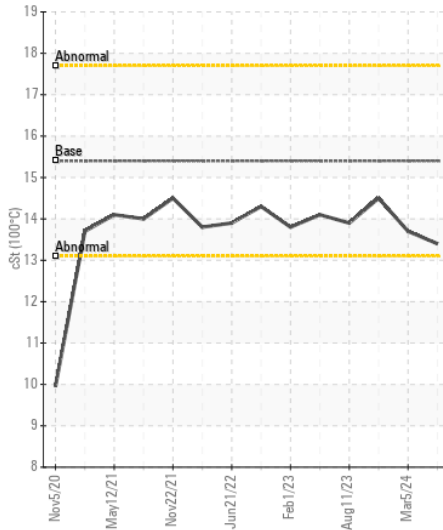

**Base Number**

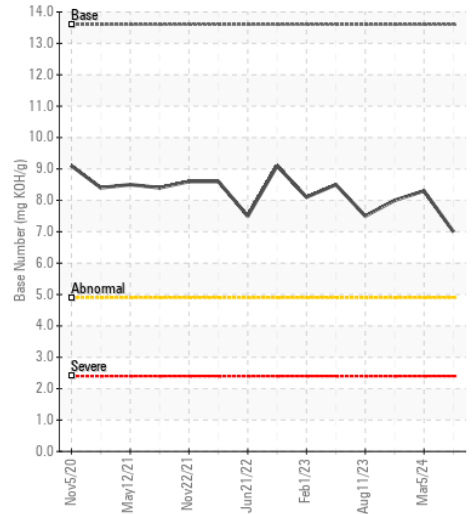

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0212046 **Received** : 25 Jun 2024  
**Lab Number** : 06219522 **Tested** : 26 Jun 2024  
**Unique Number** : 11097719 **Diagnosed** : 26 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292