



OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
Store 8 - Pikeville [152172]
Machine Id
JOHN DEERE 210G 1FF210GXHKF527549
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (6 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LEC0046363 | LEC0023630 | LEC0006719 |
| Sample Date | | Client Info | | 20 Jun 2024 | 26 Aug 2021 | 22 Jan 2020 |
| Machine Age | hrs | Client Info | | 2029 | 877 | 327 |
| Oil Age | hrs | Client Info | | 1152 | 550 | 327 |
| Filter Age | hrs | Client Info | | 550 | 550 | 327 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |

WEAR

The copper level has decreased, but is still abnormal. Cylinder, crank, or cam shaft wear is indicated.

| | | | | | | |
|--------------|--------|-------------|------|--------------|--------------|--------------|
| Iron | ppm | ASTM D5185m | >51 | ▲ 68 | 31 | 30 |
| Chromium | ppm | ASTM D5185m | >11 | 2 | 1 | 1 |
| Nickel | ppm | ASTM D5185m | >5 | 3 | 2 | 3 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >31 | 7 | 6 | 7 |
| Lead | ppm | ASTM D5185m | >26 | 2 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >26 | ▲ 62 | ▲ 309 | ▲ 386 |
| Tin | ppm | ASTM D5185m | >4 | 2 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >120 | 12 | 9 | 12 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 9 | 3 |
| Fuel | | WC Method | >2.1 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.21 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 1 | 0.5 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 12.5 | 10.8 | 9.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 27.2 | 26.2 | 22.4 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | >31 | 3 | 5 | 8 |
| Boron | ppm | ASTM D5185m | | 67 | 152 | 194 |
| Barium | ppm | ASTM D5185m | | 2 | 0 | 1 |
| Molybdenum | ppm | ASTM D5185m | | 231 | 234 | 225 |
| Manganese | ppm | ASTM D5185m | | 2 | 1 | 4 |
| Magnesium | ppm | ASTM D5185m | | 757 | 838 | 807 |
| Calcium | ppm | ASTM D5185m | | 1599 | 1623 | 1407 |
| Phosphorus | ppm | ASTM D5185m | | 840 | 802 | 784 |
| Zinc | ppm | ASTM D5185m | | 1114 | 998 | 932 |
| Sulfur | ppm | ASTM D5185m | | 2841 | 2266 | 2225 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 22.6 | 21.4 | 18.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 7.5 | 9.1 | 8.4 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.8 | 14.0 | 10.6 |

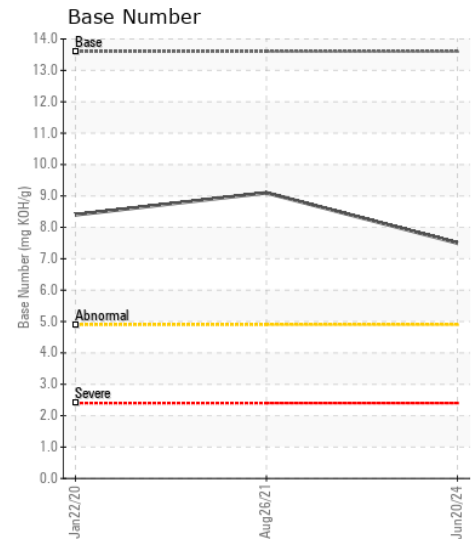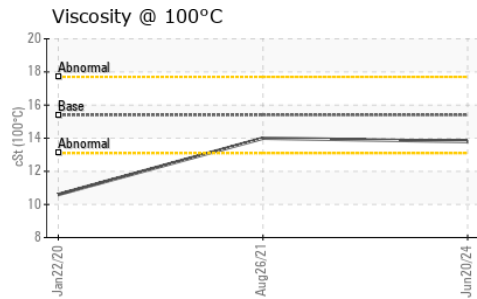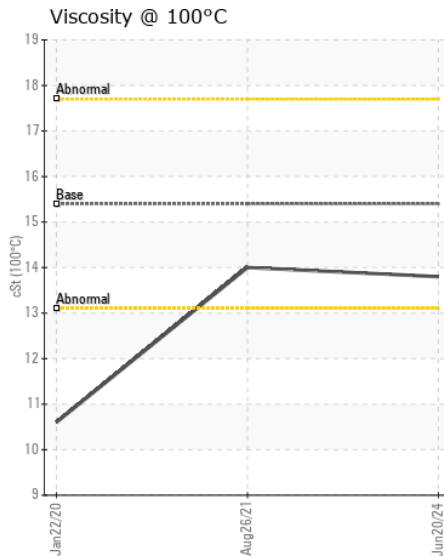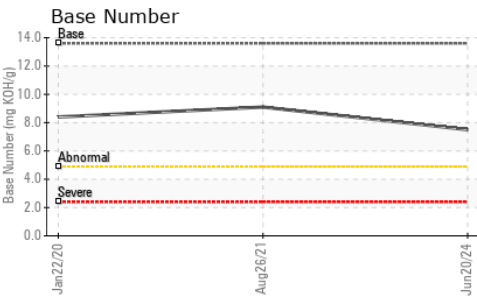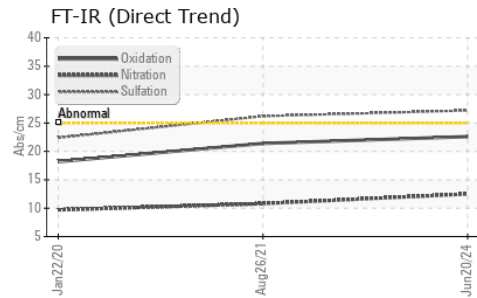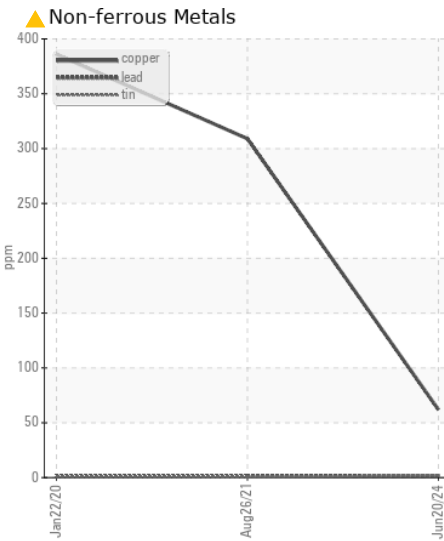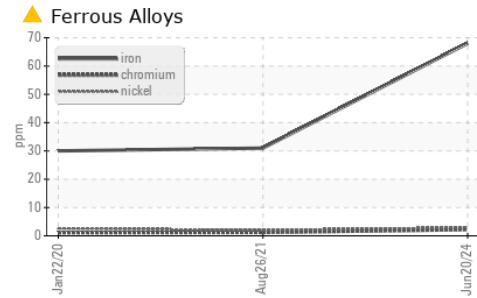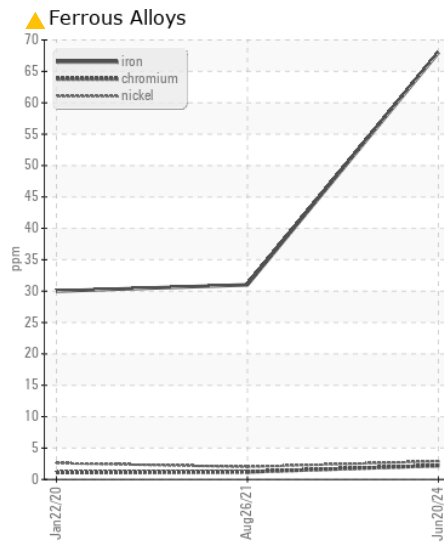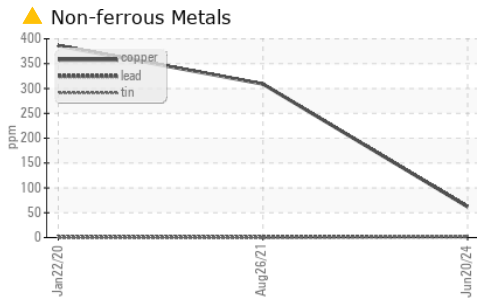

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0046363 **Received** : 25 Jun 2024
Lab Number : 06219529 **Tested** : 26 Jun 2024
Unique Number : 11097726 **Diagnosed** : 26 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570