



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 250G 1FF250GXCLF611628**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (21 QTS)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218601</b>	JR0211051	JR0208113
Sample Date		Client Info		<b>21 Jun 2024</b>	17 Apr 2024	08 Mar 2024
Machine Age	hrs	Client Info		<b>8093</b>	7808	7575
Oil Age	hrs	Client Info		<b>285</b>	233	3809
Filter Age	hrs	Client Info		<b>285</b>	233	3809
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	ABNORMAL

### WEAR

Valve wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>70</b>	45	51
Chromium	ppm	ASTM D5185m	>11	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m	>5	<b>▲ 9</b>	8	<b>▲ 11</b>
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>31	<b>7</b>	6	8
Lead	ppm	ASTM D5185m	>26	<b>1</b>	1	<1
Copper	ppm	ASTM D5185m	>26	<b>4</b>	3	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>10</b>	11	12
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	3
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	8.5	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.7</b>	22.2	21.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	<b>2</b>	3	4
Boron	ppm	ASTM D5185m		<b>175</b>	235	274
Barium	ppm	ASTM D5185m		<b>2</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>265</b>	248	325
Manganese	ppm	ASTM D5185m		<b>2</b>	2	<1
Magnesium	ppm	ASTM D5185m		<b>811</b>	790	1127
Calcium	ppm	ASTM D5185m		<b>1464</b>	1441	2001
Phosphorus	ppm	ASTM D5185m		<b>816</b>	935	1178
Zinc	ppm	ASTM D5185m		<b>1099</b>	1063	1487
Sulfur	ppm	ASTM D5185m		<b>2839</b>	3329	4345
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	16.9	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.2</b>	8.6	8.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.1	13.8

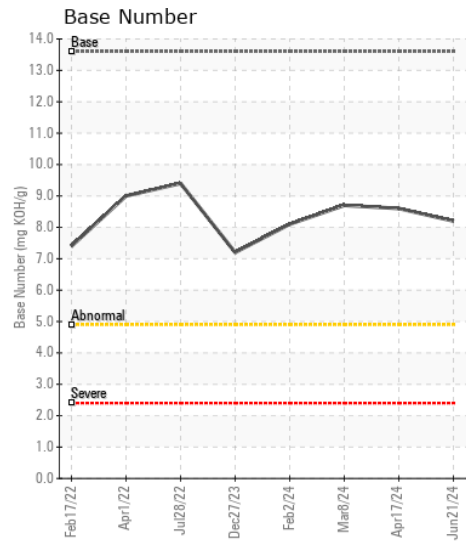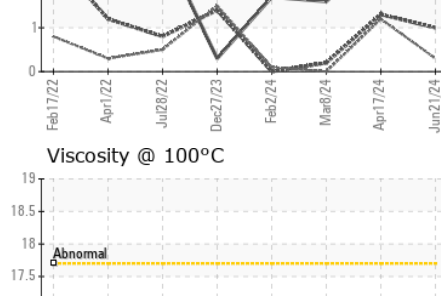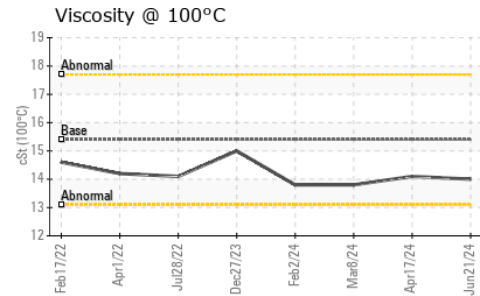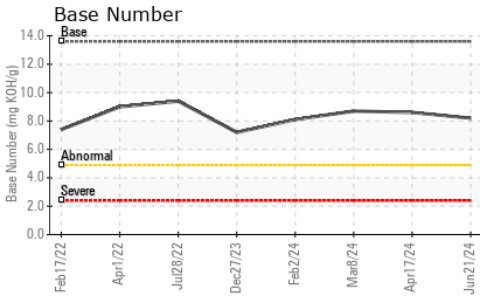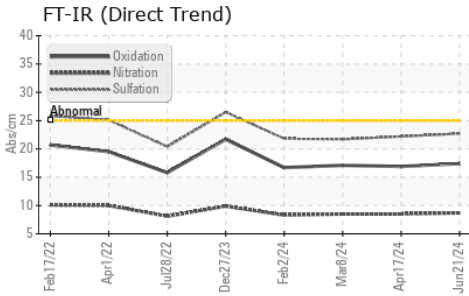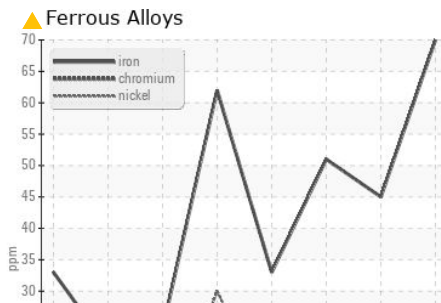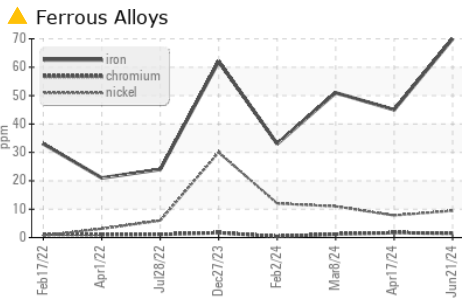

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218601 **Received** : 25 Jun 2024  
**Lab Number** : 06219538 **Tested** : 26 Jun 2024  
**Unique Number** : 11097735 **Diagnosed** : 26 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111

Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)