



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A30G ARD-88 (S/N 753084)
Component
1 Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004975	---	---
Sample Date		Client Info		21 Jun 2024	---	---
Machine Age	hrs	Client Info		2706	---	---
Oil Age	hrs	Client Info		2706	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel	%	ASTM D3524	>6.0	0.1	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	2.5	59	---	---
Barium	ppm	ASTM D5185m	0.0	1	---	---
Molybdenum	ppm	ASTM D5185m	0.7	32	---	---
Manganese	ppm	ASTM D5185m	0.0	<1	---	---
Magnesium	ppm	ASTM D5185m	256	388	---	---
Calcium	ppm	ASTM D5185m	2057	2138	---	---
Phosphorus	ppm	ASTM D5185m	935	912	---	---
Zinc	ppm	ASTM D5185m	1223	1208	---	---
Sulfur	ppm	ASTM D5185m	4079	2981	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	10.3	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	11.4	---	---

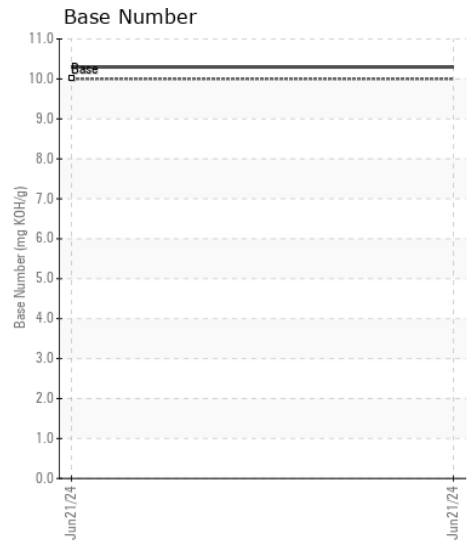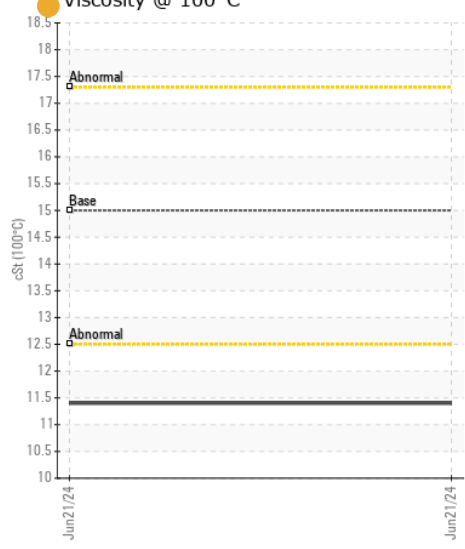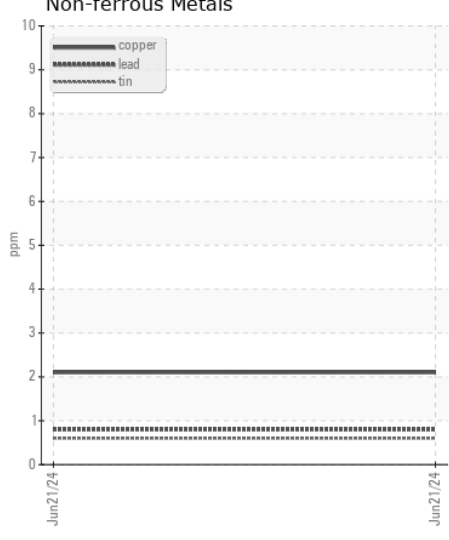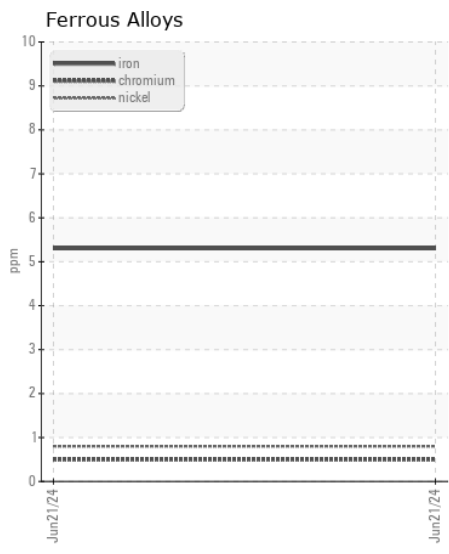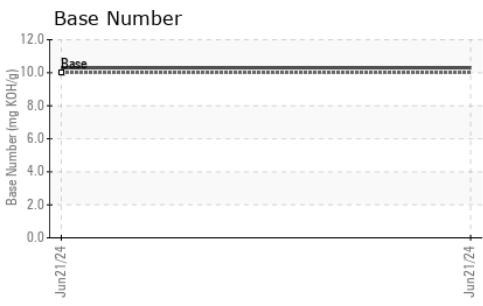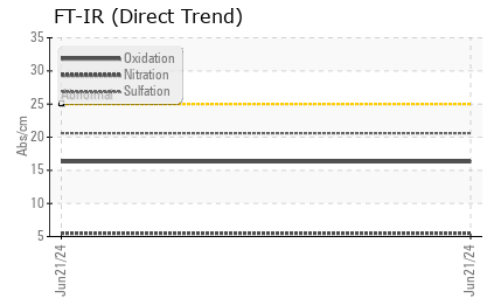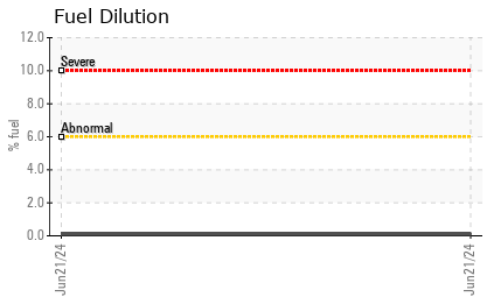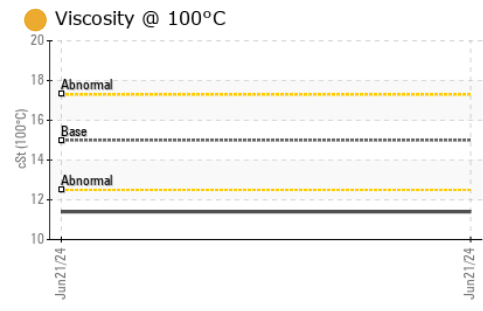

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0004975 **Received** : 25 Jun 2024
Lab Number : 06219550 **Tested** : 28 Jun 2024
Unique Number : 11097747 **Diagnosed** : 28 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

365 - ASCENDUM MACHINERY INC - SAVANNAH
 54 MEDLINE DR
 RICHMOND HILL, GA
 US 31324
 Contact: JESSE WILSON
 jesse.wilson@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (912)964-9515