



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Mobile Fleet
 Machine Id
6449 6449
 Component
Hydraulic System
 Fluid
MOBIL MOBILFLUID 424 (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947838	WC0902771	WC0861711
Sample Date		Client Info		21 Jun 2024	16 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		8095	7464	7103
Oil Age	hrs	Client Info		643	1068	707
Filter Age	hrs	Client Info		643	1068	707
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	5	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	2	<1
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>75	<1	2	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	10	10	12
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1149	2310	▲ 28217
Particles >6µm		ASTM D7647	>1300	328	715	▲ 9451
Particles >14µm		ASTM D7647	>160	33	58	▲ 169
Particles >21µm		ASTM D7647	>40	11	15	18
Particles >38µm		ASTM D7647	>10	1	1	1
Particles >71µm		ASTM D7647	>3	0	1	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/16/12	18/17/13	▲ 22/20/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	4
Boron	ppm	ASTM D5185m		120	113	116
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		18	12	10
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		52	60	57
Calcium	ppm	ASTM D5185m		3554	3344	3136
Phosphorus	ppm	ASTM D5185m		1153	1143	1035
Zinc	ppm	ASTM D5185m		1384	1409	1274
Sulfur	ppm	ASTM D5185m		8941	7413	6669
Acid Number (AN)	mg KOH/g	ASTM D8045		0.96	0.50	1.23
Visc @ 40°C	cSt	ASTM D445	55	48.8	48.6	48.4

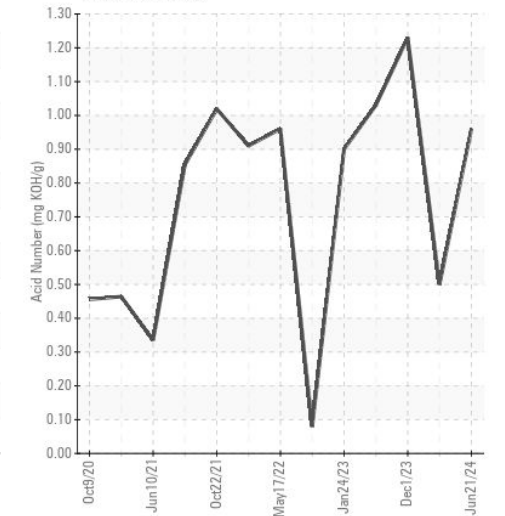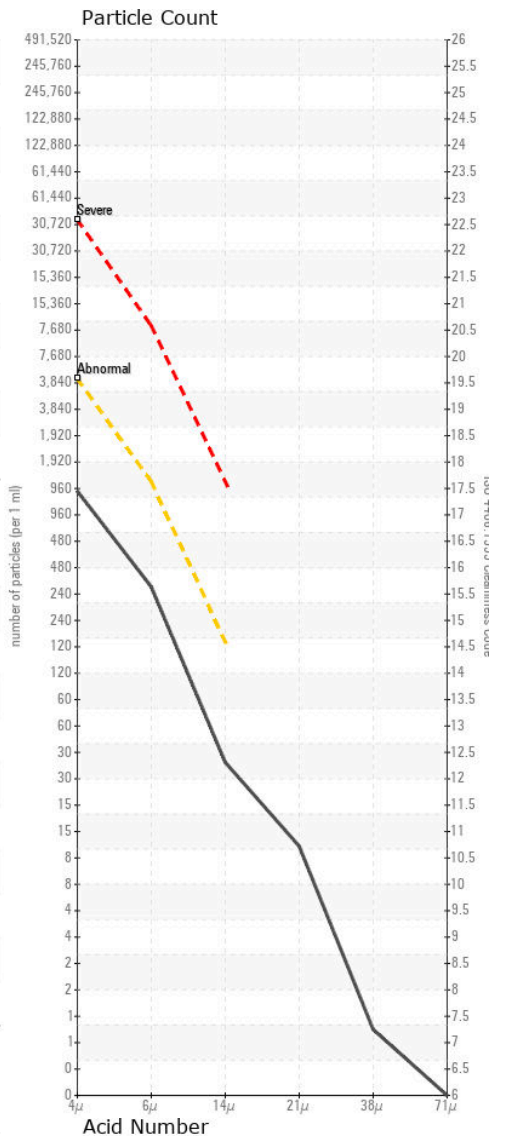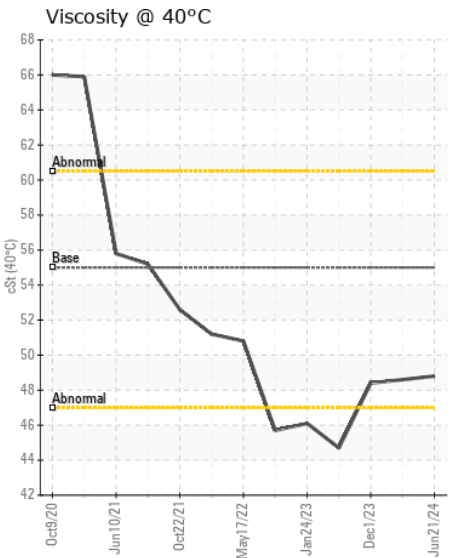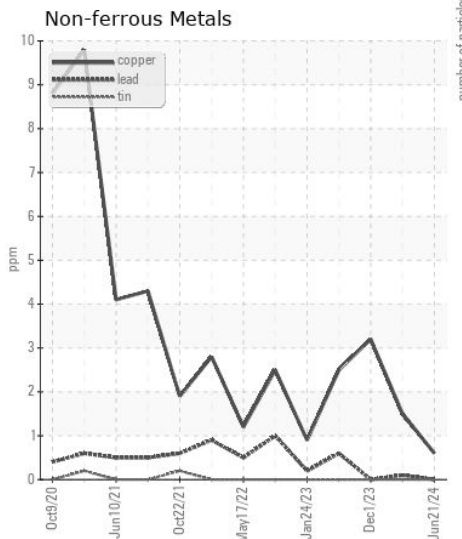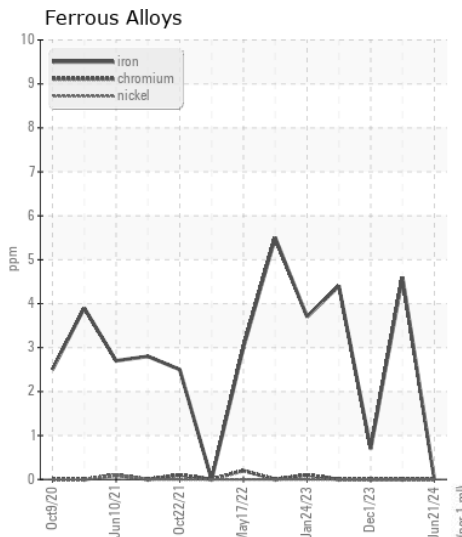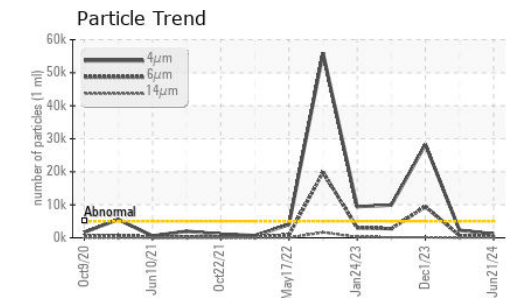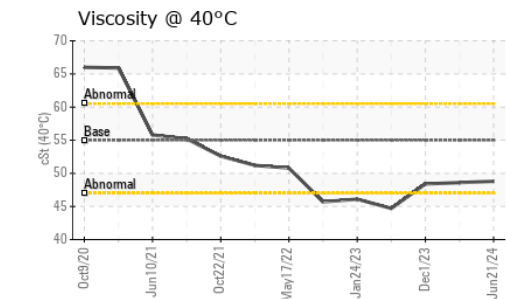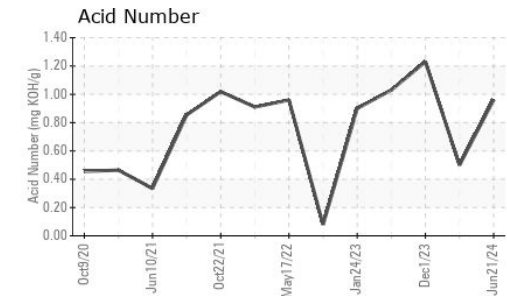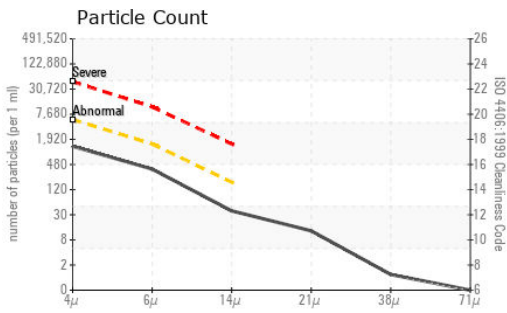

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0947838

Lab Number : 06219564

Unique Number : 11097761

Test Package : CONST

Received : 25 Jun 2024

Tested : 26 Jun 2024

Diagnosed : 26 Jun 2024 - Don Baldrige

CAROLINA SUNROCK

PO BOX 25

BUTNER, NC

US 27509

Contact: Leigh Dennis

rdennis@thesunrockgroup.com

T: (919)575-4505

F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)