



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

**[05W47555]**

Machine Id

**JOHN DEERE PM061171**

Component

**Hydraulic System**

Fluid

**JOHN DEERE HYDRAU (30 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218318</b>	JR0190176	JR0176362
Sample Date		Client Info		<b>21 Jun 2024</b>	23 Oct 2023	16 Jun 2023
Machine Age	hrs	Client Info		<b>2994</b>	2451	1947
Oil Age	hrs	Client Info		<b>2994</b>	0	1947
Filter Age	hrs	Client Info		<b>1000</b>	0	1947
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	6	5
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>1</b>	4	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	3
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>4201</b>	---	7597
Particles >6µm		ASTM D7647	>1300	<b>676</b>	---	964
Particles >14µm		ASTM D7647	>160	<b>71</b>	---	67
Particles >21µm		ASTM D7647	>40	<b>18</b>	---	19
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>19/17/13</b>	---	20/17/13
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	<1
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	4	2
Calcium	ppm	ASTM D5185m	87	<b>77</b>	167	67
Phosphorus	ppm	ASTM D5185m	727	<b>541</b>	534	550
Zinc	ppm	ASTM D5185m	900	<b>585</b>	620	591
Sulfur	ppm	ASTM D5185m	1500	<b>1643</b>	1633	1757
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.56</b>	0.9	0.49
Visc @ 40°C	cSt	ASTM D445	65	<b>51.0</b>	51.0	51.7

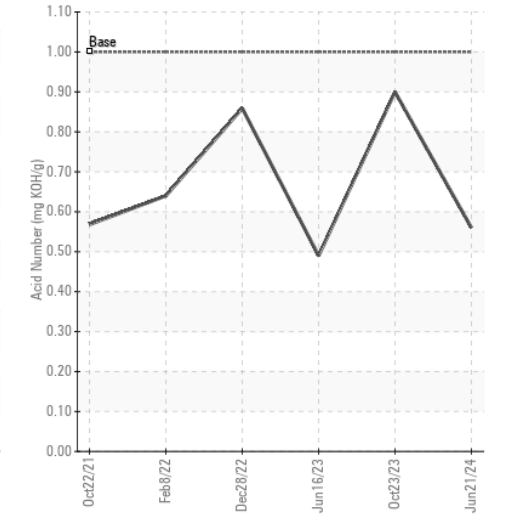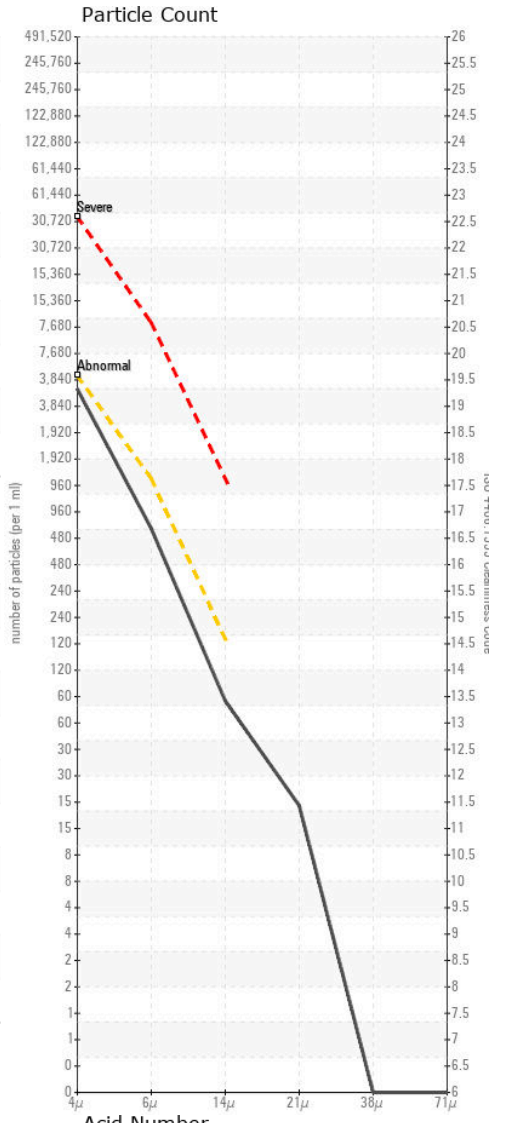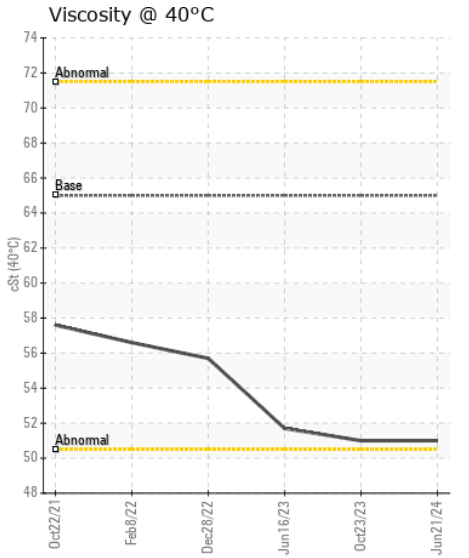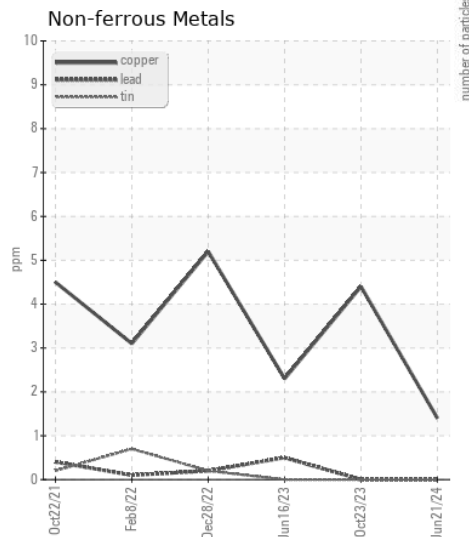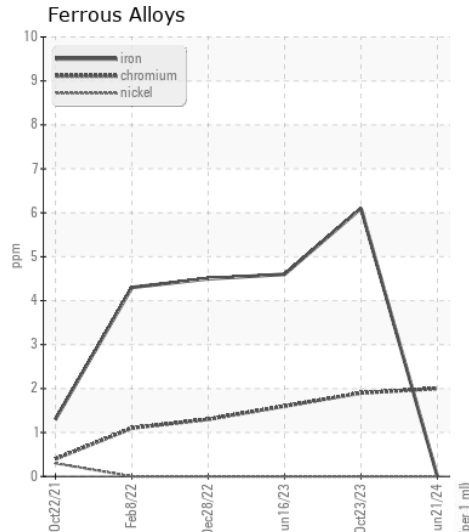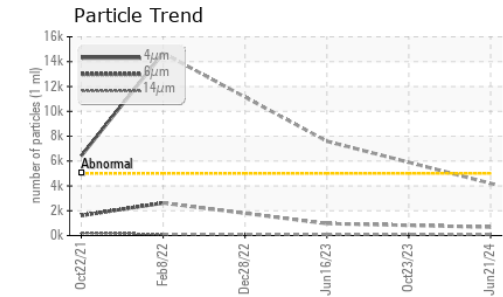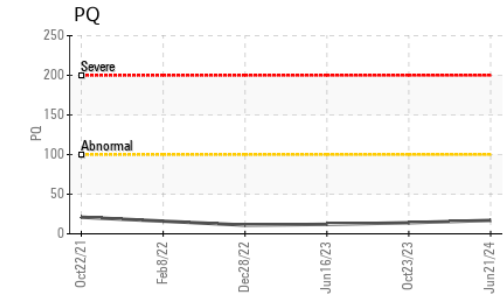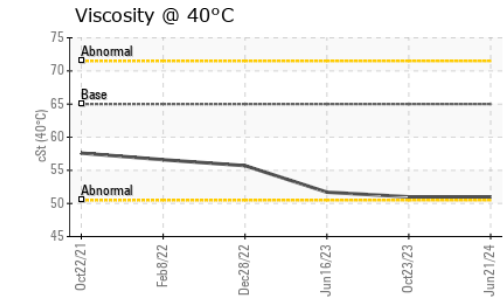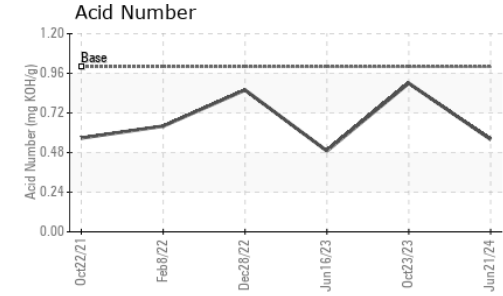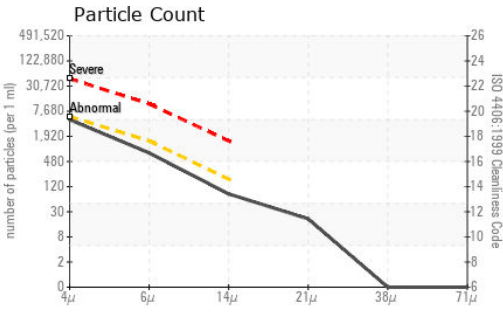

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218318 **Received** : 25 Jun 2024  
**Lab Number** : 06219582 **Tested** : 26 Jun 2024  
**Unique Number** : 11097779 **Diagnosed** : 26 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**FITZGERALD EXCAVATING**  
 PO BOX 2168  
 WINCHESTER, VA  
 US 22604  
 Contact: Service Manager

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: