



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[05W47555]**

Machine Id

**JOHN DEERE PM061171**

Component

**Transmission (Manual)**

Fluid

**JOHN DEERE HY-GARD HYD/TRANS (15 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218317</b>	JR0190177	JR0176363
Sample Date		Client Info		<b>21 Jun 2024</b>	23 Oct 2023	16 Jun 2023
Machine Age	hrs	Client Info		<b>2994</b>	2451	1947
Oil Age	hrs	Client Info		<b>1000</b>	0	1947
Filter Age	hrs	Client Info		<b>1000</b>	0	1947
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>16</b>	13	15
Iron	ppm	ASTM D5185m	>200	<b>14</b>	10	22
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	<1	0
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>4</b>	3	4
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	5	8
Boron	ppm	ASTM D5185m	6	<b>5</b>	4	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	5
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>112</b>	103	109
Calcium	ppm	ASTM D5185m	3570	<b>3577</b>	3176	3729
Phosphorus	ppm	ASTM D5185m	1290	<b>1124</b>	861	1154
Zinc	ppm	ASTM D5185m	1640	<b>1334</b>	1191	1379
Sulfur	ppm	ASTM D5185m		<b>4215</b>	3280	4536
Visc @ 40°C	cSt	ASTM D445	57.0	<b>49.6</b>	50.5	45.5

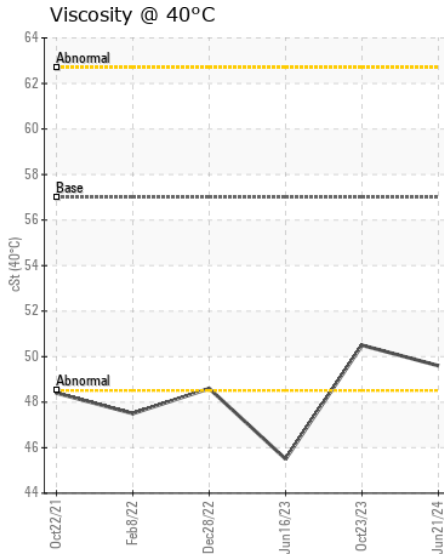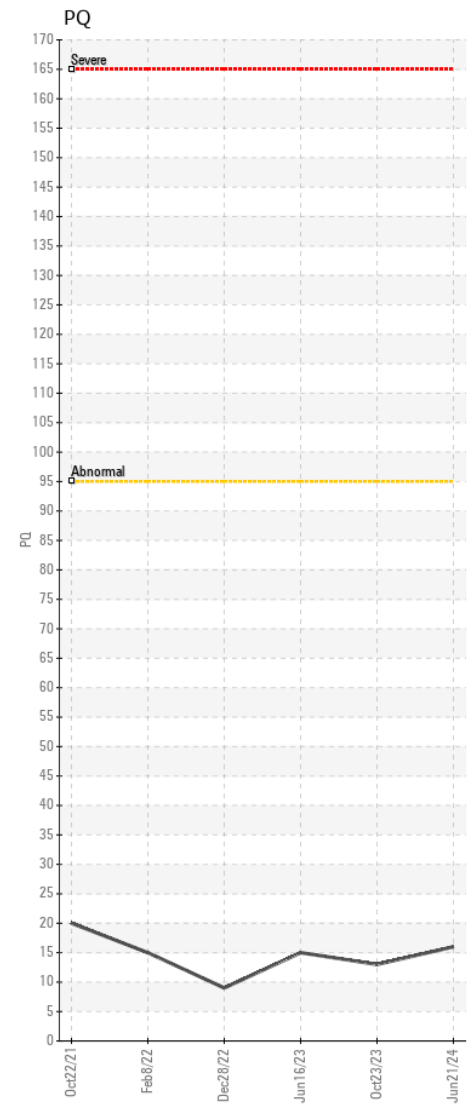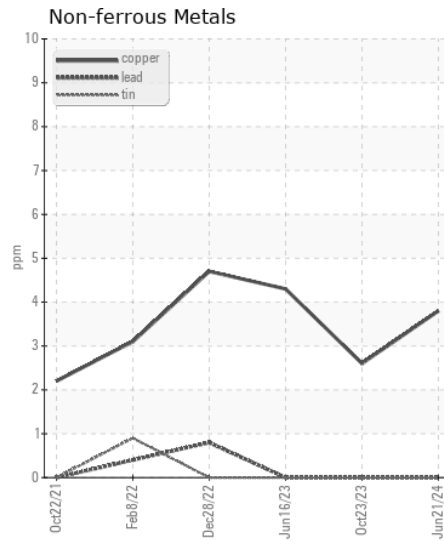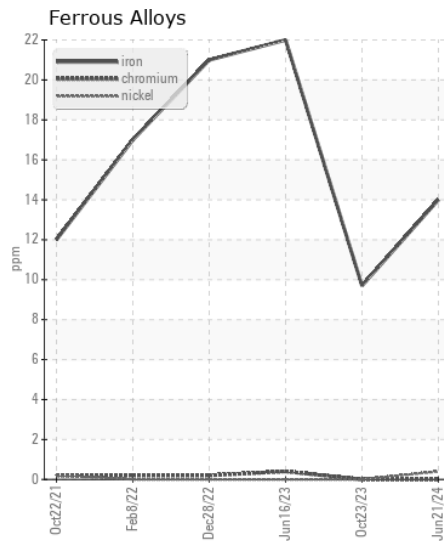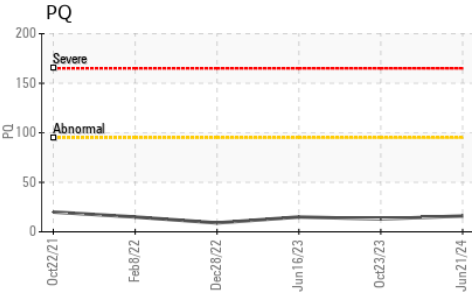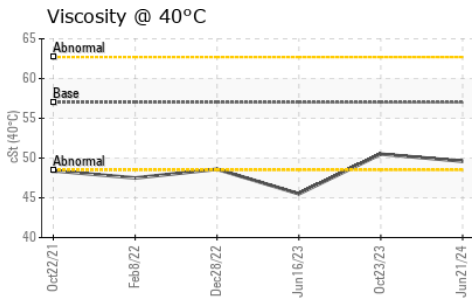

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218317 **Received** : 25 Jun 2024  
**Lab Number** : 06219943 **Tested** : 26 Jun 2024  
**Unique Number** : 11098140 **Diagnosed** : 26 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**FITZGERALD EXCAVATING**  
 PO BOX 2168  
 WINCHESTER, VA  
 US 22604  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: