



WEAR	SEVERE
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVEN JR0216865 - REDUCTION (S/N NO INFO ON SIF/BOTTLE)

Component
Right Gear Case
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

Gear wear is indicated.











CONTAMINATION

Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0216865	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184		271	---	---
Iron	ppm	ASTM D5185m	>200	▲ 939	---	---
Chromium	ppm	ASTM D5185m	>5	▲ 6	---	---
Nickel	ppm	ASTM D5185m	>5	▲ 5	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>5	4	---	---
Lead	ppm	ASTM D5185m	>5	<1	---	---
Copper	ppm	ASTM D5185m	>15	2	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>15	▲ 27	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		1	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m		93	---	---
Calcium	ppm	ASTM D5185m		3230	---	---
Phosphorus	ppm	ASTM D5185m		850	---	---
Zinc	ppm	ASTM D5185m		1176	---	---
Sulfur	ppm	ASTM D5185m		3841	---	---
Visc @ 40°C	cSt	ASTM D445		51.7	---	---

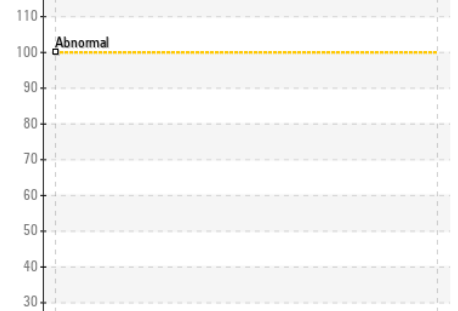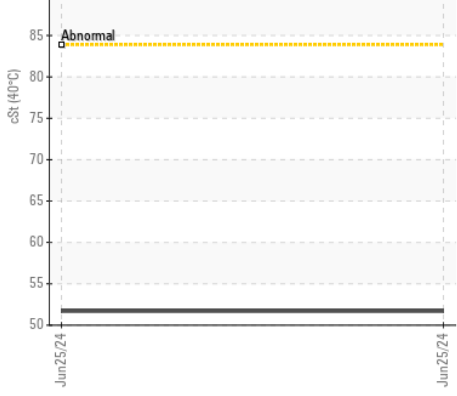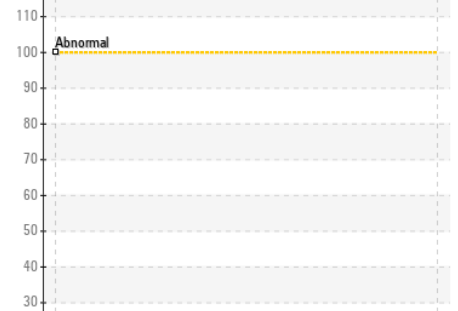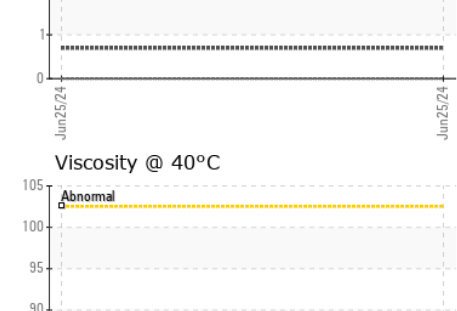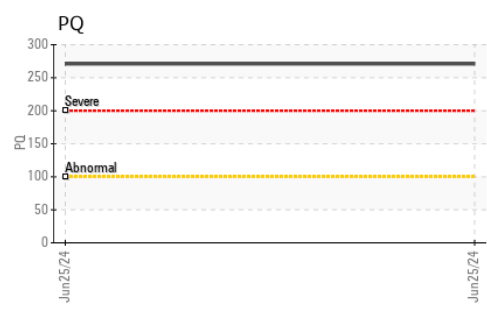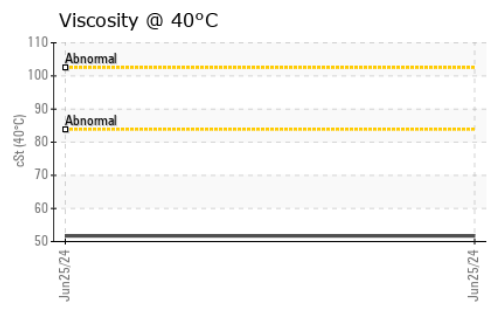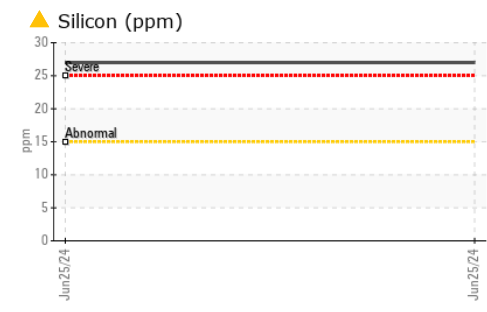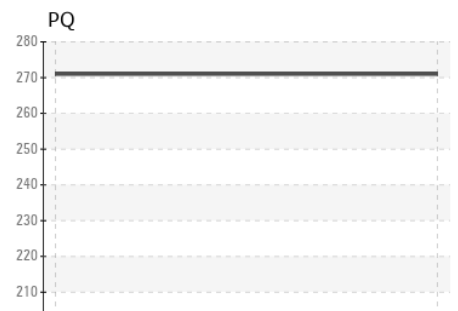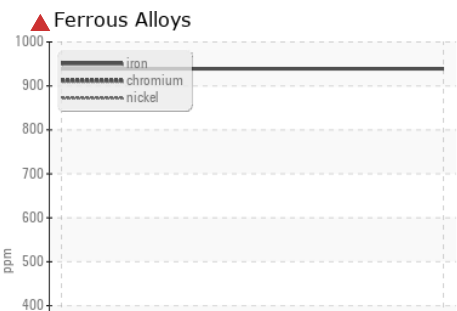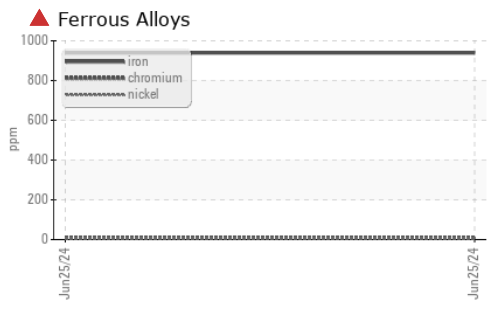

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0216865 **Received** : 25 Jun 2024
Lab Number : 06219999 **Tested** : 26 Jun 2024
Unique Number : 11098196 **Diagnosed** : 26 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - WAKEFIELD
 10489 GENERAL MAHONE HWY
 WAKEFIELD, VA
 US 23888
 Contact: KENDALL POPE
 KENDALL.POPE@JAMESRIVEREQUIPMENT.COM
 T:
 F: (757)899-6464

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)