



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E 1DW410ETKJF692851**  
Component  
**Center Differential**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0205518</b>	JR0085940	JR0079821
Sample Date		Client Info		<b>20 Jun 2024</b>	20 May 2021	01 Mar 2021
Machine Age	hrs	Client Info		<b>5004</b>	5004	4568
Oil Age	hrs	Client Info		<b>4266</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>34</b>	18	20
Iron	ppm	ASTM D5185m	>500	<b>48</b>	34	38
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	1	0
Lead	ppm	ASTM D5185m	>25	<b>12</b>	22	25
Copper	ppm	ASTM D5185m	>100	<b>3</b>	2	10
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>6</b>	6	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	4	<1
Boron	ppm	ASTM D5185m	6	<b>3</b>	10	5
Barium	ppm	ASTM D5185m	0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	<1	1
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	1
Magnesium	ppm	ASTM D5185m	145	<b>96</b>	98	95
Calcium	ppm	ASTM D5185m	3570	<b>3289</b>	3509	3398
Phosphorus	ppm	ASTM D5185m	1290	<b>876</b>	1018	1018
Zinc	ppm	ASTM D5185m	1640	<b>1186</b>	1218	1138
Sulfur	ppm	ASTM D5185m		<b>3362</b>	3252	3152
Visc @ 40°C	cSt	ASTM D445	57.0	<b>56.2</b>	53.1	51.3

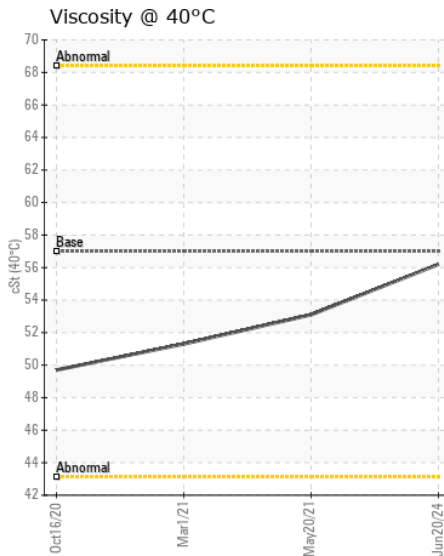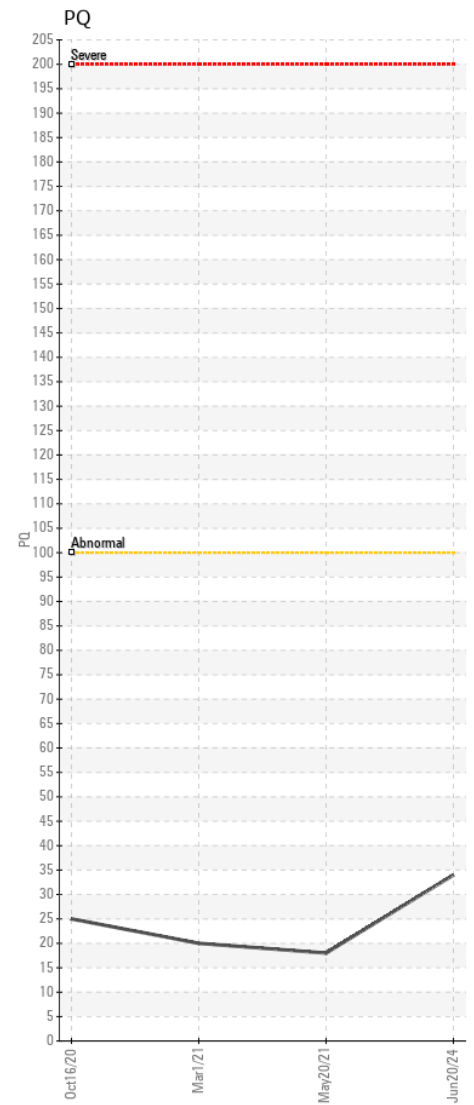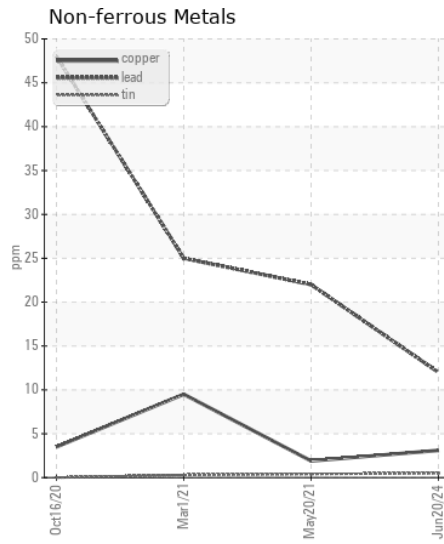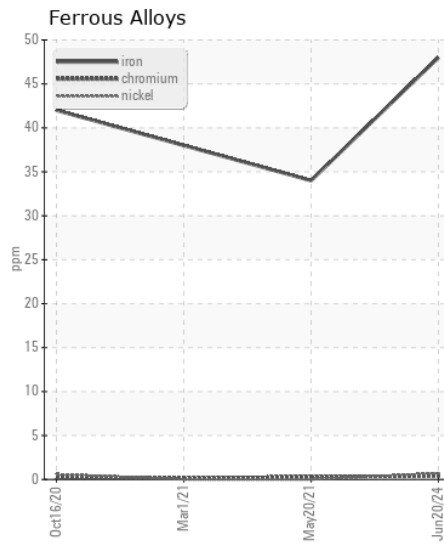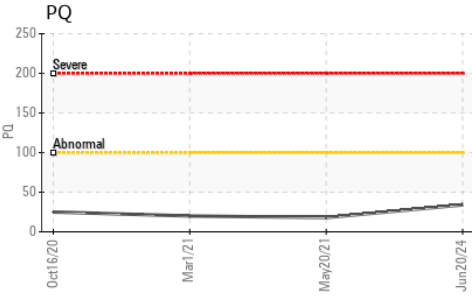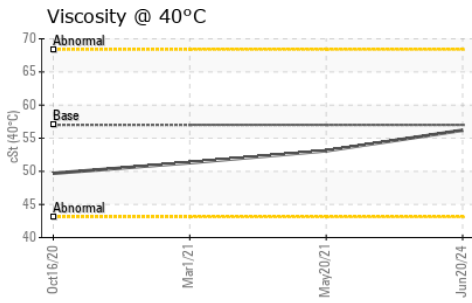

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0205518

**Lab Number** : 06220005

**Unique Number** : 11098202

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 25 Jun 2024

**Tested** : 26 Jun 2024

**Diagnosed** : 26 Jun 2024 - Wes Davis

**JRE - CHARLOTTE**

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: CHARLOTTE SHOP

myoung@jamesriverequipment.com

T: (704)597-0211

F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)