



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**NOT GIVEN JR0220017 (S/N NO INFO ON SIF/BOTTLE)**

Component  
**Front Differential**  
 Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0220017</b>	---	---
Sample Date		Client Info		<b>25 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

Bearing and/or bushing wear is indicated.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>31</b>	---	---
Iron	ppm	ASTM D5185m	>500	<b>102</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>▲ 29</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>▲ 226</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	<b>9</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Boron	ppm	ASTM D5185m	10	<b>4</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>7</b>	---	---
Molybdenum	ppm	ASTM D5185m	10	<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m	100	<b>113</b>	---	---
Calcium	ppm	ASTM D5185m	3500	<b>4080</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1106</b>	---	---
Zinc	ppm	ASTM D5185m	1150	<b>1437</b>	---	---
Sulfur	ppm	ASTM D5185m	5000	<b>4359</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>52.3</b>	---	---

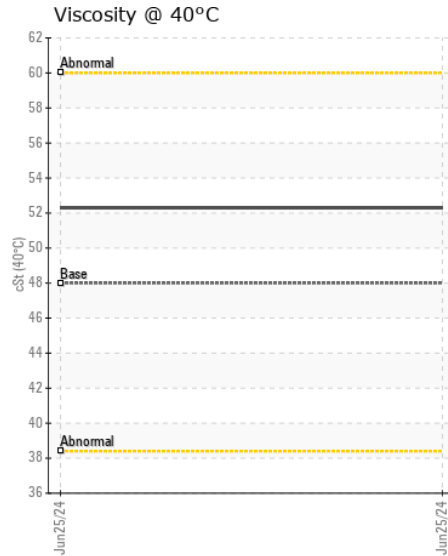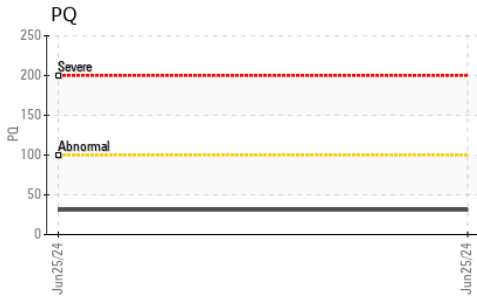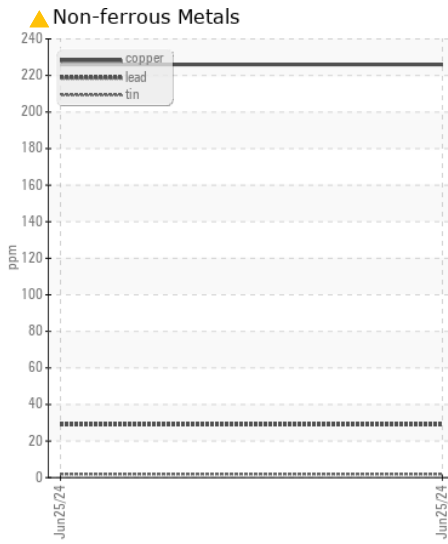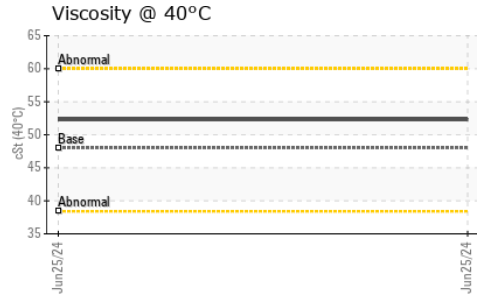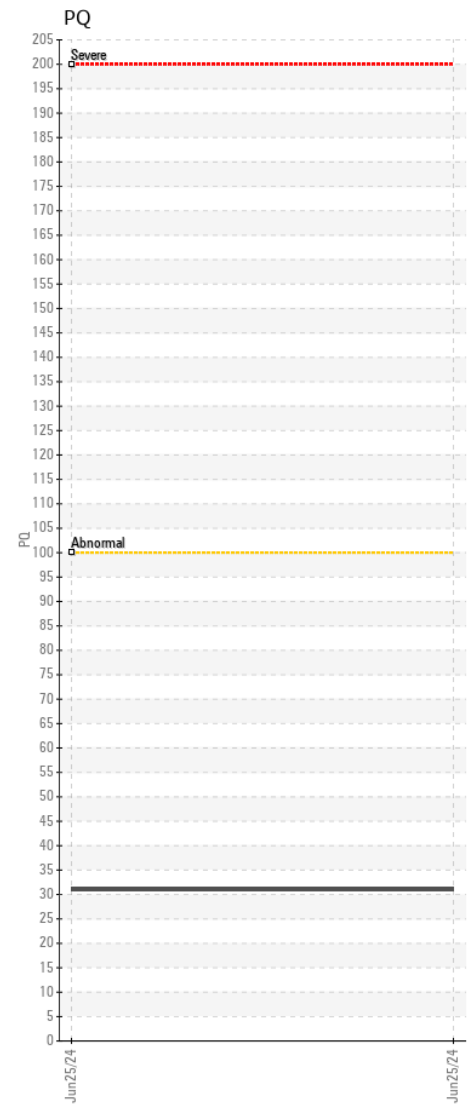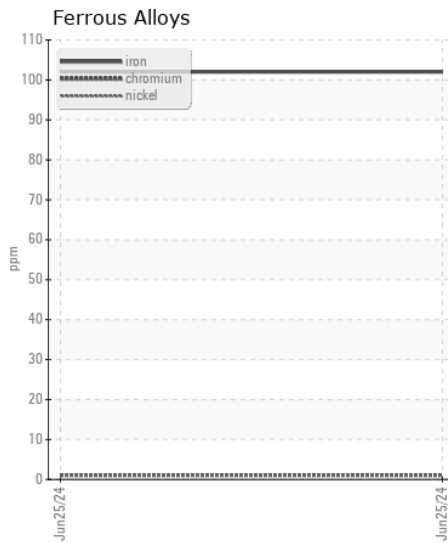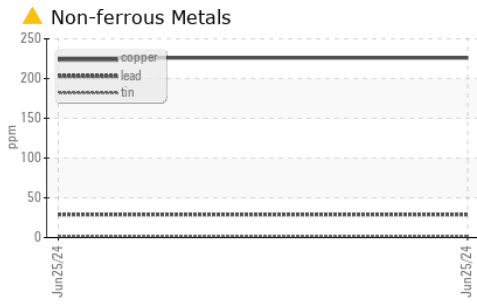

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0220017 **Received** : 25 Jun 2024  
**Lab Number** : 06220008 **Tested** : 26 Jun 2024  
**Unique Number** : 11098205 **Diagnosed** : 26 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211  
 F: (704)596-6198