



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350P 1FF350PAHNF000054**  
 Component  
**Left Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.







### CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218646</b>	JR0184063	JR0160321
Sample Date		Client Info		<b>21 Jun 2024</b>	28 Aug 2023	03 Feb 2023
Machine Age	hrs	Client Info		<b>1486</b>	938	439
Oil Age	hrs	Client Info		<b>1486</b>	938	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	N/A	Not Changd
Filter Changed		Client Info		<b>None</b>	N/A	Not Changd
Sample Status				<b>ABNORMAL</b>	NORMAL	ABNORMAL
PQ		ASTM D8184	>1250	<b>22</b>	234	154
Iron	ppm	ASTM D5185m	>750	<b>223</b>	268	249
Chromium	ppm	ASTM D5185m	>9	<b>4</b>	4	4
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>2</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	3	1
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>40	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	<b>14</b>	14	13
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	LIGHT	<b>▲ MODER</b>
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	<1	1
Boron	ppm	ASTM D5185m		<b>74</b>	91	86
Barium	ppm	ASTM D5185m		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>5</b>	5	5
Magnesium	ppm	ASTM D5185m		<b>2</b>	2	0
Calcium	ppm	ASTM D5185m		<b>0</b>	15	17
Phosphorus	ppm	ASTM D5185m		<b>478</b>	524	491
Zinc	ppm	ASTM D5185m		<b>13</b>	7	10
Sulfur	ppm	ASTM D5185m		<b>13427</b>	18469	17112
Visc @ 40°C	cSt	ASTM D445		<b>184</b>	187	187

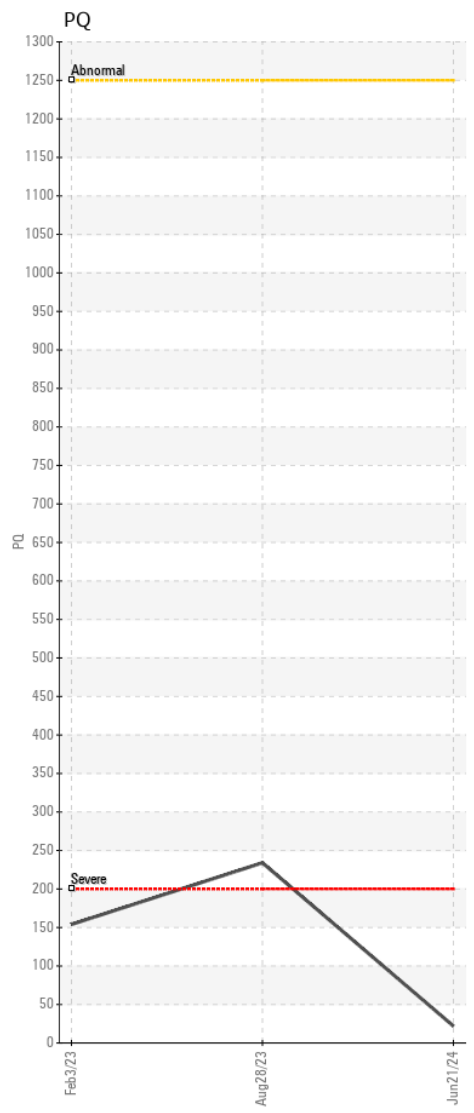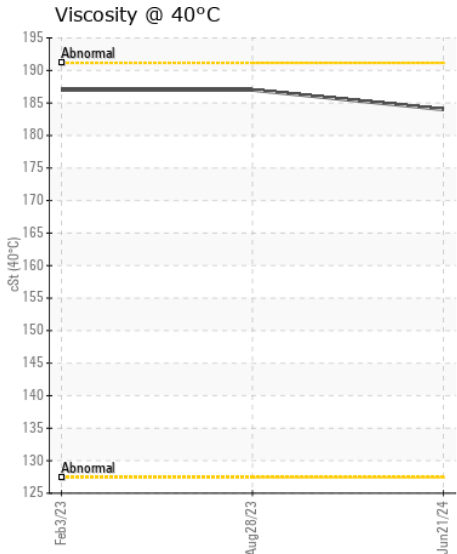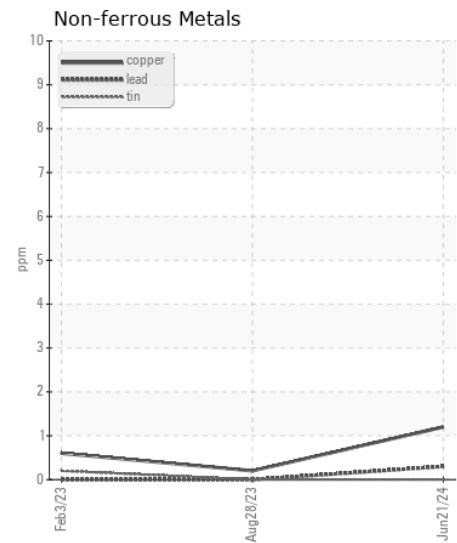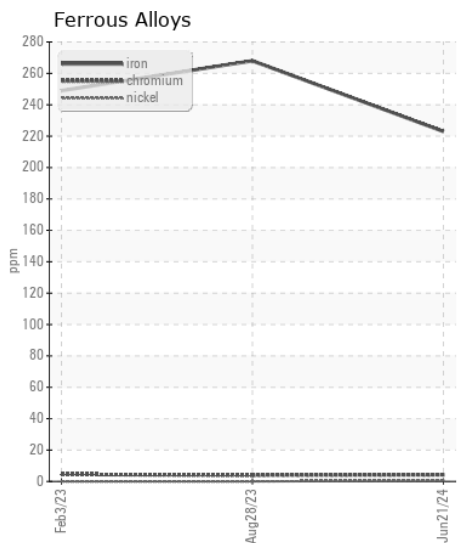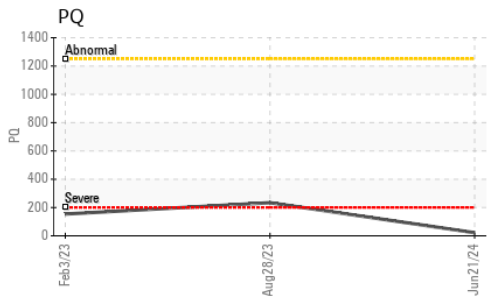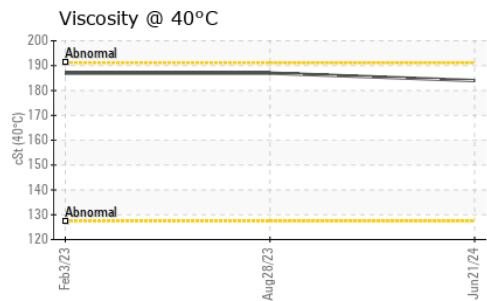

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218646 **Received** : 25 Jun 2024  
**Lab Number** : 06220013 **Tested** : 26 Jun 2024  
**Unique Number** : 11098210 **Diagnosed** : 26 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - MANASSAS PARK**  
 9107 OWENS DRIVE  
 MANASSAS PARK, VA  
 US 20111  
 Contact: DON VEST  
 dvest@jamesriverequipment.com  
 T: (703)631-8500  
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)