



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W47452]

Machine Id

JOHN DEERE PM061215

Component

Left Final Drive

Fluid

JOHN DEERE GL-5 80W90 (10 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION







The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218261	JR0208327	JR0192473
Sample Date		Client Info		21 Jun 2024	18 Mar 2024	28 Nov 2023
Machine Age	hrs	Client Info		2537	2045	1509
Oil Age	hrs	Client Info		492	1477	568
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

PQ		ASTM D8184	>1250	75	155	532
Iron	ppm	ASTM D5185m	>750	183	474	337
Chromium	ppm	ASTM D5185m	>9	3	6	4
Nickel	ppm	ASTM D5185m	>10	2	2	<1
Titanium	ppm	ASTM D5185m		2	2	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>40	7	6	1
Lead	ppm	ASTM D5185m	>15	<1	<1	0
Copper	ppm	ASTM D5185m	>40	<1	1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	45	47	20
Potassium	ppm	ASTM D5185m	>20	2	2	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>51	1	0	0
Boron	ppm	ASTM D5185m		12	36	35
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		1	1	1
Manganese	ppm	ASTM D5185m		3	6	4
Magnesium	ppm	ASTM D5185m		3	4	3
Calcium	ppm	ASTM D5185m		0	21	11
Phosphorus	ppm	ASTM D5185m		392	456	488
Zinc	ppm	ASTM D5185m		6	14	0
Sulfur	ppm	ASTM D5185m		18190	19886	19812
Visc @ 40°C	cSt	ASTM D445		139	144	144

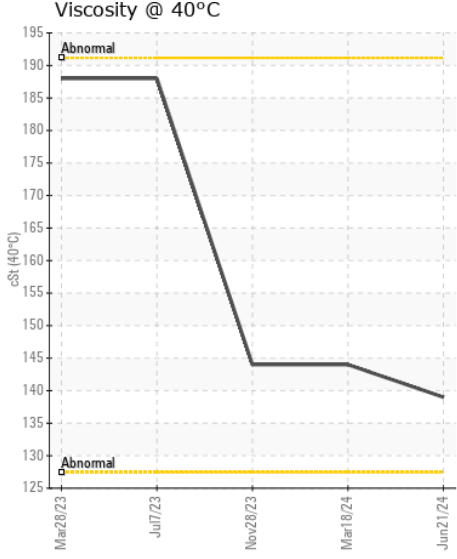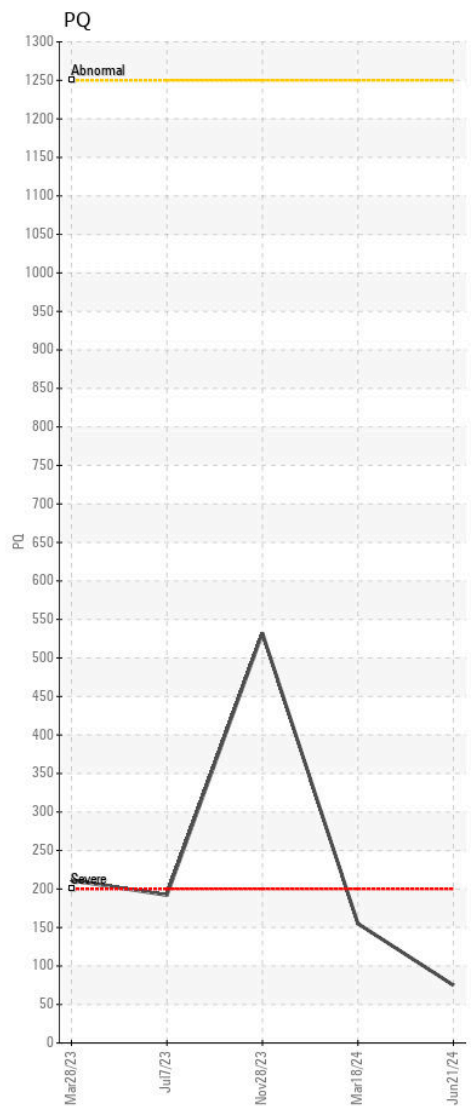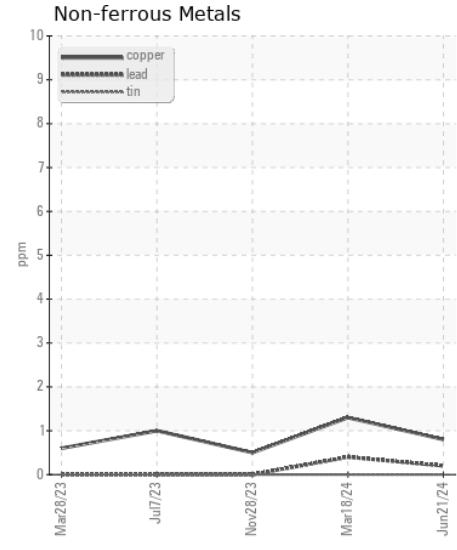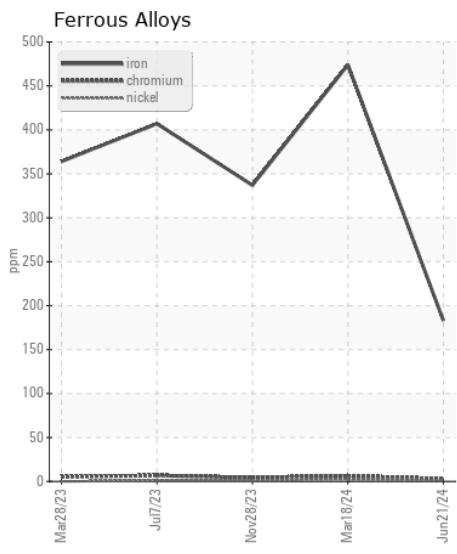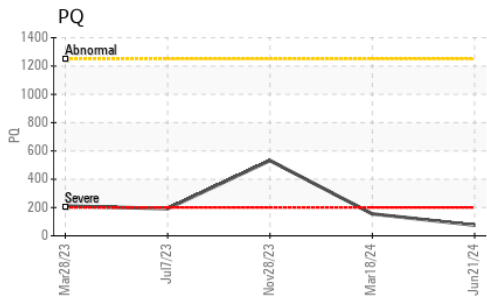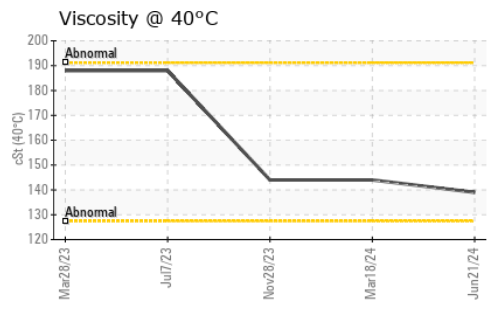

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218261 **Received** : 25 Jun 2024
Lab Number : 06220047 **Tested** : 26 Jun 2024
Unique Number : 11098244 **Diagnosed** : 27 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

FITZGERALD EXCAVATING
 PO BOX 2168
 WINCHESTER, VA
 US 22604
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: